



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**KANSAS/44**  
Machine Id  
**53.168L [KANSAS^44]**  
Component  
**Right Final Drive**  
Fluid  
**MOBIL MOBILTRANS HD 50 (0 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0918161</b>	WC0630433	---
Sample Date		Client Info		<b>08 Apr 2024</b>	15 Feb 2022	---
Machine Age	hrs	Client Info		<b>2010</b>	506	---
Oil Age	hrs	Client Info		<b>2010</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	<b>730</b>	142	---
Chromium	ppm	ASTM D5185m	>10	<b>12</b>	2	---
Nickel	ppm	ASTM D5185m	>5	<b>2</b>	<1	---
Titanium	ppm	ASTM D5185m	>15	<b>2</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	---
Aluminum	ppm	ASTM D5185m	>75	<b>20</b>	2	---
Lead	ppm	ASTM D5185m	>10	<b>1</b>	<1	---
Copper	ppm	ASTM D5185m	>75	<b>4</b>	1	---
Tin	ppm	ASTM D5185m	>8	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	<b>115</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	3	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>8</b>	6	---
Boron	ppm	ASTM D5185m		<b>193</b>	235	---
Barium	ppm	ASTM D5185m		<b>3</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>2</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>6</b>	1	---
Magnesium	ppm	ASTM D5185m		<b>12</b>	<1	---
Calcium	ppm	ASTM D5185m		<b>2068</b>	14	---
Phosphorus	ppm	ASTM D5185m		<b>1360</b>	1422	---
Zinc	ppm	ASTM D5185m		<b>905</b>	14	---
Sulfur	ppm	ASTM D5185m		<b>12008</b>	21779	---
Visc @ 40°C	cSt	ASTM D445	195	<b>138</b>	165	---

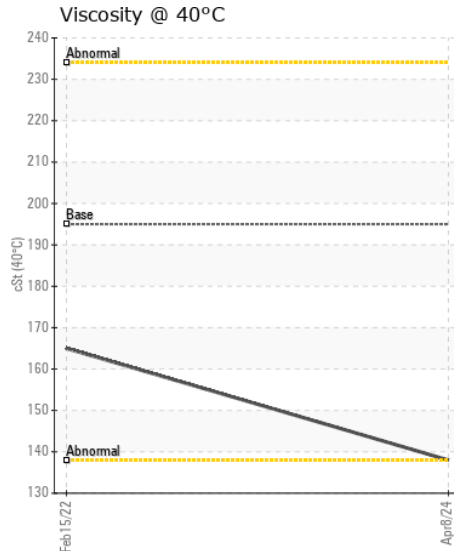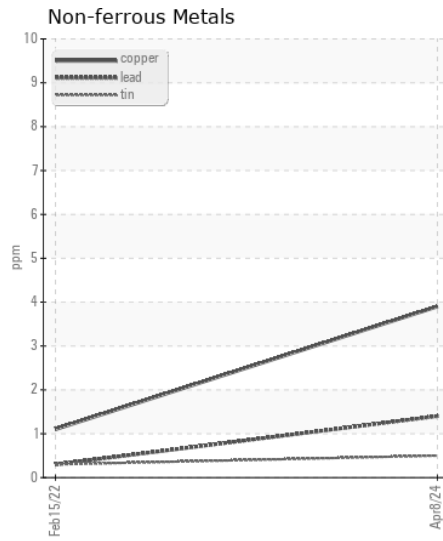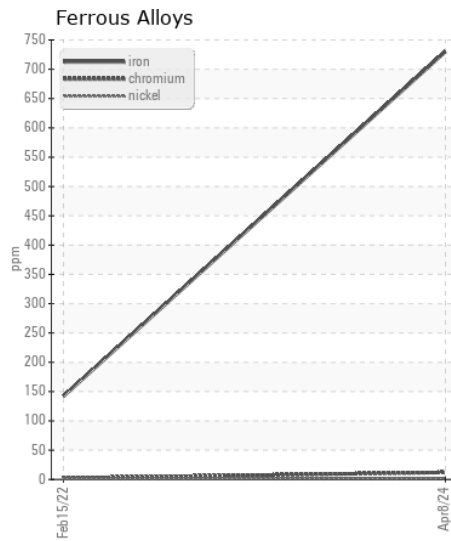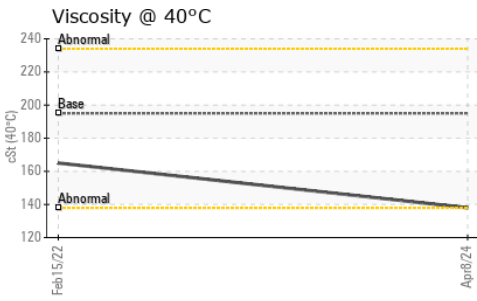

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0918161  
**Lab Number** : 06152402  
**Unique Number** : 10982480  
**Test Package** : CONST

**Received** : 17 Apr 2024  
**Tested** : 18 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Don Baldrige

**SHERWOOD CONSTRUCTION CO INC**  
 3219 WEST MAY ST  
 WICHITA, KS  
 US 67213

Contact: RANDY ROBERTS  
 randy.roberts@sherwood.net

T: (316)943-6491

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)