

53.5

-43

fail

Red

CATERPILLAR 963K TL3631 (S/N 0LBL00127)

Radiator Coolant

CAT EXTENDED LIFE COOLANT (ELC) (--- GAL)

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
The fluid is suitable for further service.	Sample Number		Client Info		DC0033839		
	Sample Date		Client Info		16 Apr 2024		
	Machine Age	hrs	Client Info		2543		
	Oil Age	hrs	Client Info		2543		
	Filter Age	hrs	Client Info		0		
	Oil Changed		Client Info		Not Changd		
	Filter Changed		Client Info		N/A		
	Sample Status				NORMAL		
WEAR	Total Dissolved Solids				436.0		
	Coolant Appearance		*Visual	Clear	normal		
CONTAMINATION	Water		WC Method		NEG		
FLUID CONDITION nation in the coolant.	Boiling Point	°C	WC Method		226		
Glycol and nitrite levels are acceptable. The pH level of this fluid is within the acceptable limits.	Specific Gravity		*ASTM D1298		1.072		
	рН	Scale 0-14	ASTM D1287		7.88		
	Nitrites	ppm	AP-053:2009		676		

Reserve Alkalinity Scale 0-20 *ASTM D1121

Percentage Glycol %

Freezing Point °F


Carboxylate


Coolant Color

ASTM D3321

ASTM D3321

*Visual

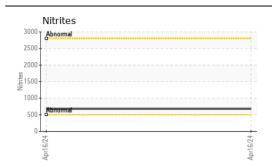

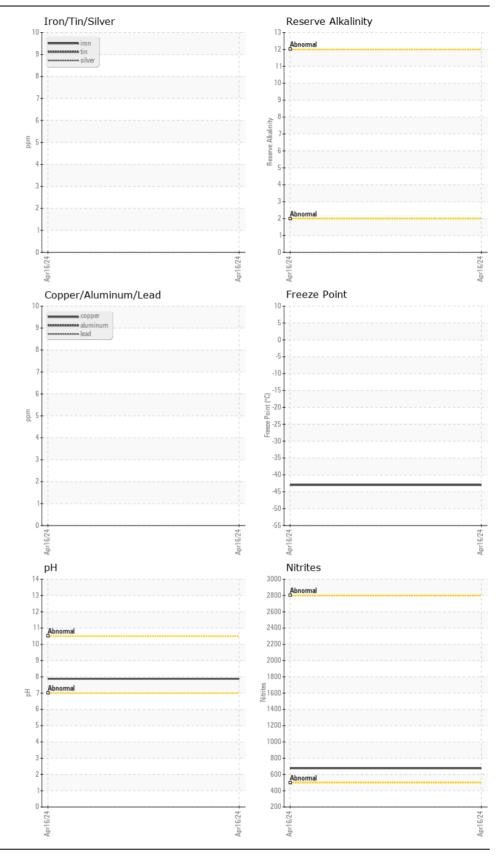

COMER CONSTRUCTION Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : DC0033839 Received 2100 SLADE LANE : 17 Apr 2024 Lab Number : 06152482 FOREST HILL, MD Tested : 18 Apr 2024 Unique Number : 10982560 US 21050 Diagnosed : 22 Apr 2024 - Jonathan Hester Test Package : COOL- (Additional Tests: BoilingPoint, COOL, GlycolType) Contact: DONALD FOX Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. dfox@comerconstruction.com * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: (443)269-1379 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (410)638-0289