



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 3884
 Component
Diesel Engine
 Fluid
CHEVRON DELO 400 XLE 10W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0882065	WC0831741	---
Sample Date		Client Info		10 Apr 2024	06 Oct 2023	---
Machine Age	mls	Client Info		533403	492075	---
Oil Age	mls	Client Info		41328	37212	---
Filter Age	mls	Client Info		41328	37212	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	24	33	---
Chromium	ppm	ASTM D5185m	>20	2	1	---
Nickel	ppm	ASTM D5185m	>4	2	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	<1	0	---
Aluminum	ppm	ASTM D5185m	>20	5	8	---
Lead	ppm	ASTM D5185m	>40	2	<1	---
Copper	ppm	ASTM D5185m	>330	4	4	---
Tin	ppm	ASTM D5185m	>15	2	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	14	18	---
Potassium	ppm	ASTM D5185m	>20	7	10	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.5	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	10.0	10.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.4	22.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	4	---
Boron	ppm	ASTM D5185m		35	21	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		3	2	---
Manganese	ppm	ASTM D5185m		2	<1	---
Magnesium	ppm	ASTM D5185m		755	774	---
Calcium	ppm	ASTM D5185m	2900	1410	1465	---
Phosphorus	ppm	ASTM D5185m	1100	822	752	---
Zinc	ppm	ASTM D5185m	1200	885	899	---
Sulfur	ppm	ASTM D5185m	4000	3583	3180	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	17.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	6.5	5.6	---
Visc @ 100°C	cSt	ASTM D445	11.9	11.6	11.7	---

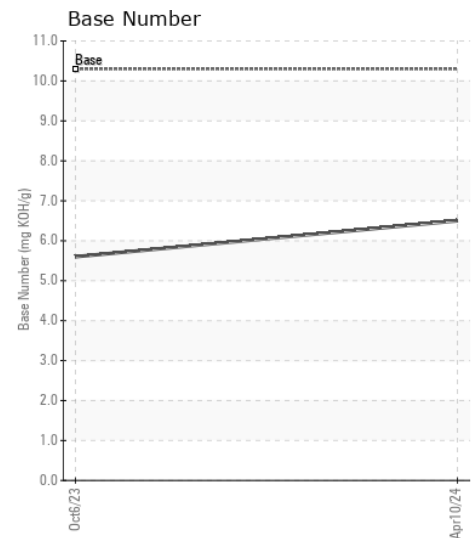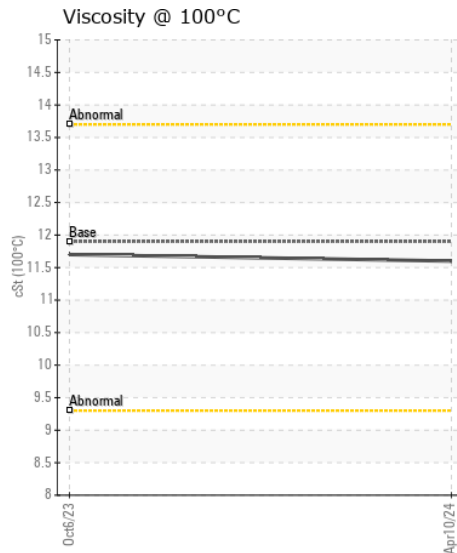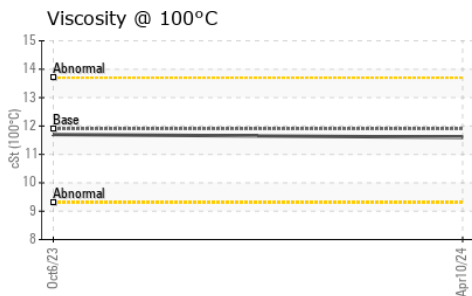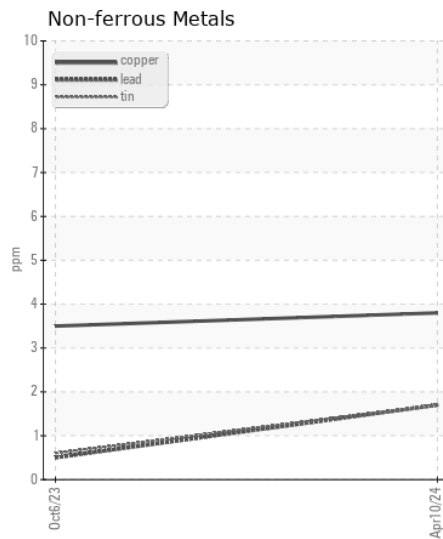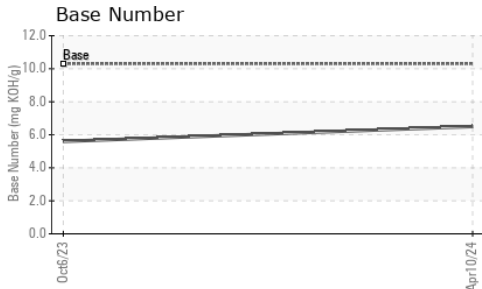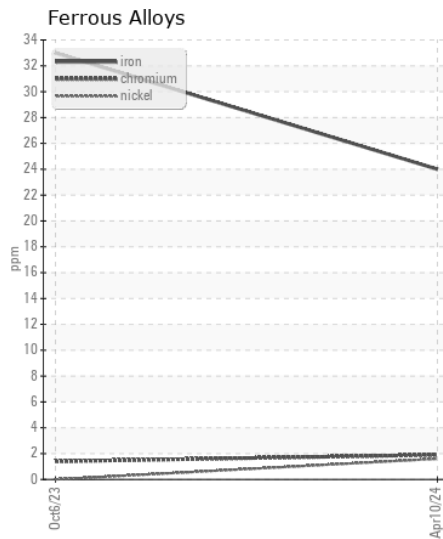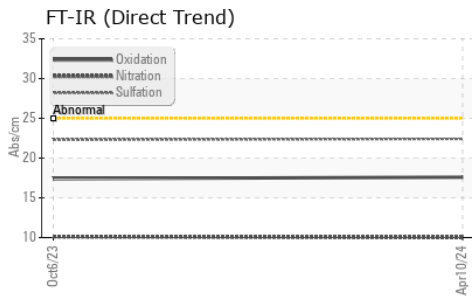

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0882065

Lab Number : 06152523

Unique Number : 10982601

Test Package : FLEET

Received : 17 Apr 2024

Tested : 18 Apr 2024

Diagnosed : 18 Apr 2024 - Wes Davis

LTI/MILKY WAY - SEATTLE

6110 WEST MARGINAL WAY SW

SEATTLE, WA

US 98106

Contact: TIM TURNBULL

tturnbul@lynden.com

T: (206)892-2600

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)