



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624P RT6636 (S/N 1DW624PACNLZ14252)
 Component
Front Axle
 Fluid
JOHN DEERE HY-GARD HYDRAULIC/RANSMISSION (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DC0035674	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		732	---	---
Oil Age	hrs	Client Info		732	---	---
Filter Age	hrs	Client Info		250	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>750	83	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>21	<1	---	---
Lead	ppm	ASTM D5185m	>49	95	---	---
Copper	ppm	ASTM D5185m	>101	179	---	---
Tin	ppm	ASTM D5185m	>10	2	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	5	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>51	8	---	---
Boron	ppm	ASTM D5185m		1	---	---
Barium	ppm	ASTM D5185m		4	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		92	---	---
Calcium	ppm	ASTM D5185m		3234	---	---
Phosphorus	ppm	ASTM D5185m		1086	---	---
Zinc	ppm	ASTM D5185m		1186	---	---
Sulfur	ppm	ASTM D5185m		4143	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.03	---	---
Visc @ 40°C	cSt	ASTM D445	59	52.0	---	---

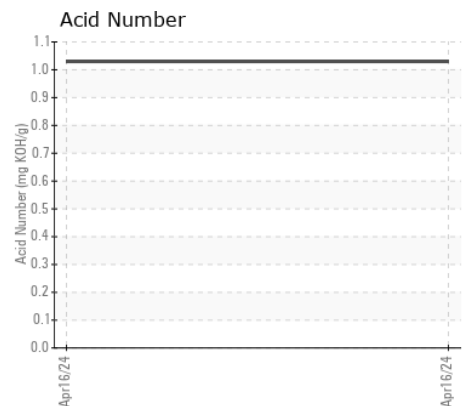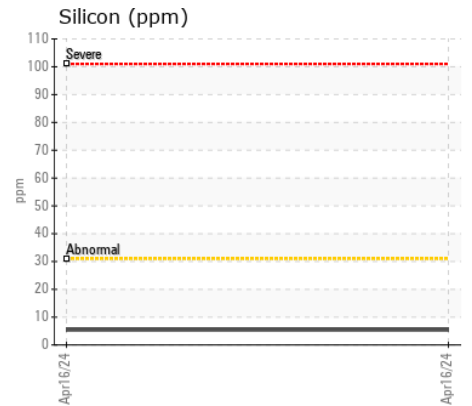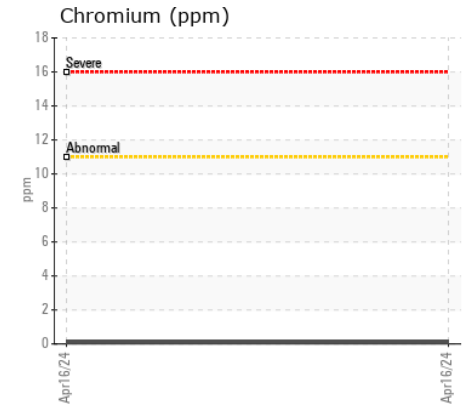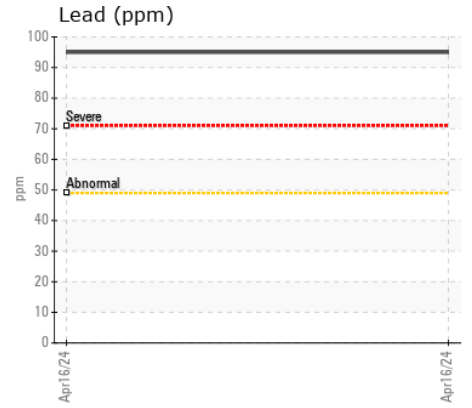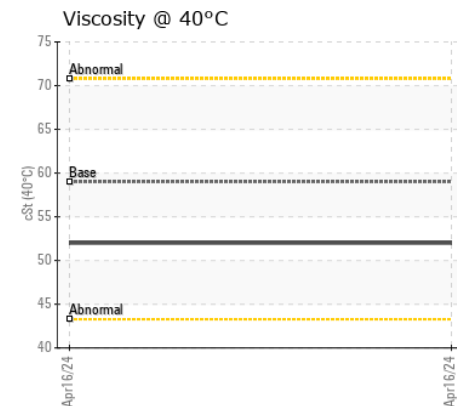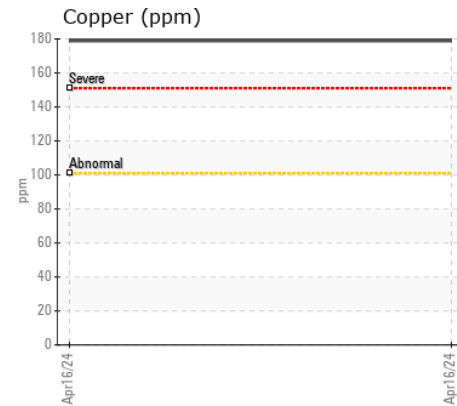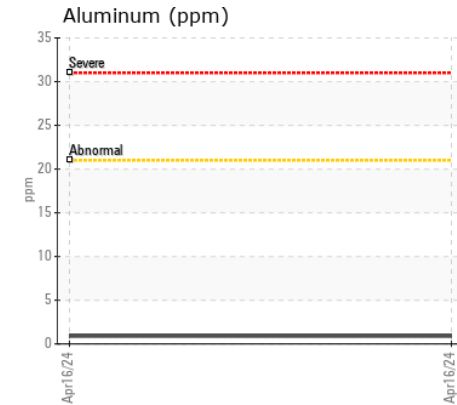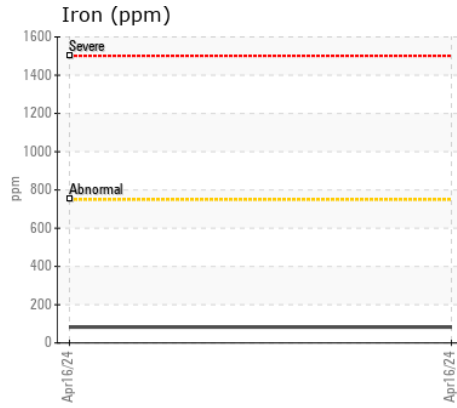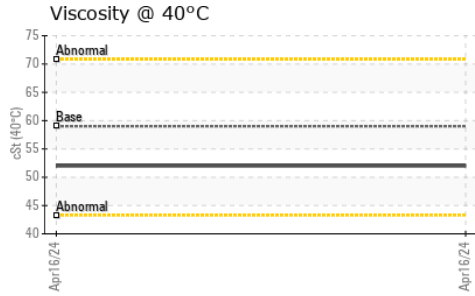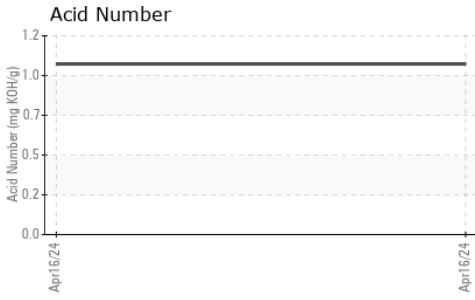

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DC0035674
Lab Number : 06152639
Unique Number : 10982717
Test Package : MOB 2
Received : 17 Apr 2024
Tested : 19 Apr 2024
Diagnosed : 22 Apr 2024 - Don Baldrige

COMER CONSTRUCTION
 2100 SLADE LANE
 FOREST HILL, MD
 US 21050
 Contact: DONALD FOX
 dfox@comerconstruction.com
 T: (443)269-1379
 F: (410)638-0289

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)