



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A45G 79 (S/N 342558)
Component
Bogie/Center Axle
Fluid
SHELL SPIRAX HD 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP06152673	VCP397352	---
Sample Date		Client Info		02 Apr 2024	20 Feb 2023	---
Machine Age	hrs	Client Info		0	10761	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Changed	---
Filter Changed		Client Info		N/A	Not Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	102	309	---
Chromium	ppm	ASTM D5185m	>20	<1	3	---
Nickel	ppm	ASTM D5185m	>10	<1	2	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>30	<1	1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	3	15	---
Tin	ppm	ASTM D5185m	>20	<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	6	---
Potassium	ppm	ASTM D5185m	>20	3	1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	6	---
Boron	ppm	ASTM D5185m	234	318	186	---
Barium	ppm	ASTM D5185m	0.1	0	<1	---
Molybdenum	ppm	ASTM D5185m	0	1	3	---
Manganese	ppm	ASTM D5185m		5	10	---
Magnesium	ppm	ASTM D5185m	0.0	2	2	---
Calcium	ppm	ASTM D5185m	0.4	101	199	---
Phosphorus	ppm	ASTM D5185m	864	1181	2054	---
Zinc	ppm	ASTM D5185m	0.6	28	94	---
Sulfur	ppm	ASTM D5185m	16893	22813	24442	---
Visc @ 40°C	cSt	ASTM D445	139	123	49.1	---

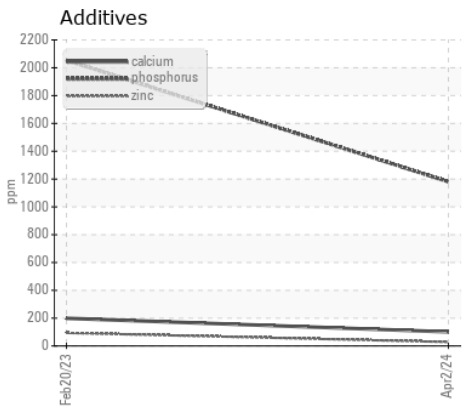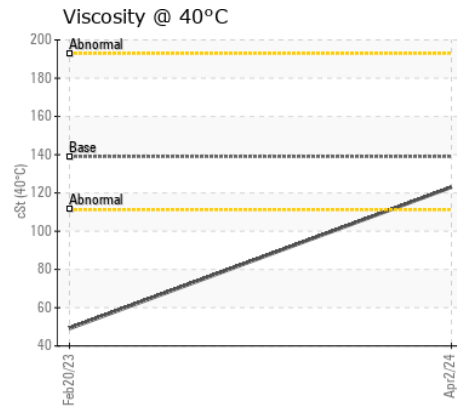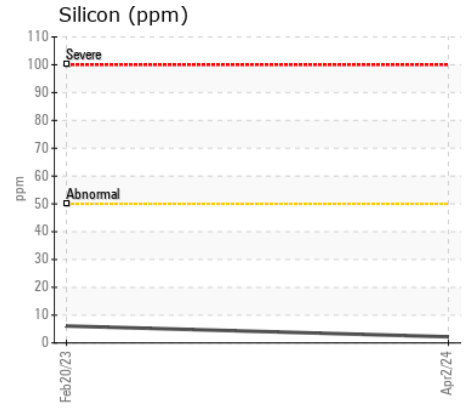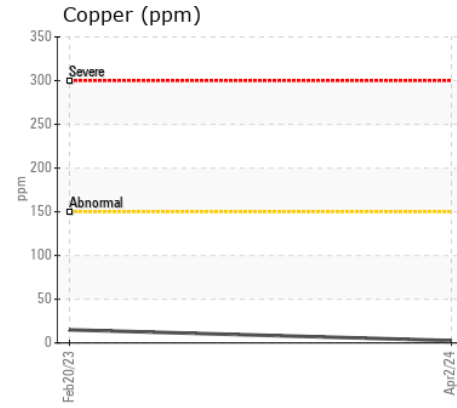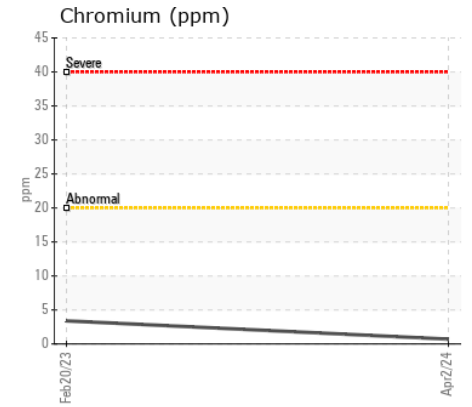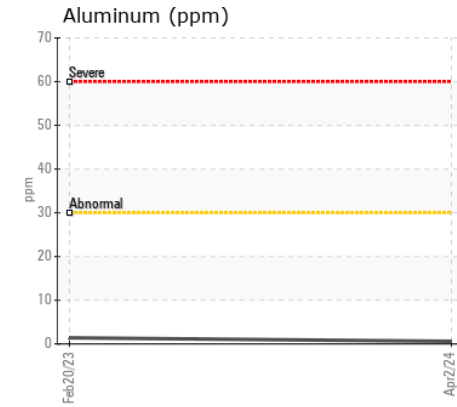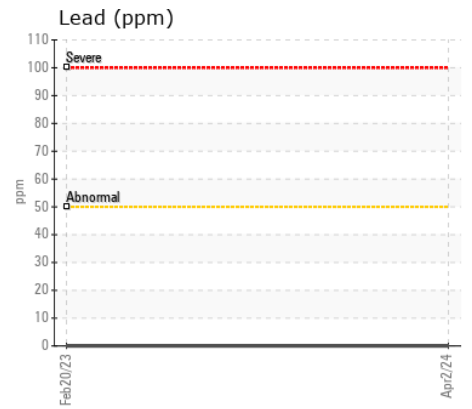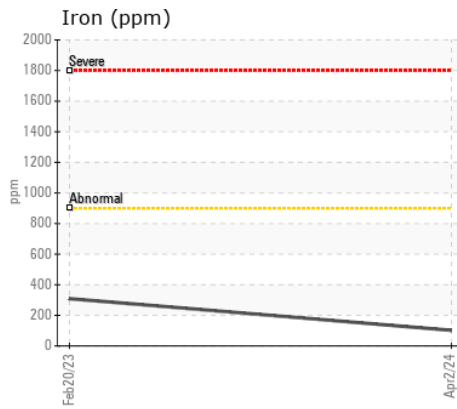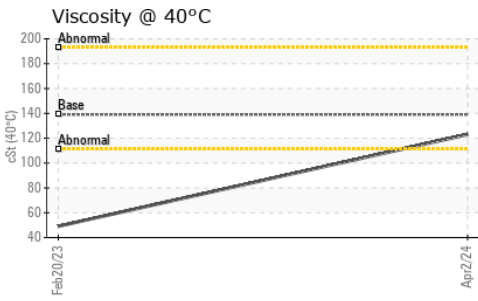

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP06152673

Lab Number : 06152673

Unique Number : 10982751

Test Package : MOB 1

Received : 17 Apr 2024

Tested : 18 Apr 2024

Diagnosed : 22 Apr 2024 - Sean Felton

J.M. HUBER

10322 HWY 53 E

MARBLE HILL, GA

US 30148

Contact: GEORGE GIBSON

george.gibson@huber.com

T: (770)893-7602

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)