



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L524 020079-659
Component
Front Right Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please note that this is a corrected copy for data entry updates.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP06152678	---	---
Sample Date		Client Info		02 Apr 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	309	---	---
Chromium	ppm	ASTM D5185m	>8	1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>5	2	---	---
Lead	ppm	ASTM D5185m	>5	0	---	---
Copper	ppm	ASTM D5185m	>50	<1	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	---	---
Potassium	ppm	ASTM D5185m	>20	5	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	3	---	---
Boron	ppm	ASTM D5185m	400	359	---	---
Barium	ppm	ASTM D5185m	200	<1	---	---
Molybdenum	ppm	ASTM D5185m	12	1	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	12	5	---	---
Calcium	ppm	ASTM D5185m	150	27	---	---
Phosphorus	ppm	ASTM D5185m	1650	2318	---	---
Zinc	ppm	ASTM D5185m	125	13	---	---
Sulfur	ppm	ASTM D5185m	22500	24654	---	---
Visc @ 40°C	cSt	ASTM D445	143	135	---	---

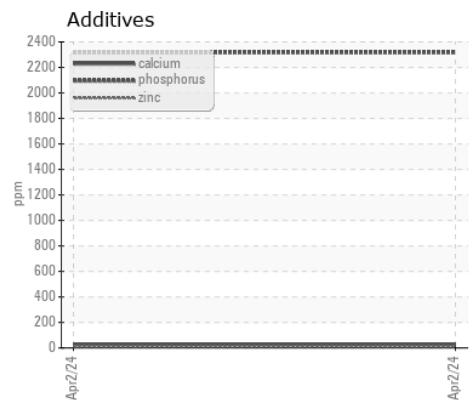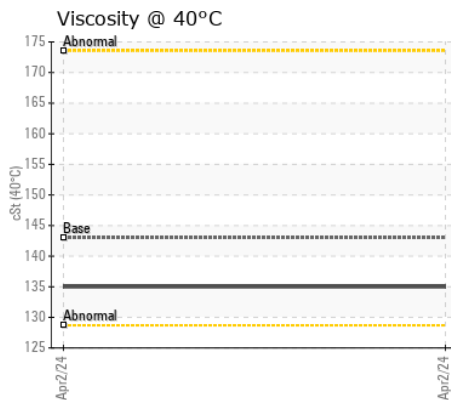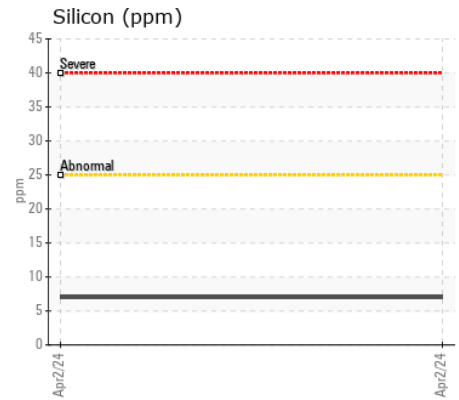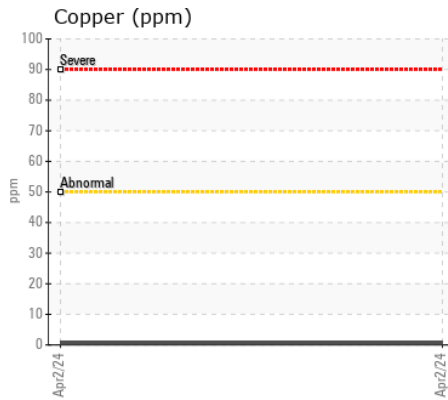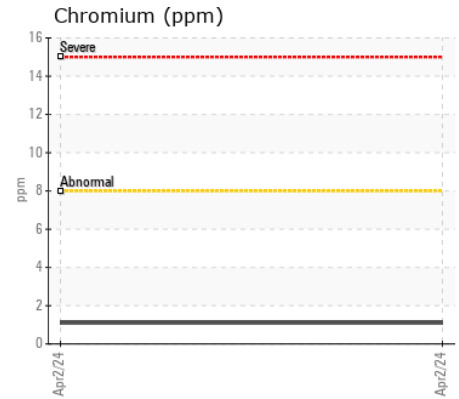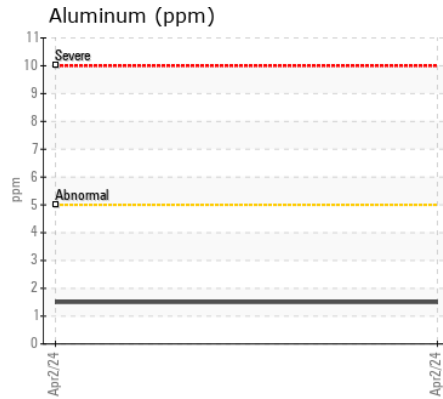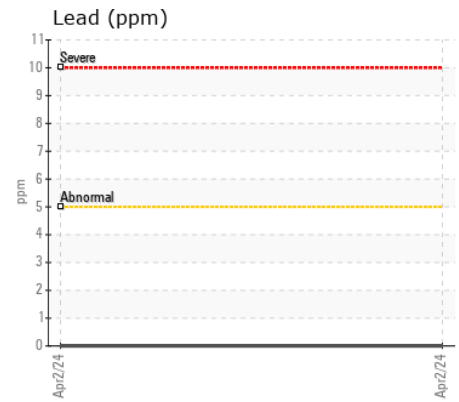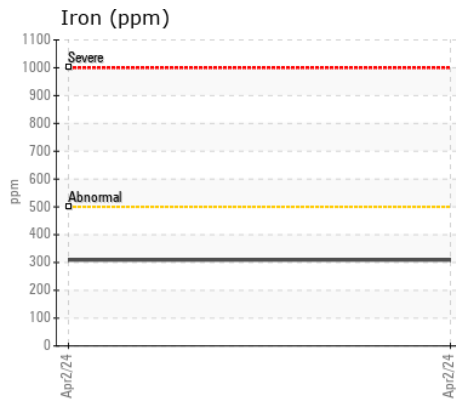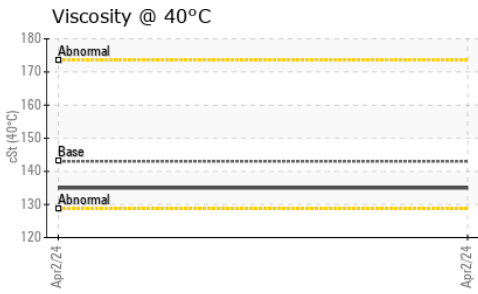

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : VCP06152678 Received : 17 Apr 2024
 Lab Number : 06152678 Tested : 18 Apr 2024
 Unique Number : 10982756 Diagnosed : 18 Apr 2024 - Doug Bogart
 Test Package : MOB 1

SIMS METAL MANAGEMENT
 2500 S. PAULINA
 CHICAGO, IL
 US 60608
 Contact: RYAN WISE
 ryan.wise@simsmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: