



LEAHY-WOLF
Lubricating specialists since 1946

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
GWYNETH ANNE
Component
Port Main Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW0008468	---	---
Sample Date		Client Info		28 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		1000	---	---
Filter Age	hrs	Client Info		1000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	9	---	---
Chromium	ppm	ASTM D5185m	>8	1	---	---
Nickel	ppm	ASTM D5185m	>2	1	---	---
Titanium	ppm	ASTM D5185m	>3	<1	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>15	1	---	---
Lead	ppm	ASTM D5185m	>18	2	---	---
Copper	ppm	ASTM D5185m	>80	1	---	---
Tin	ppm	ASTM D5185m	>14	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	6	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0.4	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>75	<1	---	---
Boron	ppm	ASTM D5185m		6	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		61	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		941	---	---
Calcium	ppm	ASTM D5185m		1081	---	---
Phosphorus	ppm	ASTM D5185m		1126	---	---
Zinc	ppm	ASTM D5185m		1227	---	---
Sulfur	ppm	ASTM D5185m		3553	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.2	---	---
Visc @ 100°C	cSt	ASTM D445		14.5	---	---

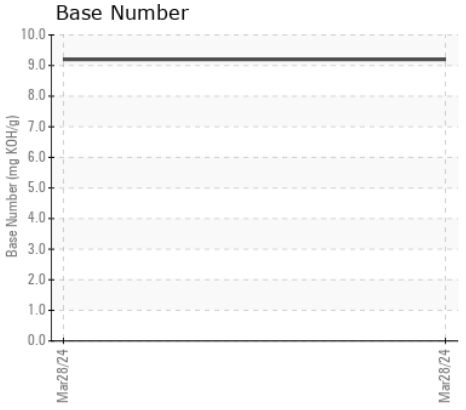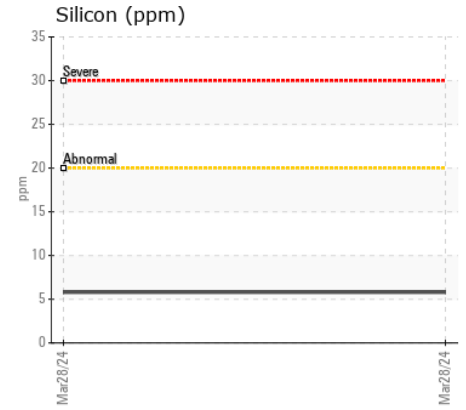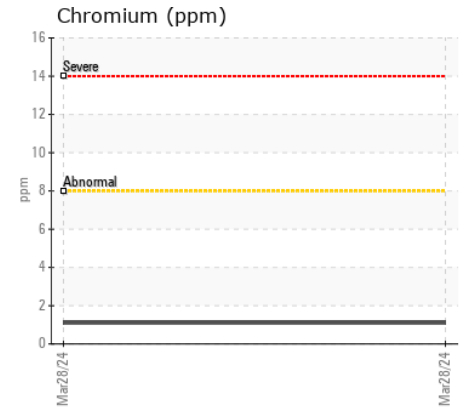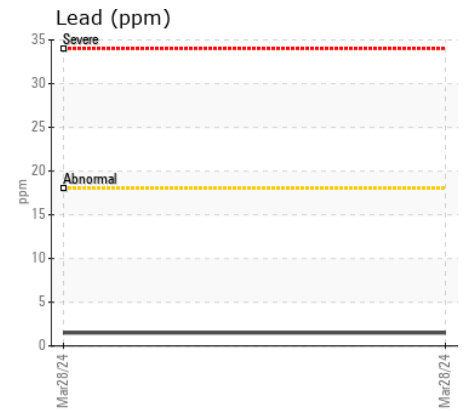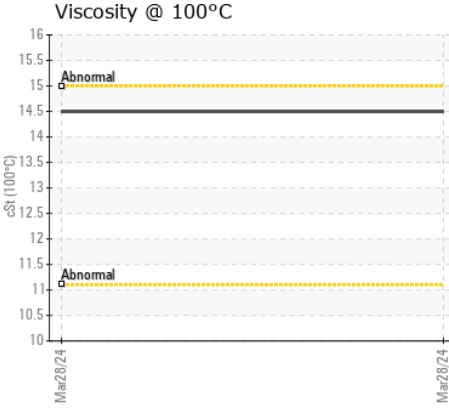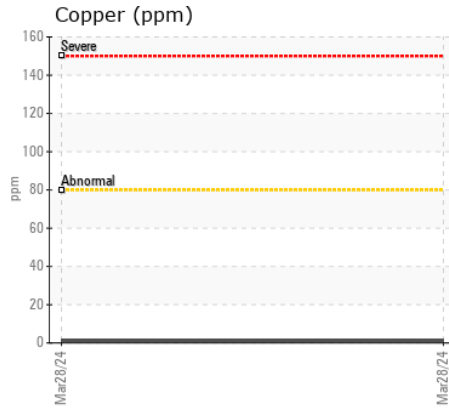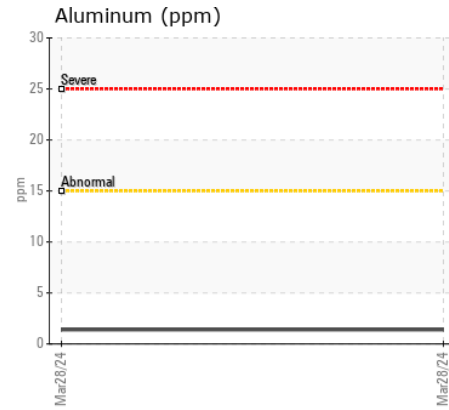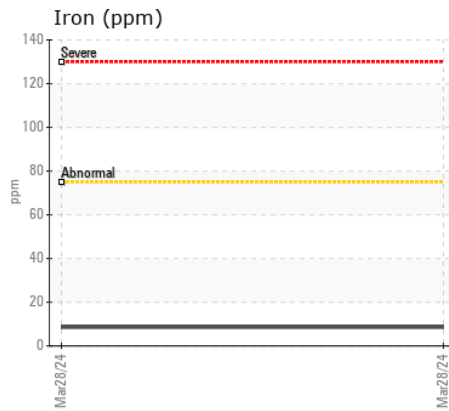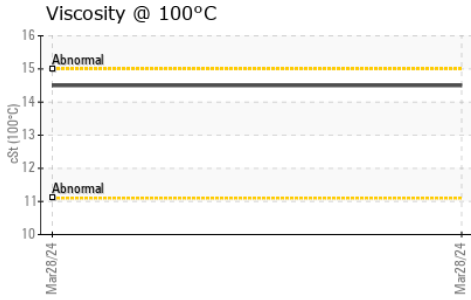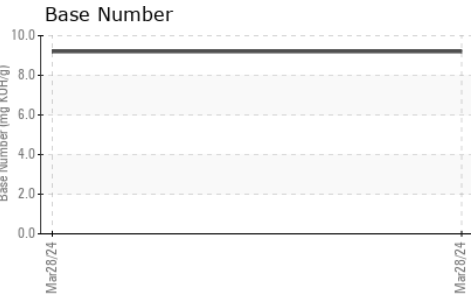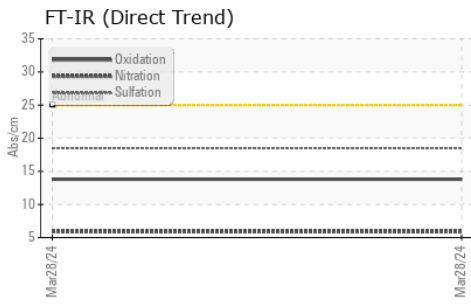

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : LW0008468
 Lab Number : 06152724
 Unique Number : 10982802
 Test Package : MOB 1 (Additional Tests: TBN)

Received : 18 Apr 2024
 Tested : 18 Apr 2024
 Diagnosed : 18 Apr 2024 - Wes Davis

MIDDLE RIVER MARINE
 18861 S 90TH AVE
 MOKENA, IL
 US 60448

Contact: JENNIFER DOROSZ
 jenniferdorosz@gomidriver.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: