



| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
(E031HW)

Machine Id
2824

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (40 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | GFL0098894 | GFL0099019 | GFL0098875 |
| Sample Date | | Client Info | | 09 Apr 2024 | 01 Apr 2024 | 12 Mar 2024 |
| Machine Age | hrs | Client Info | | 9074 | 9032 | 8776 |
| Oil Age | hrs | Client Info | | 8776 | 8776 | 8776 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | Changed | Changed | Changed |
| Sample Status | | | | NORMAL | NORMAL | NORMAL |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >165 | 5 | 11 | 8 |
| Chromium | ppm | ASTM D5185m | >5 | <1 | 1 | 0 |
| Nickel | ppm | ASTM D5185m | >4 | 1 | 1 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | <1 | <1 | <1 |
| Silver | ppm | ASTM D5185m | >2 | <1 | <1 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 1 | 1 | 2 |
| Lead | ppm | ASTM D5185m | >150 | 1 | 1 | <1 |
| Copper | ppm | ASTM D5185m | >90 | 1 | 2 | <1 |
| Tin | ppm | ASTM D5185m | >5 | 1 | 1 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | <1 | <1 |
| White Metal | scalar | *Visual | NONE | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION








There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >35 | 4 | 4 | 3 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 4 | 3 |
| Fuel | | WC Method | >3.0 | <1.0 | <1.0 | <1.0 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | | WC Method | | NEG | NEG | NEG |
| Soot % | % | *ASTM D7844 | >7.5 | 0.1 | 0.2 | 0.1 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 4.9 | 6.8 | 6.2 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 17.2 | 18.4 | 17.8 |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|-------------|------|------|
| Sodium | ppm | ASTM D5185m | | 2 | 4 | 3 |
| Boron | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 55 | 55 | 56 |
| Manganese | ppm | ASTM D5185m | 0 | 1 | 1 | <1 |
| Magnesium | ppm | ASTM D5185m | 1010 | 847 | 851 | 955 |
| Calcium | ppm | ASTM D5185m | 1070 | 1051 | 1061 | 1111 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 1051 | 1063 | 1026 |
| Zinc | ppm | ASTM D5185m | 1270 | 1129 | 1159 | 1274 |
| Sulfur | ppm | ASTM D5185m | 2060 | 3450 | 3388 | 3817 |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 12.8 | 14.1 | 13.8 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 8.5 | 7.9 | 7.9 |
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 14.1 | 13.6 | 13.8 |

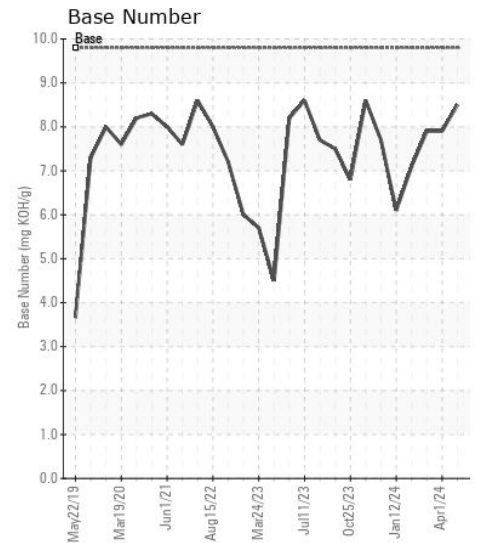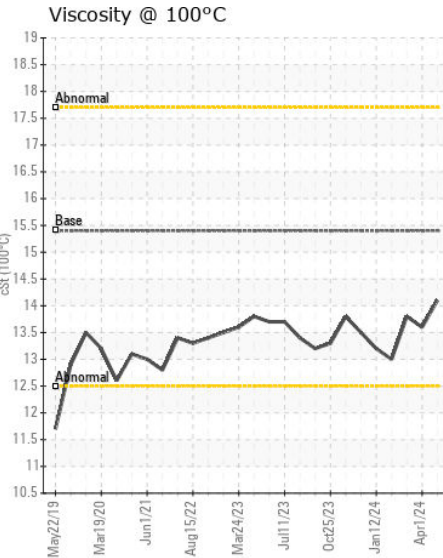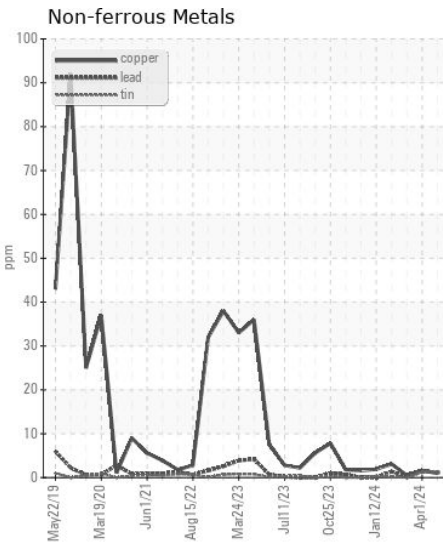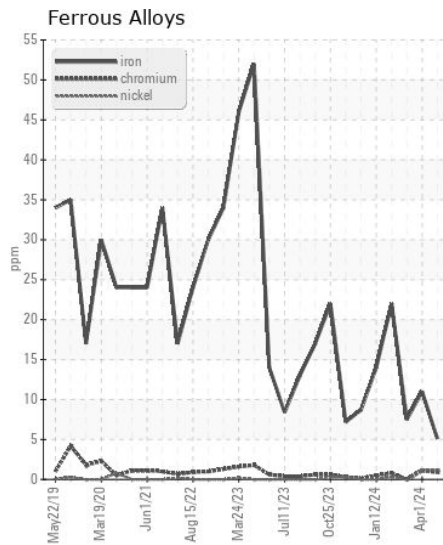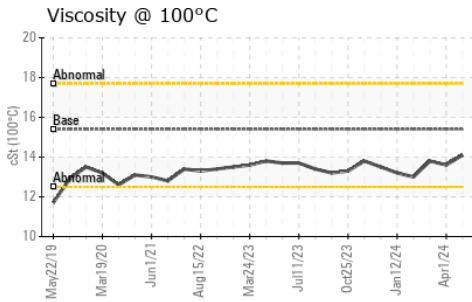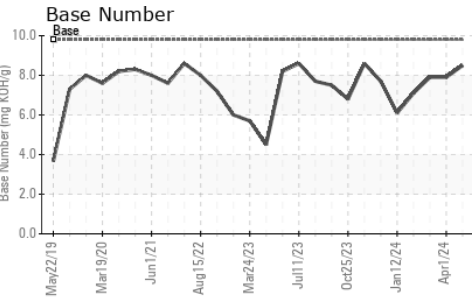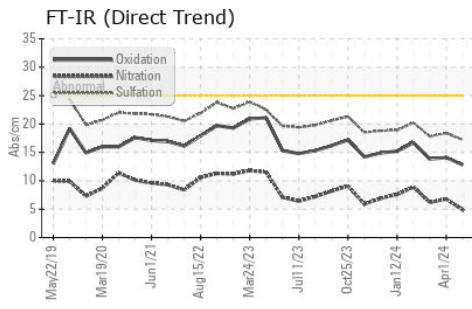

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0098894
Lab Number : 06152736
Unique Number : 10982814
Test Package : FLEET

Received : 18 Apr 2024
Tested : 18 Apr 2024
Diagnosed : 18 Apr 2024 - Wes Davis

GFL Environmental - 084 - Clarksville
 699 Jack Miller Boulevard
 Clarksville, TN
 US 37042

Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com

T: (931)552-7276
 F: (931)572-9674

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)