



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(43334HA)

Machine Id

826020-1021

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- LTR)



RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL011880	GFL0108271	GFL0108316
Sample Date		Client Info		16 Apr 2024	05 Feb 2024	29 Jan 2024
Machine Age	hrs	Client Info		21680	21342	21310
Oil Age	hrs	Client Info		338	13090	13363
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	28	31	31
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>5	2	<1	<1
Titanium	ppm	ASTM D5185m	>2	<1	0	<1
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>20	4	2	2
Lead	ppm	ASTM D5185m	>40	1	0	0
Copper	ppm	ASTM D5185m	>330	1	<1	<1
Tin	ppm	ASTM D5185m	>15	1	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	7	4	4
Potassium	ppm	ASTM D5185m	>20	2	<1	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.4	2	1.8
Nitration	Abs/cm	*ASTM D7624	>20	6.5	9.3	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.5	22.7	19.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	<1	0
Boron	ppm	ASTM D5185m	0	27	13	10
Barium	ppm	ASTM D5185m	0	0	0	<1
Molybdenum	ppm	ASTM D5185m	60	82	57	63
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	1283	866	883
Calcium	ppm	ASTM D5185m	1070	1584	1005	1130
Phosphorus	ppm	ASTM D5185m	1150	1583	1006	971
Zinc	ppm	ASTM D5185m	1270	1743	1209	1223
Sulfur	ppm	ASTM D5185m	2060	5221	2895	3020
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.8	14.3	12.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.0	9.2	4.5
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.9	14.2

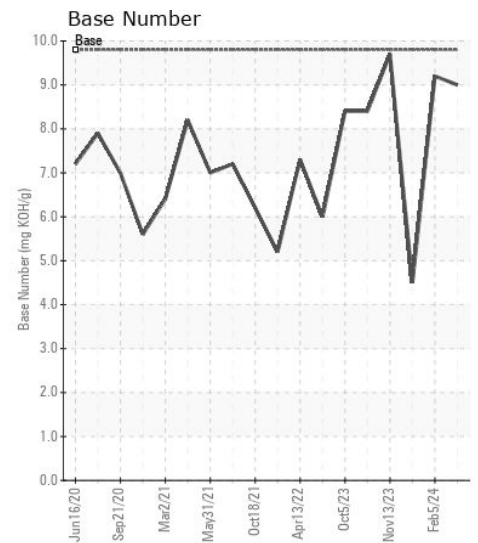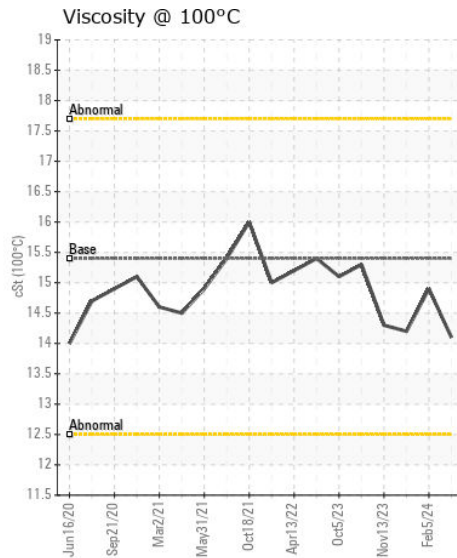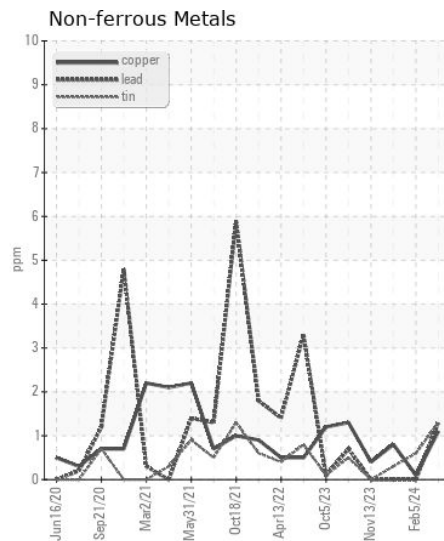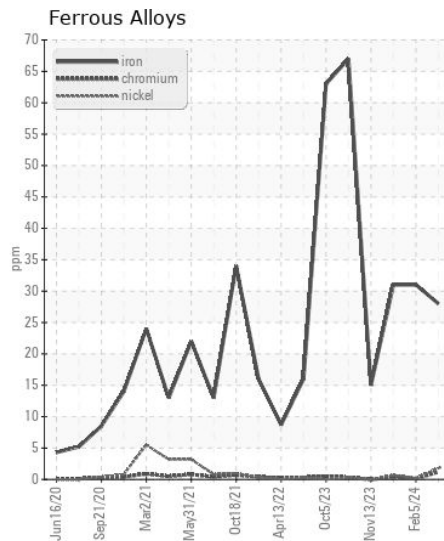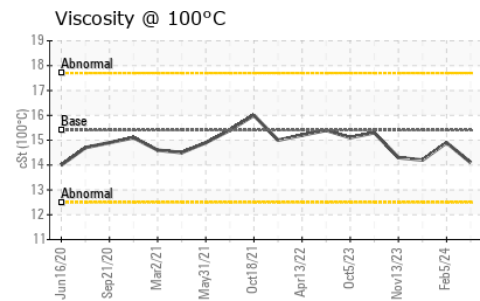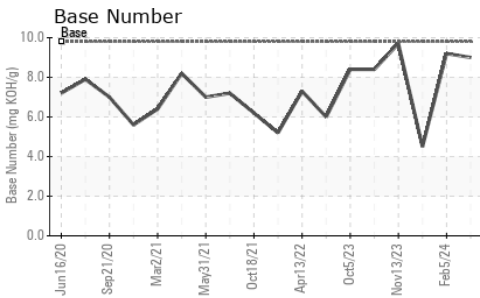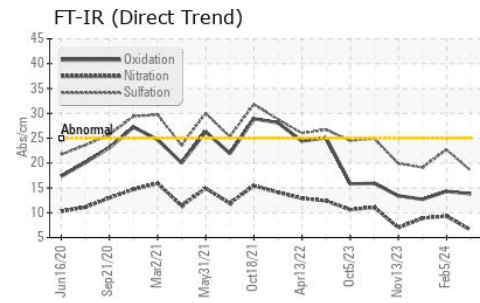

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0111880 **Received** : 18 Apr 2024
Lab Number : 06152844 **Tested** : 19 Apr 2024
Unique Number : 10982922 **Diagnosed** : 22 Apr 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)