



WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id  
**JOHN DEERE 324L 1LU324LHCZB068261**  
 Component  
**Hydraulic System**  
 Fluid  
**JOHN DEERE HYDRAU (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0209078	JR0167744	---
Sample Date		Client Info		16 Apr 2024	27 Apr 2023	---
Machine Age	hrs	Client Info		1311	543	---
Oil Age	hrs	Client Info		1311	543	---
Filter Age	hrs	Client Info		0	543	---
Oil Changed		Client Info		Not Chngd	Not Chngd	---
Filter Changed		Client Info		Not Chngd	Changed	---
Sample Status				ATTENTION	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	4	4	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	1	---
Lead	ppm	ASTM D5185m	>10	<1	0	---
Copper	ppm	ASTM D5185m	>75	4	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

### CONTAMINATION











There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	5	1	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	5093	2205	---
Particles >6µm		ASTM D7647	>1300	500	444	---
Particles >14µm		ASTM D7647	>160	28	46	---
Particles >21µm		ASTM D7647	>40	8	15	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/16/12	18/16/13	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	---
Boron	ppm	ASTM D5185m		1	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		6	4	---
Calcium	ppm	ASTM D5185m	87	1009	1278	---
Phosphorus	ppm	ASTM D5185m	727	550	523	---
Zinc	ppm	ASTM D5185m	900	629	605	---
Sulfur	ppm	ASTM D5185m	1500	3415	3488	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.90	1.22	---
Visc @ 40°C	cSt	ASTM D445	65	43.1	43.7	---

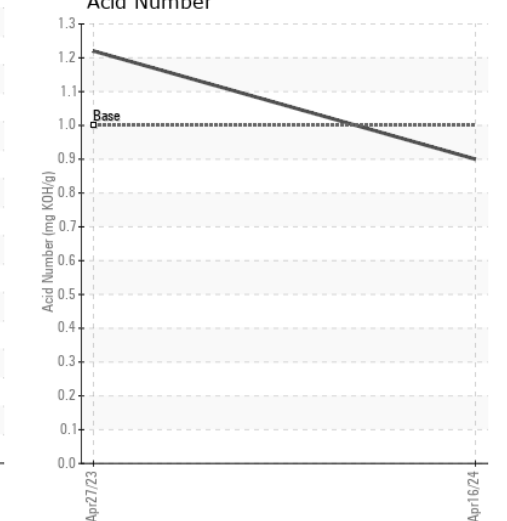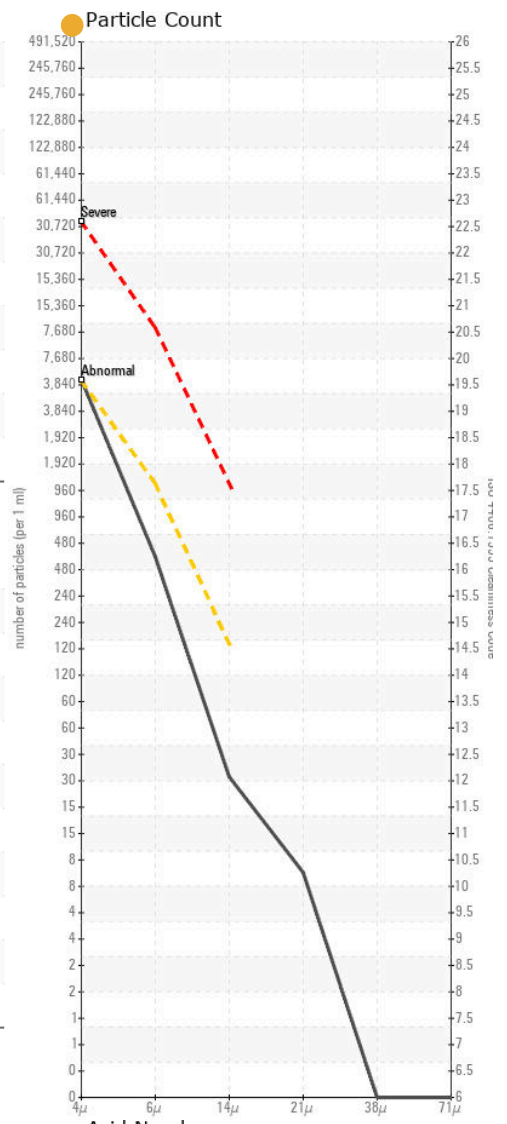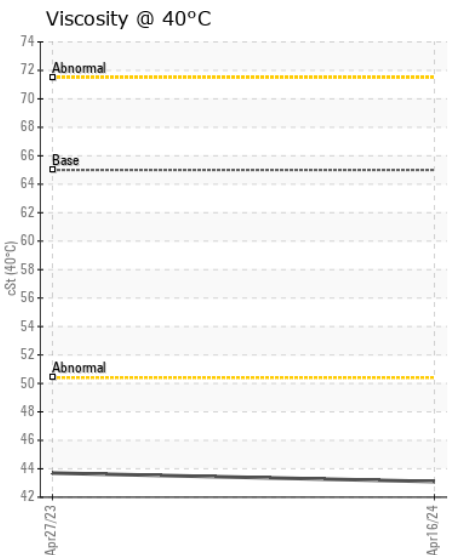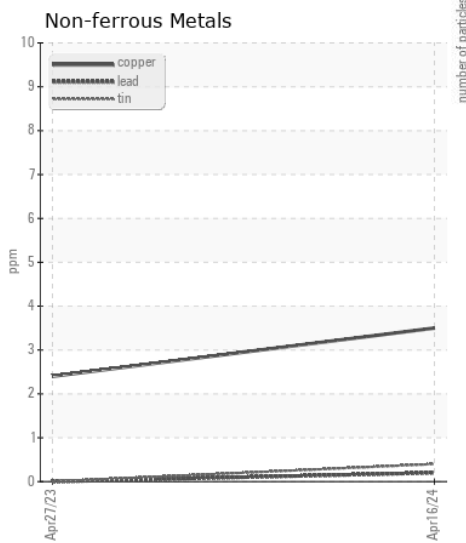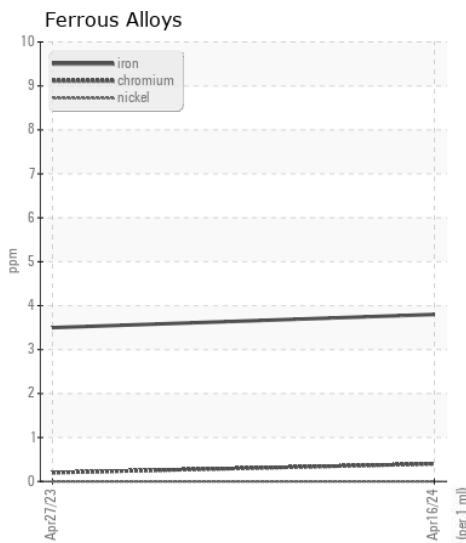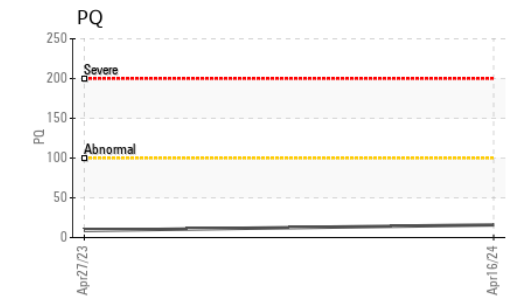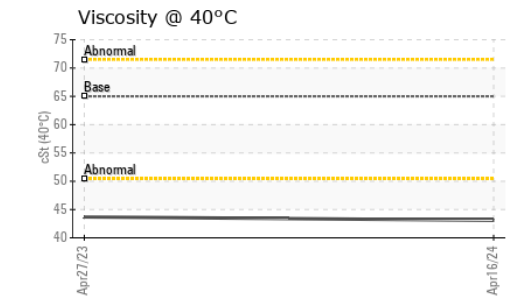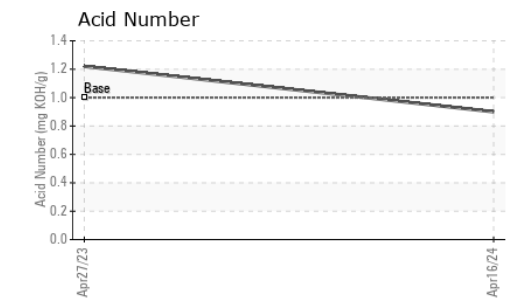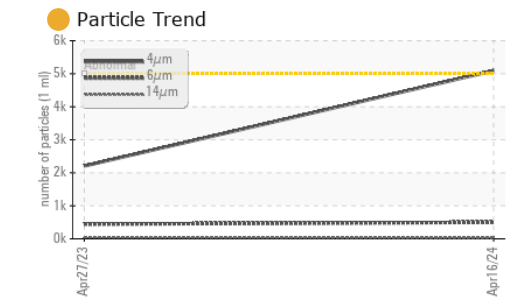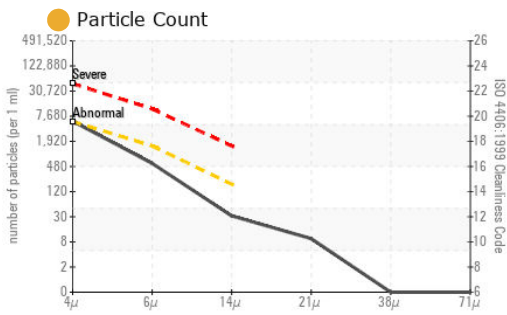

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0209078 **Received** : 18 Apr 2024  
**Lab Number** : 06152988 **Tested** : 19 Apr 2024  
**Unique Number** : 10983066 **Diagnosed** : 22 Apr 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

T: (919)614-2260  
 F: (919)779-5432