



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [RO#147458]
Machine Id
JOHN DEERE 550K 1T0550KKTNF432092
Component
Hydrostatic
Fluid
JOHN DEERE HYDRAU (26 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048922	LEC0037638	---
Sample Date		Client Info		16 Apr 2024	06 Jun 2023	---
Machine Age	hrs	Client Info		1100	583	---
Oil Age	hrs	Client Info		1100	583	---
Filter Age	hrs	Client Info		1100	583	---
Oil Changed		Client Info		Not Chngd	Not Chngd	---
Filter Changed		Client Info		Not Chngd	Not Chngd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>31	6	6	---
Chromium	ppm	ASTM D5185m	>9	0	<1	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	1	0	---
Lead	ppm	ASTM D5185m	>11	<1	0	---
Copper	ppm	ASTM D5185m	>41	6	4	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	2	1	---
Potassium	ppm	ASTM D5185m	>20	4	2	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>20000	7491	1610	---
Particles >6µm		ASTM D7647	>5000	178	166	---
Particles >14µm		ASTM D7647	>640	8	13	---
Particles >21µm		ASTM D7647	>160	2	4	---
Particles >38µm		ASTM D7647	>40	0	0	---
Particles >71µm		ASTM D7647	>10	0	0	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/15/10	18/15/11	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	2	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		2	0	---
Calcium	ppm	ASTM D5185m	87	87	91	---
Phosphorus	ppm	ASTM D5185m	727	695	713	---
Zinc	ppm	ASTM D5185m	900	866	930	---
Sulfur	ppm	ASTM D5185m	1500	1951	2106	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.23	0.77	---
Visc @ 40°C	cSt	ASTM D445	65	56.1	57.1	---

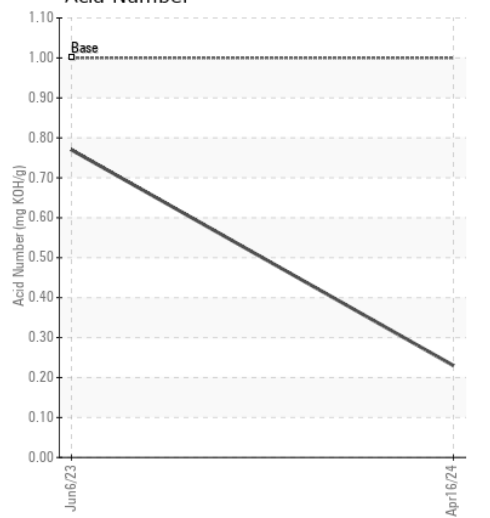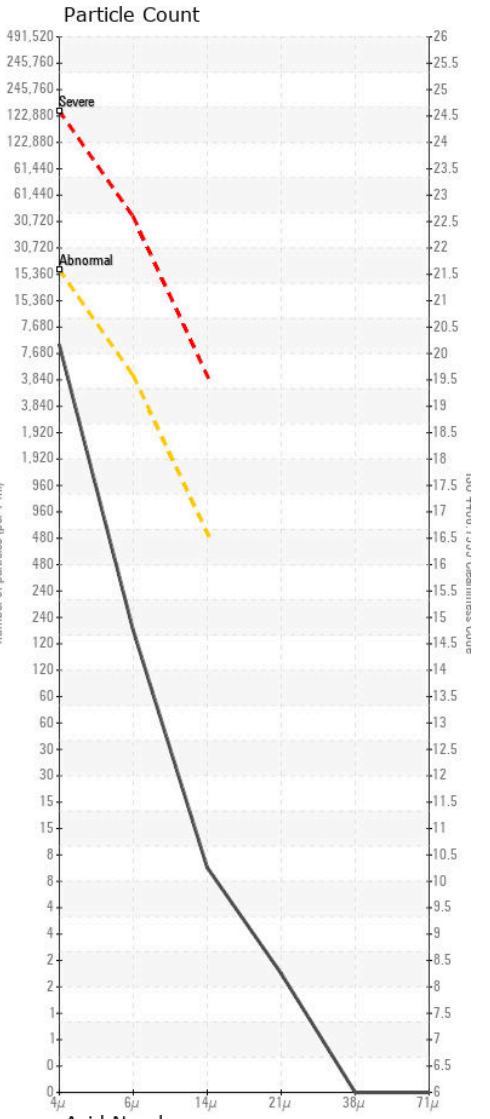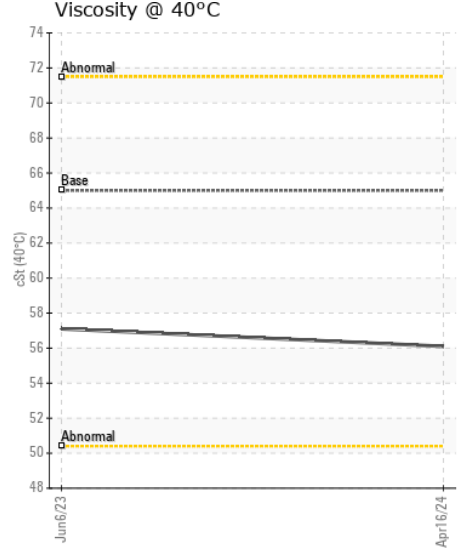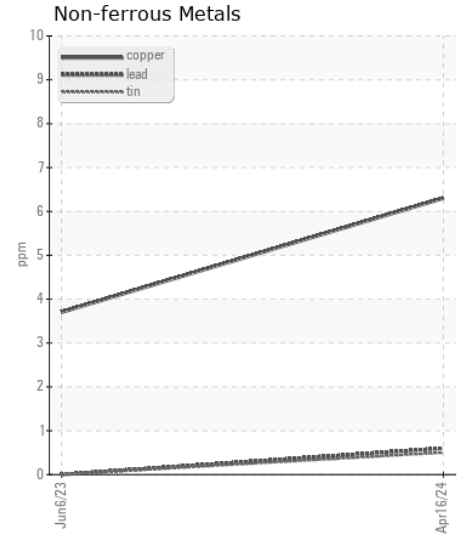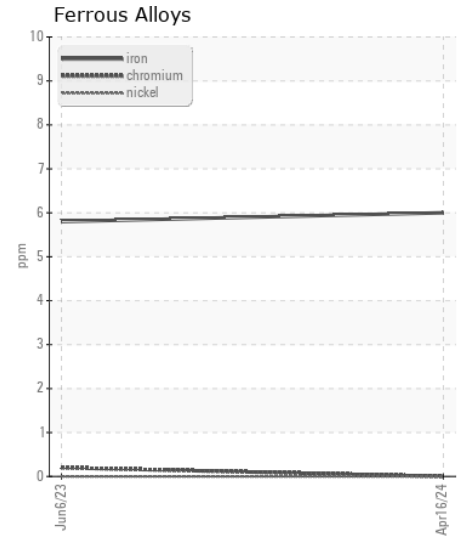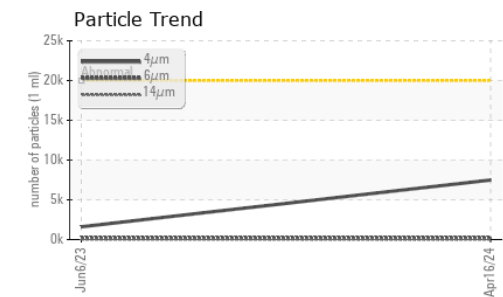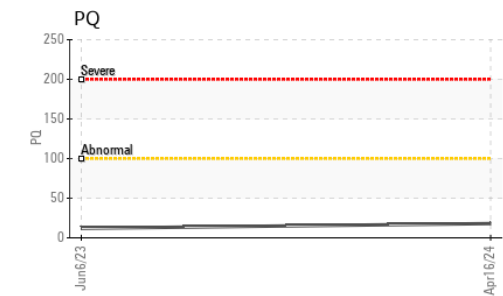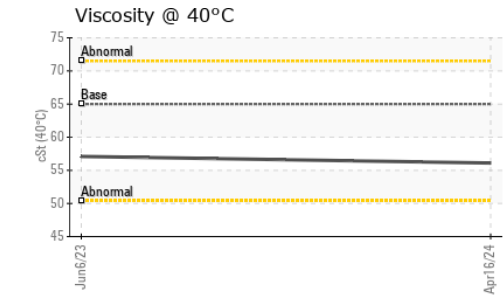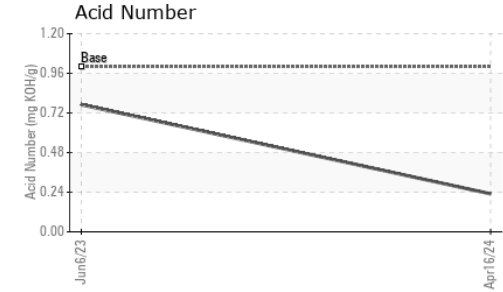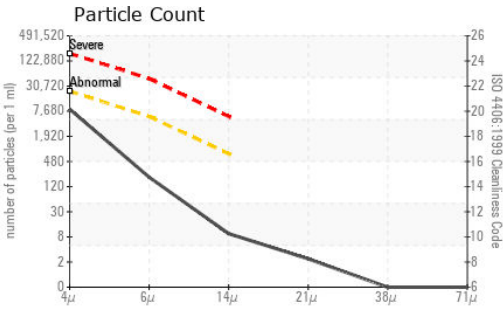

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048922 **Received** : 18 Apr 2024
Lab Number : 06152995 **Tested** : 19 Apr 2024
Unique Number : 10983073 **Diagnosed** : 22 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ, PrtCount)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com
 T:
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)