



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area  
**[473401 ALTER BARTONV]**  
 Machine Id  
**SENNEBOGEN 830 830.0.3516**  
 Component  
**Hydraulic System**  
 Fluid  
**VOLVO/SHELL ISO 46 (--- GAL)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP434750	---	---
Sample Date		Client Info		12 Apr 2024	---	---
Machine Age	hrs	Client Info		2053	---	---
Oil Age	hrs	Client Info		2000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ATTENTION	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	6	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>10	0	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.


Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1968	---	---
Particles >6µm		ASTM D7647	>1300	356	---	---
Particles >14µm		ASTM D7647	>160	29	---	---
Particles >21µm		ASTM D7647	>40	10	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

### FLUID CONDITION


The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		4	---	---
Calcium	ppm	ASTM D5185m		1041	---	---
Phosphorus	ppm	ASTM D5185m		541	---	---
Zinc	ppm	ASTM D5185m		657	---	---
Sulfur	ppm	ASTM D5185m		4100	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.02	---	---
Visc @ 40°C	cSt	ASTM D445		36.5	---	---

● Viscosity @ 40°C

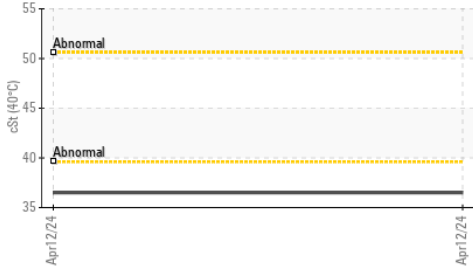


Particle Count

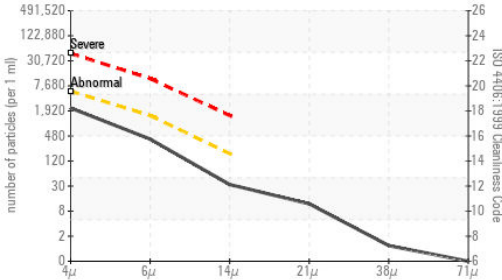


Acid Number




Particle Trend

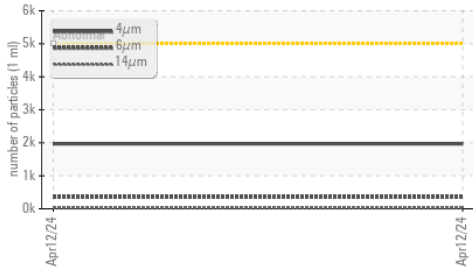


Ferrous Alloys

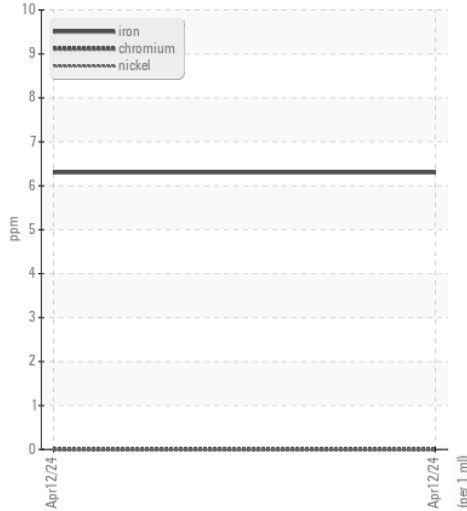



Non-ferrous Metals

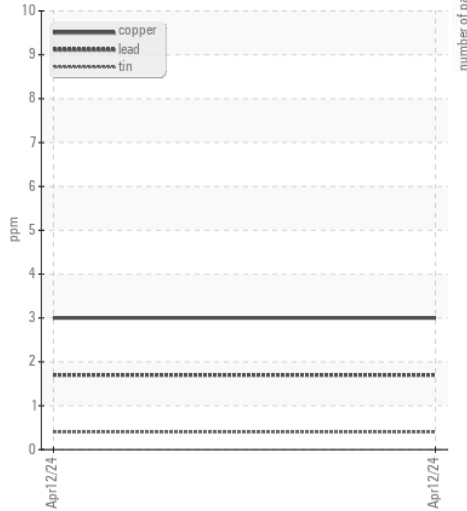

Particle Count

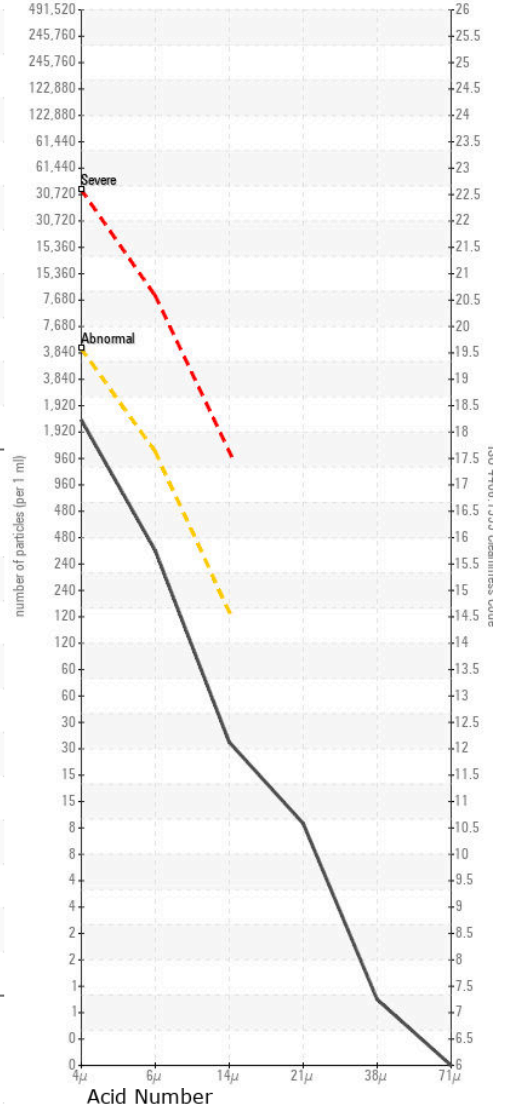

● Viscosity @ 40°C

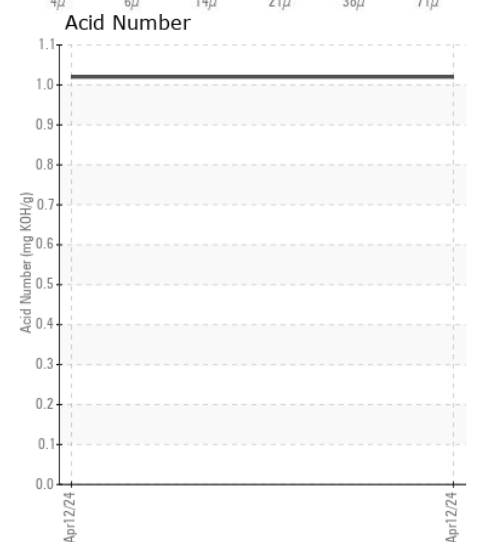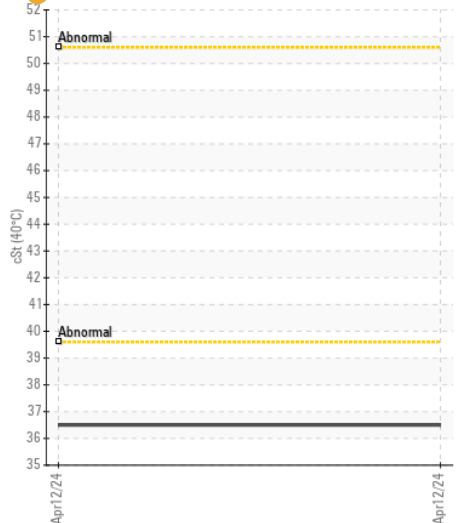

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP434750

Lab Number : 06153009

Unique Number : 10983087

Test Package : MOB 2

Received : 18 Apr 2024

Tested : 24 Apr 2024

Diagnosed : 24 Apr 2024 - Jonathan Hester

ALTA EQUIPMENT COMPANY

1035 WYLIE DRIVE

BLOOMINGTON, IL

US 61705

Contact: JUSTIN PERRY

justin.perry@altg.com

T: (309)533-9285

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)