



OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | NORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Area
PCL
 Machine Id
JCB 512-56 04F489 (S/N 3267681)
 Component
Hydraulic System
 Fluid
JCB (12 GAL)

RECOMMENDATION

We recommend you service the filters on this component. We recommend an early resample to monitor this condition.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | JCB005409 | --- | --- |
| Sample Date | | Client Info | | 15 Apr 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 999 | --- | --- |
| Oil Age | hrs | Client Info | | 500 | --- | --- |
| Filter Age | hrs | Client Info | | 500 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Lead | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >75 | <1 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION










There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

| | | | | | | |
|------------------|--------|--------------|-----------|-------------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Particles >4µm | | ASTM D7647 | >5000 | ▲ 12278 | --- | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 1240 | --- | --- |
| Particles >14µm | | ASTM D7647 | >160 | 48 | --- | --- |
| Particles >21µm | | ASTM D7647 | >40 | 12 | --- | --- |
| Particles >38µm | | ASTM D7647 | >10 | 1 | --- | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | ▲ 21/17/13 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | LIGHT | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

| | | | | | | |
|------------------|----------|-------------|--|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | | 0 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | <1 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 46 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 296 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 377 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3198 | --- | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.43 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 40.9 | --- | --- |

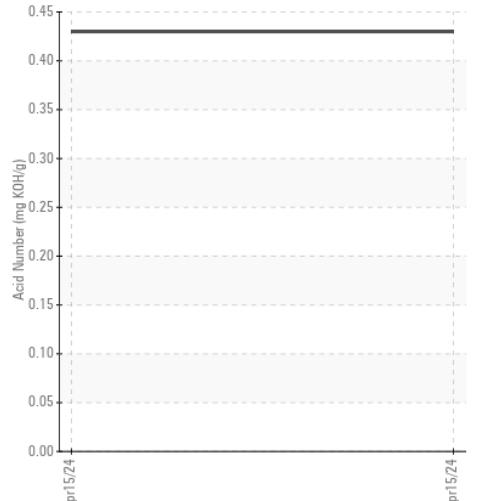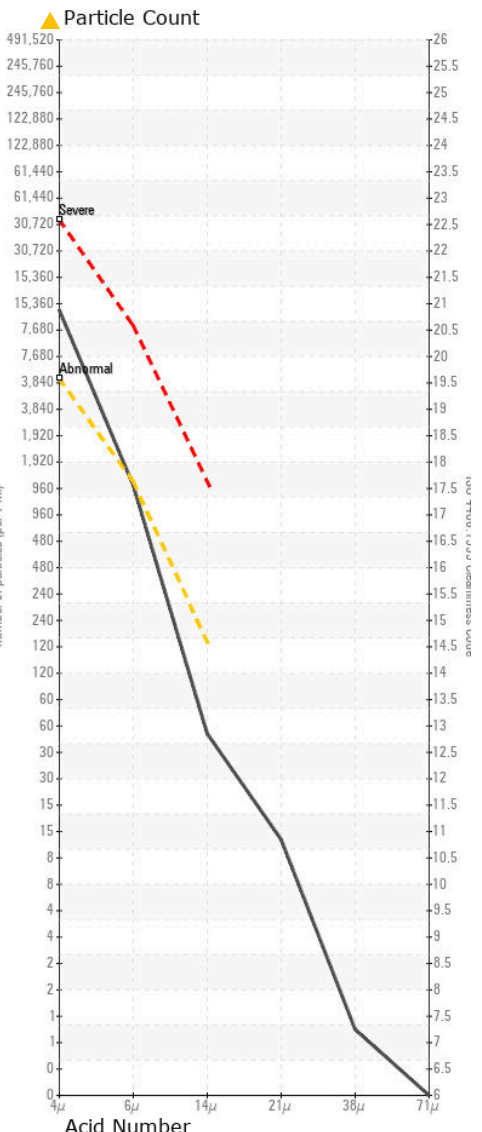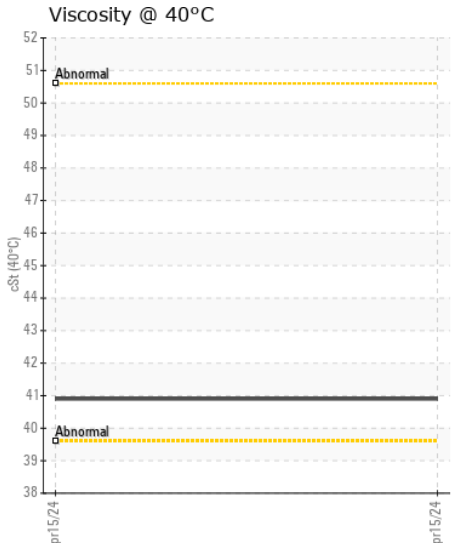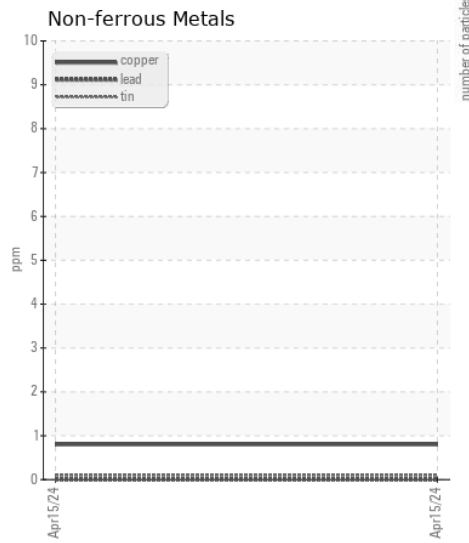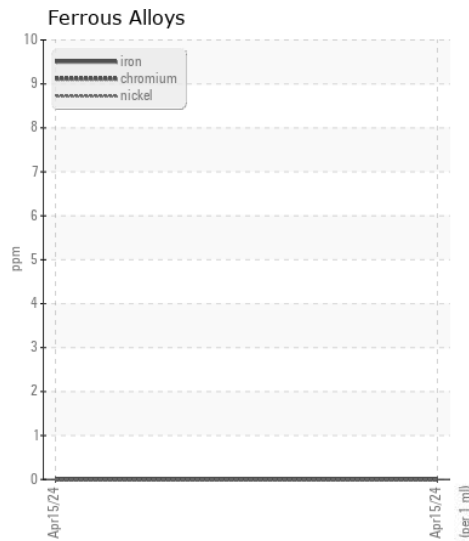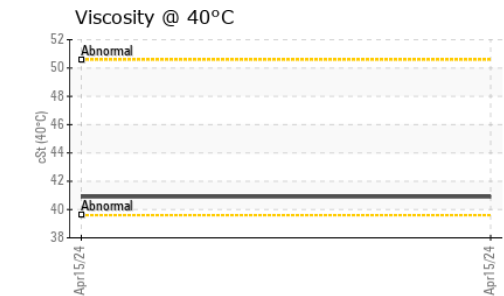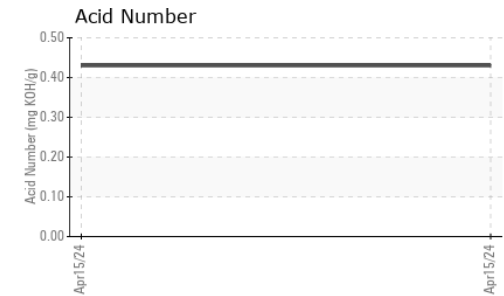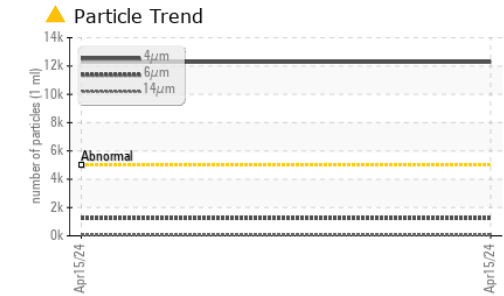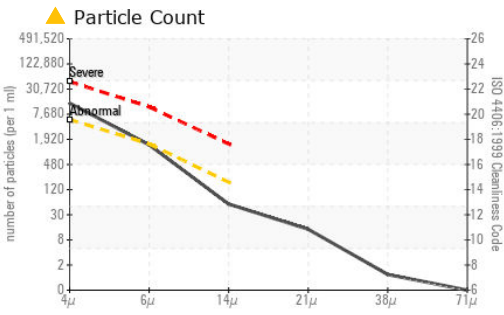

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : JCB005409
 Lab Number : 06153030
 Unique Number : 10983108
 Test Package : MOB 2

Received : 18 Apr 2024
 Tested : 19 Apr 2024
 Diagnosed : 19 Apr 2024 - Wes Davis

JCB OF AUSTIN - ENERCO LLC - MANOR
 12916 EAST US HWY 290
 MANOR, TX
 US 78653
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: