



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
ALL ADVANTAGE [152546]
 Machine Id
S330655 - PREMIER TOOLING
 Component
Compressor

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		UCH06153222	UCH05957719	---
Sample Date		Client Info		01 Apr 2024	28 Aug 2023	---
Machine Age	hrs	Client Info		36724	35924	---
Oil Age	hrs	Client Info		2250	1450	---
Filter Age	hrs	Client Info		2250	1450	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	4	12	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m		0	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	7	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>50	<1	1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>25	0	1	---
Potassium	ppm	ASTM D5185m	>20	2	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		16	4	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		0	0	---
Calcium	ppm	ASTM D5185m		0	<1	---
Phosphorus	ppm	ASTM D5185m		176	178	---
Zinc	ppm	ASTM D5185m		0	<1	---
Sulfur	ppm	ASTM D5185m		998	820	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.42	0.48	---
Visc @ 40°C	cSt	ASTM D445		45.1	45.3	---

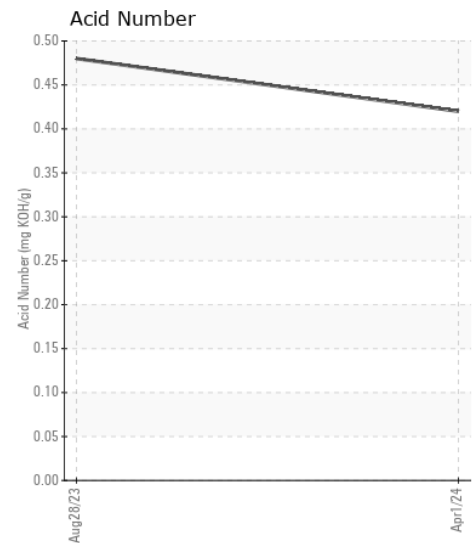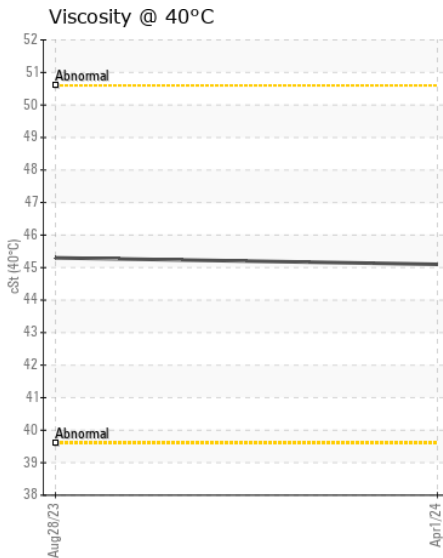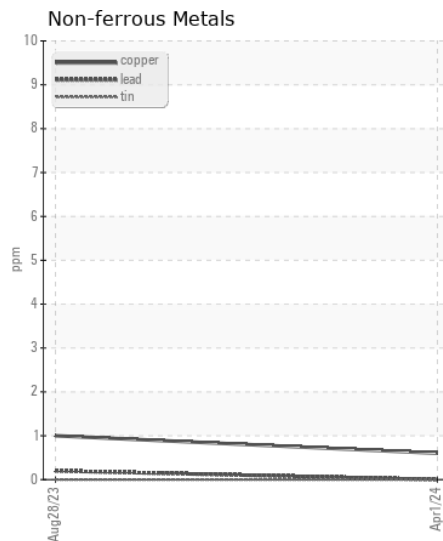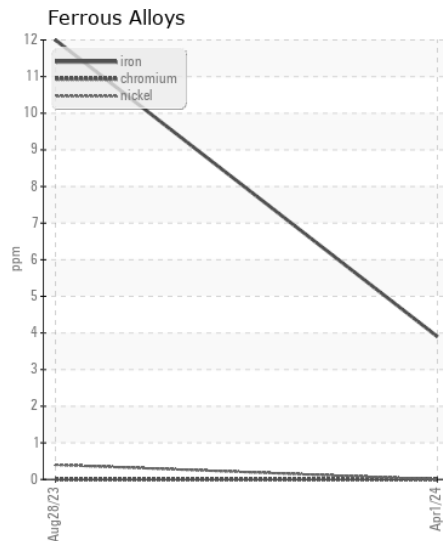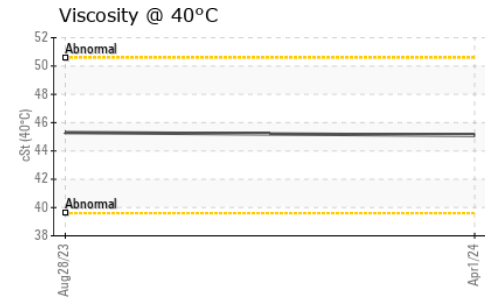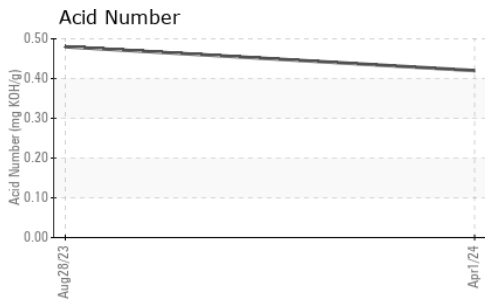

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : UCH06153222

Lab Number : 06153222

Unique Number : 10983300

Test Package : IND 2

Received : 18 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 22 Apr 2024 - Don Baldrige

A-L-L EQUIPMENT INC

204 38TH ST

MOLINE, IL

US 61265

Contact: KEVIN DESPOT

kevind@a-l-equipment.com

T: (815)877-7000

F: (309)762-9950

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)