



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SOUTH HOLLAND
Machine Id
JLG 600S PL9381 (S/N 0300299385)
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL 10W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		HPL0003891	---	---
Sample Date		Client Info		16 Apr 2024	---	---
Machine Age	hrs	Client Info		288	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	5	---	---
Lead	ppm	ASTM D5185m	>40	<1	---	---
Copper	ppm	ASTM D5185m	>330	8	---	---
Tin	ppm	ASTM D5185m	>15	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	18	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	12.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m	250	54	---	---
Barium	ppm	ASTM D5185m	10	13	---	---
Molybdenum	ppm	ASTM D5185m	100	114	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	755	---	---
Calcium	ppm	ASTM D5185m	3000	1497	---	---
Phosphorus	ppm	ASTM D5185m	1150	795	---	---
Zinc	ppm	ASTM D5185m	1350	904	---	---
Sulfur	ppm	ASTM D5185m	4250	3982	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.5	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.59	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.5	---	---

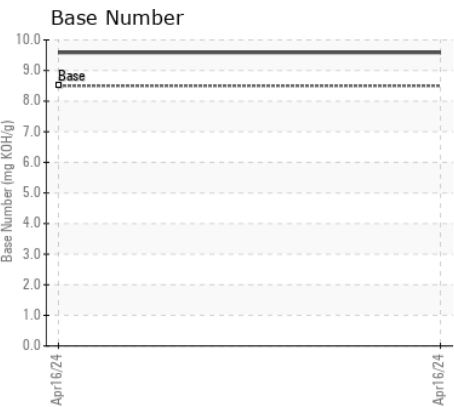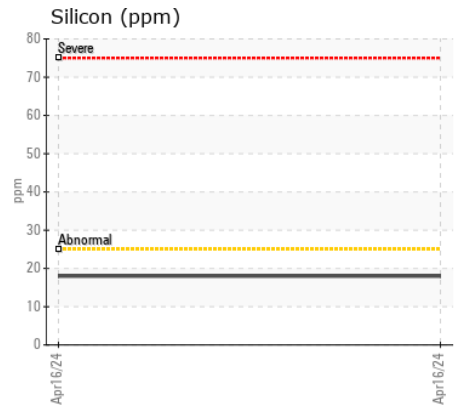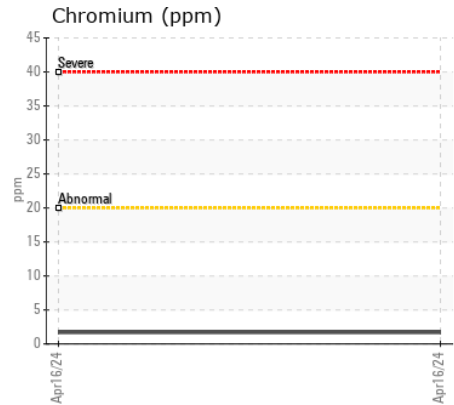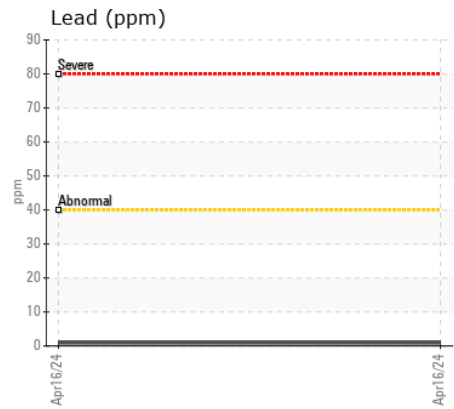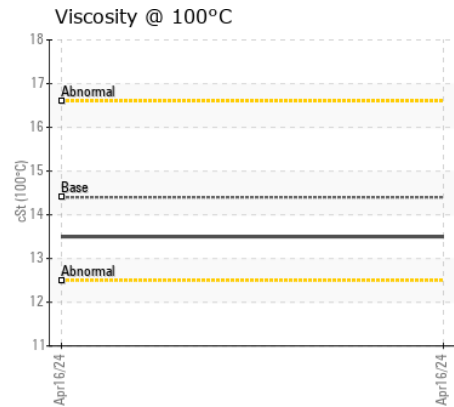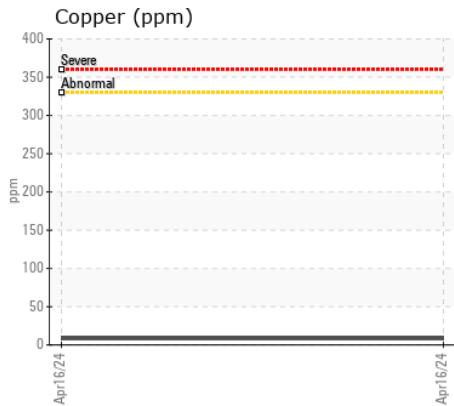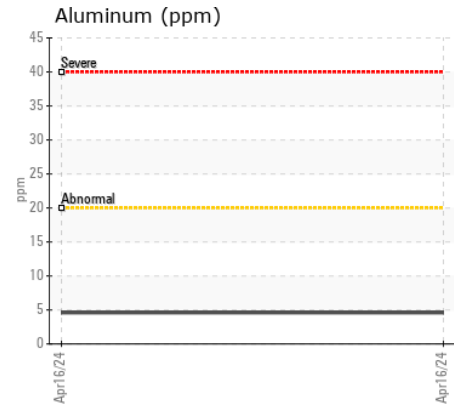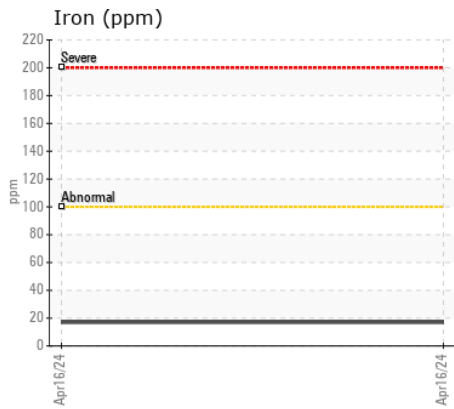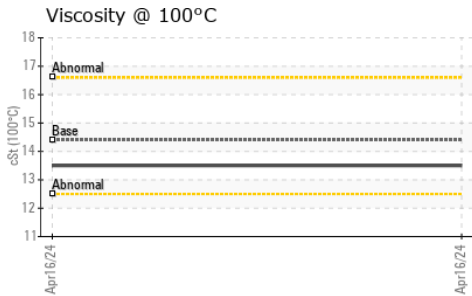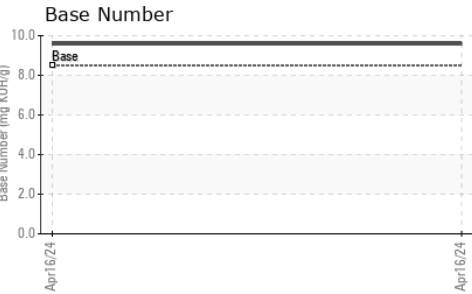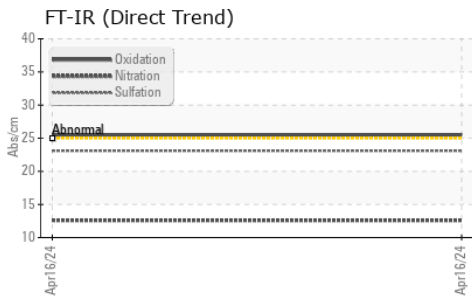

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : HPL0003891

Lab Number : 06153330

Unique Number : 10983408

Test Package : MOB 2

Received : 18 Apr 2024

Tested : 19 Apr 2024

Diagnosed : 22 Apr 2024 - Sean Felton

STEVENS ON CRANE

410 STEVENSON DR

BOLINGBROOK, IL

US 60440

Contact: DAVE KOEHNE

davidk@stevensoncrane.com

T: (630)972-9199

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)