



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[16W16050]

Machine Id

JOHN DEERE 524P 1DW524PAVMLZ10365

Component

Transmission (Manual)

Fluid

JOHN DEERE HY-GARD HYD/TRANS (23 QTS)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: 16W16050)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207091	JR0196587	JR0185606
Sample Date		Client Info		16 Apr 2024	12 Dec 2023	05 Sep 2023
Machine Age	hrs	Client Info		5955	5452	4996
Oil Age	hrs	Client Info		1914	1411	955
Filter Age	hrs	Client Info		1914	1411	955
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	28	17	16
Iron	ppm	ASTM D5185m	>200	20	16	14
Chromium	ppm	ASTM D5185m	>5	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>7	0	<1	<1
Aluminum	ppm	ASTM D5185m	>25	1	<1	2
Lead	ppm	ASTM D5185m	>45	<1	0	0
Copper	ppm	ASTM D5185m	>225	6	7	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	10	10	10
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	6	4
Boron	ppm	ASTM D5185m	6	1	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	95	101	103
Calcium	ppm	ASTM D5185m	3570	3354	3442	3533
Phosphorus	ppm	ASTM D5185m	1290	1019	1053	1011
Zinc	ppm	ASTM D5185m	1640	1197	1252	1234
Sulfur	ppm	ASTM D5185m		3998	3540	4069
Visc @ 40°C	cSt	ASTM D445	57.0	51.0	50.8	51.3

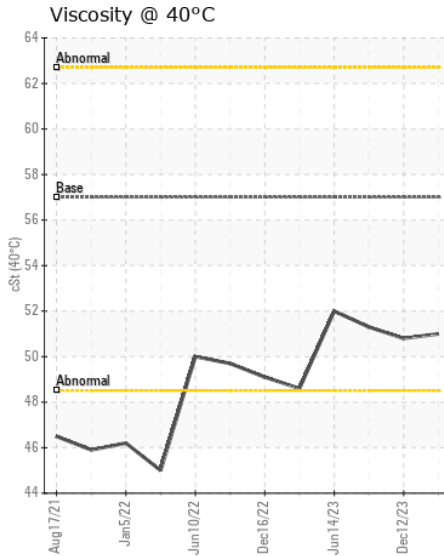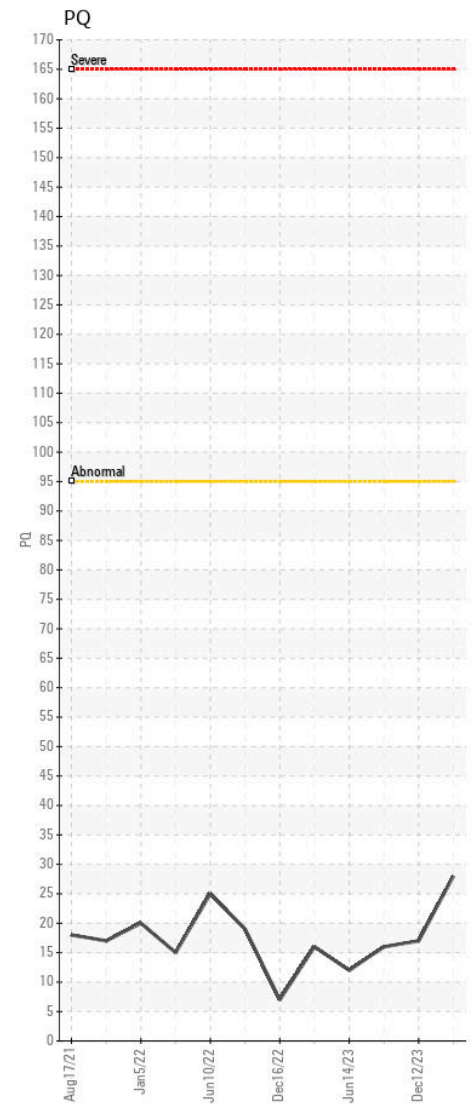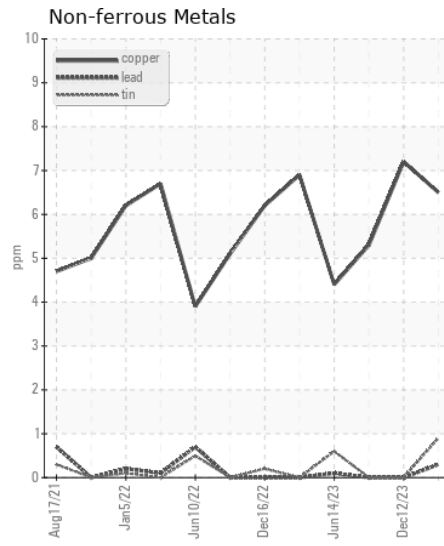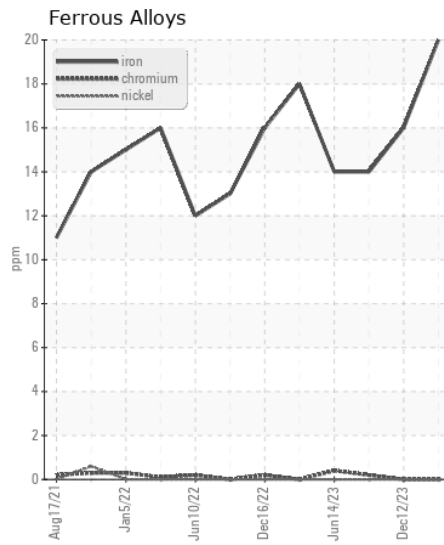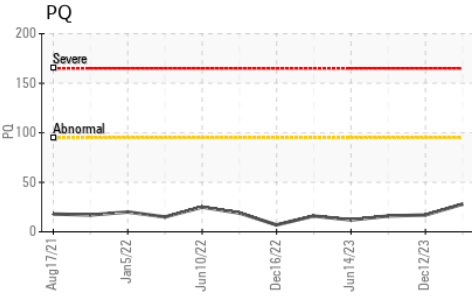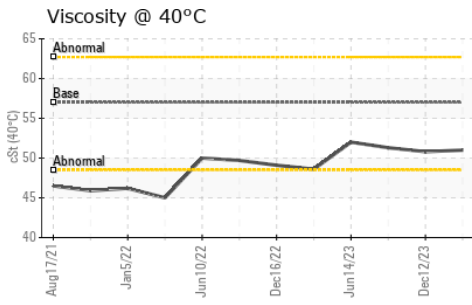

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207091 **Received** : 18 Apr 2024
Lab Number : 06153344 **Tested** : 19 Apr 2024
Unique Number : 10983422 **Diagnosed** : 22 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CASTLE HAYNE
 113 CROWATAN ROAD
 CASTLE HAYNE, NC
 US 28429-5819

Contact: WILMINGTON SHOP

todd.simmons@jamesriverequipment.com; canastasio@wearcheck.com; canastasio@we

T: (910)675-9211

F: