



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Store 2 - Beaver [RO#147458]
Machine Id
JOHN DEERE 550K 1T0550KKTNF432092
Component
Right Final Drive
Fluid
JOHN DEERE HY-GARD HYD/TRANS (2 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048924	LEC0037640	---
Sample Date		Client Info		16 Apr 2024	06 Jun 2023	---
Machine Age	hrs	Client Info		1100	583	---
Oil Age	hrs	Client Info		1100	583	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	58	46	---
Iron	ppm	ASTM D5185m	>750	83	62	---
Chromium	ppm	ASTM D5185m	>9	3	2	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	7	<1	---
Lead	ppm	ASTM D5185m	>15	1	0	---
Copper	ppm	ASTM D5185m	>40	1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	23	12	---
Potassium	ppm	ASTM D5185m	>20	6	<1	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	3	---
Boron	ppm	ASTM D5185m	6	0	0	---
Barium	ppm	ASTM D5185m	0	4	0	---
Molybdenum	ppm	ASTM D5185m	0	2	<1	---
Manganese	ppm	ASTM D5185m		5	3	---
Magnesium	ppm	ASTM D5185m	145	103	100	---
Calcium	ppm	ASTM D5185m	3570	3480	3479	---
Phosphorus	ppm	ASTM D5185m	1290	1150	1018	---
Zinc	ppm	ASTM D5185m	1640	1303	1246	---
Sulfur	ppm	ASTM D5185m		4203	4100	---
Visc @ 40°C	cSt	ASTM D445	57.0	50.4	51.6	---

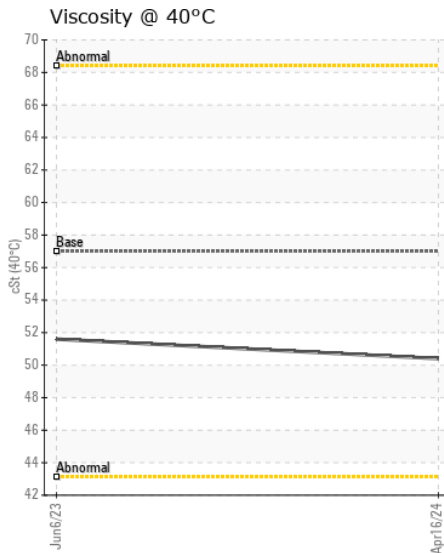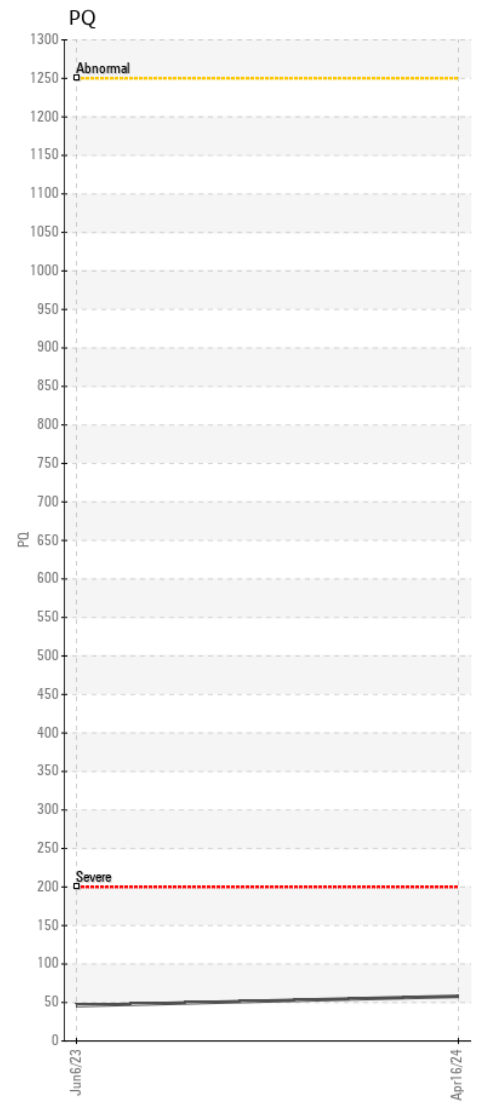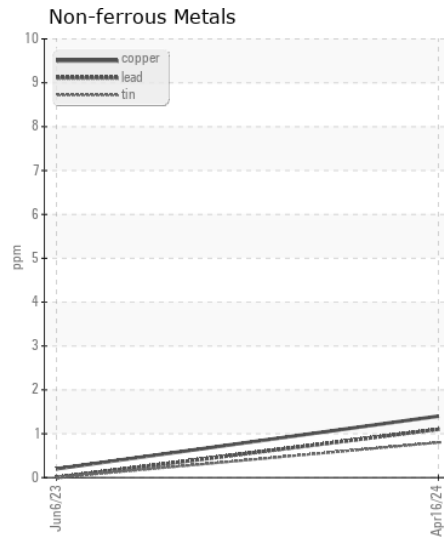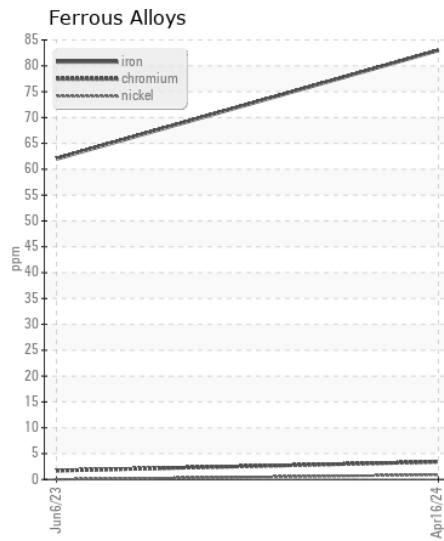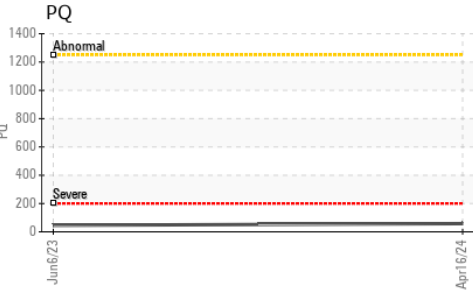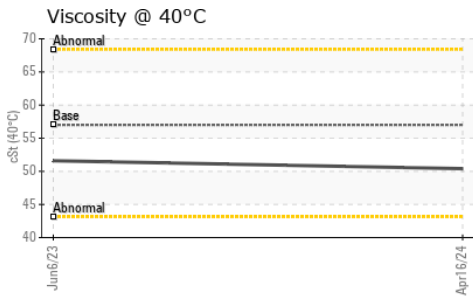

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048924 **Received** : 18 Apr 2024
Lab Number : 06153360 **Tested** : 19 Apr 2024
Unique Number : 10983438 **Diagnosed** : 19 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570