



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 624K 1DW624KZVGF678340**  
Component  
**Front Differential**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (6 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0210148</b>	JR0184774	JR0159714
Sample Date		Client Info		<b>16 Apr 2024</b>	06 Oct 2023	17 Mar 2023
Machine Age	hrs	Client Info		<b>8973</b>	8529	8027
Oil Age	hrs	Client Info		<b>8027</b>	0	0
Filter Age	hrs	Client Info		<b>8027</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Chngd	Changed
Filter Changed		Client Info		<b>Changed</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>13</b>	11	16
Iron	ppm	ASTM D5185m	>500	<b>27</b>	27	68
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	0	1
Lead	ppm	ASTM D5185m	>25	<b>20</b>	7	▲ 70
Copper	ppm	ASTM D5185m	>100	<b>8</b>	21	20
Tin	ppm	ASTM D5185m	>10	<b>1</b>	1	2
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	4
Boron	ppm	ASTM D5185m	6	<b>12</b>	12	6
Barium	ppm	ASTM D5185m	0	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>14</b>	14	7
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m	145	<b>131</b>	132	118
Calcium	ppm	ASTM D5185m	3570	<b>3252</b>	3072	3586
Phosphorus	ppm	ASTM D5185m	1290	<b>1054</b>	1001	1078
Zinc	ppm	ASTM D5185m	1640	<b>1195</b>	1217	1318
Sulfur	ppm	ASTM D5185m		<b>3915</b>	3601	4875
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.9</b>	52.7	49.8

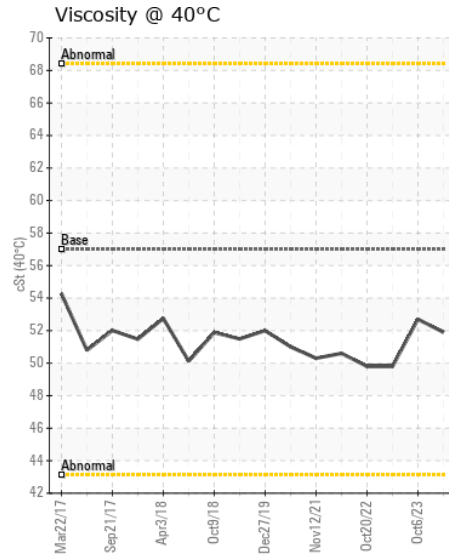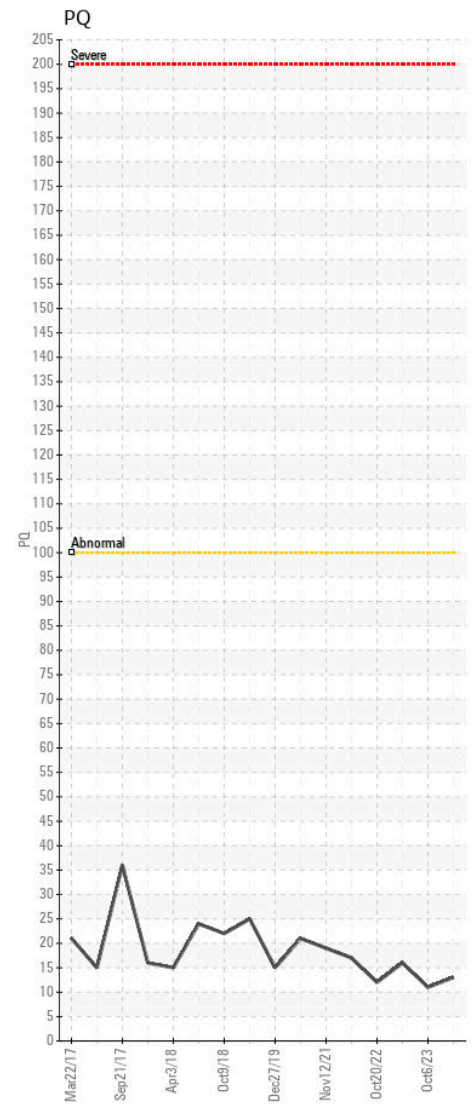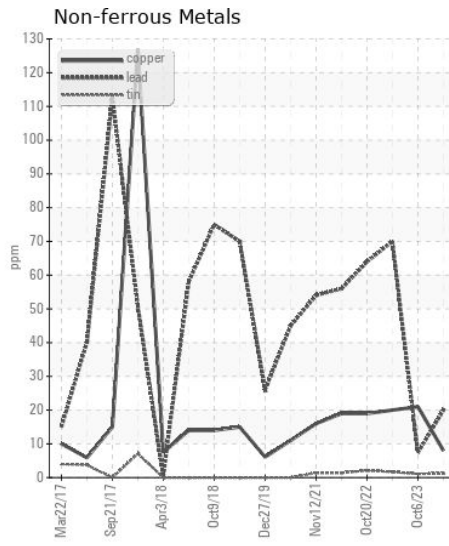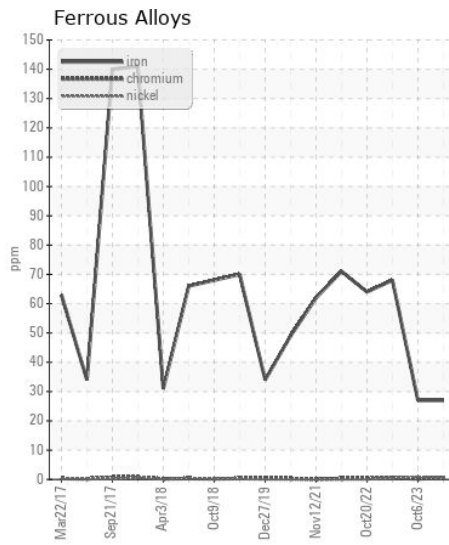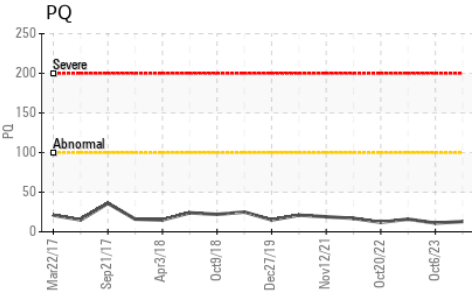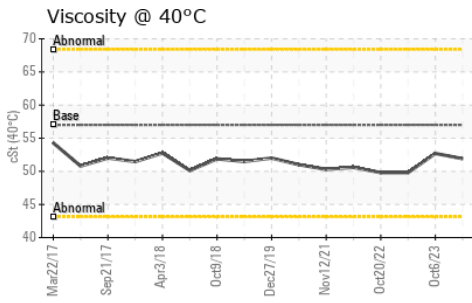

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0210148 **Received** : 18 Apr 2024  
**Lab Number** : 06153411 **Tested** : 19 Apr 2024  
**Unique Number** : 10983489 **Diagnosed** : 19 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - STEPHENSON**  
 245 YARDMASTER COURT  
 STEPHENSON, VA  
 US 22656-1761  
 Contact: PHIL DAUGHERTY  
 pdaugherty@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:  
 F: (540)693-2588