



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JLG 1255 016-0118 (S/N 0160086959)
 Component
Front Left Final Drive
 Fluid
SCHAEFFER SCHAEFFER 293 MOLY 75W90 (2 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0903840	WC0868332	WC0815024
Sample Date		Client Info		16 Apr 2024	27 Oct 2023	15 Aug 2023
Machine Age	hrs	Client Info		12777	11871	11041
Oil Age	hrs	Client Info		11041	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	126	52	106
Chromium	ppm	ASTM D5185m	>10	2	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	<1	3
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m	>50	7	2	5
Tin	ppm	ASTM D5185m	>10	<1	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	9	4	6
Potassium	ppm	ASTM D5185m	>20	1	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	<1
Boron	ppm	ASTM D5185m		11	7	9
Barium	ppm	ASTM D5185m		3	0	0
Molybdenum	ppm	ASTM D5185m		416	276	283
Manganese	ppm	ASTM D5185m		3	1	5
Magnesium	ppm	ASTM D5185m		17	10	1
Calcium	ppm	ASTM D5185m		106	66	97
Phosphorus	ppm	ASTM D5185m		794	461	548
Zinc	ppm	ASTM D5185m		84	56	50
Sulfur	ppm	ASTM D5185m		22728	12203	15292
Visc @ 40°C	cSt	ASTM D445		111	113	97.7

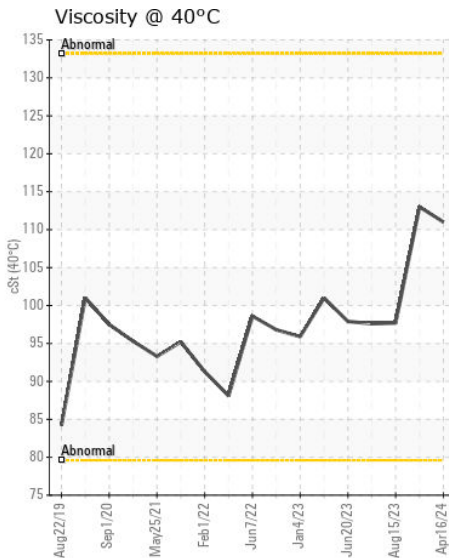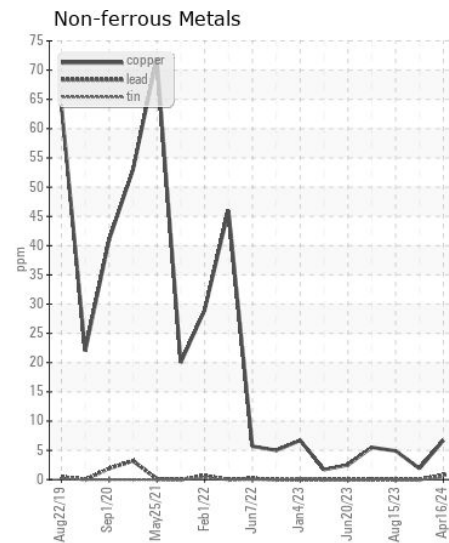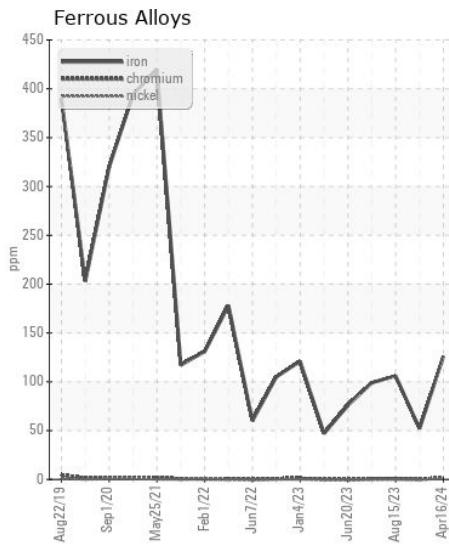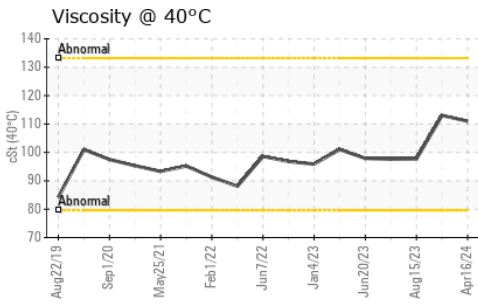

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0903840
Lab Number : 06153523
Unique Number : 10983601
Test Package : CONST
Received : 18 Apr 2024
Tested : 19 Apr 2024
Diagnosed : 19 Apr 2024 - Wes Davis

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: