



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Area

[Z20116]

Machine Id

COMBIE CRANE 8949 - SAMPLE 1

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 46 (120 LTR)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC06153554	---	---
Sample Date		Client Info		10 Mar 2024	---	---
Machine Age	hrs	Client Info		6950	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	22	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	2	---	---
Copper	ppm	ASTM D5185m	>75	4	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








There is a light amount of silt (particulates < 14 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>20	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	2140	---	---
Particles >6µm		ASTM D7647	>1300	1166	---	---
Particles >14µm		ASTM D7647	>160	198	---	---
Particles >21µm		ASTM D7647	>40	67	---	---
Particles >38µm		ASTM D7647	>10	10	---	---
Particles >71µm		ASTM D7647	>3	1	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/17/15	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	1	---	---
Molybdenum	ppm	ASTM D5185m	5	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	2	---	---
Calcium	ppm	ASTM D5185m	200	45	---	---
Phosphorus	ppm	ASTM D5185m	300	335	---	---
Zinc	ppm	ASTM D5185m	370	276	---	---
Sulfur	ppm	ASTM D5185m	2500	1023	---	---
Visc @ 40°C	cSt	ASTM D445	46	45.0	---	---

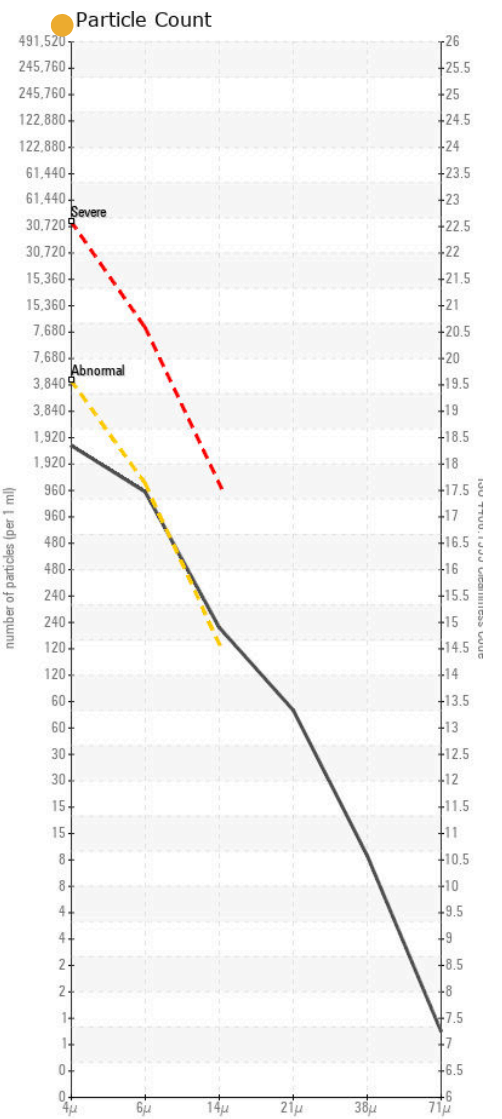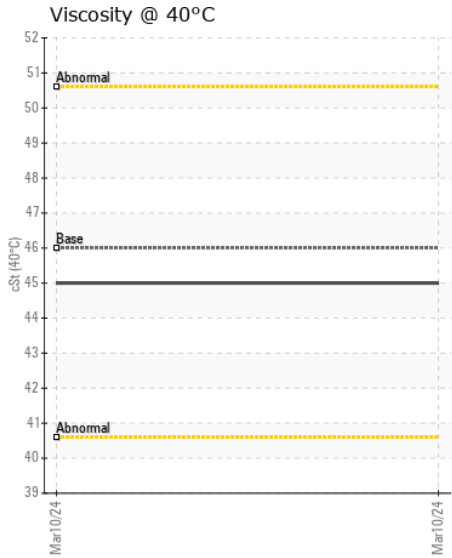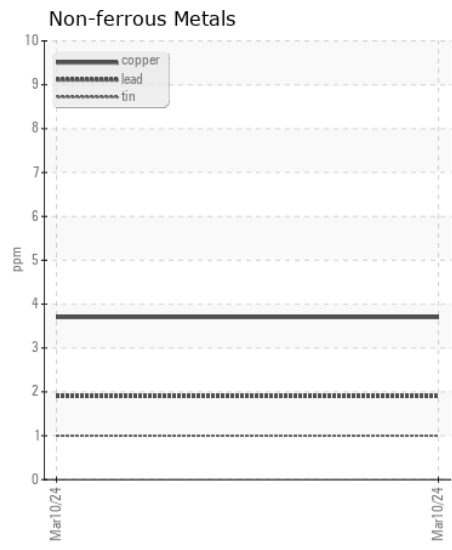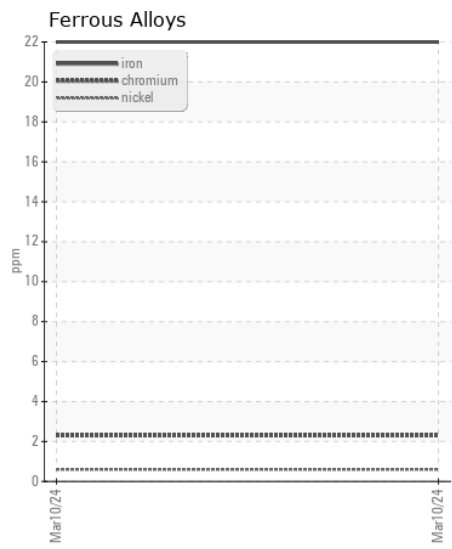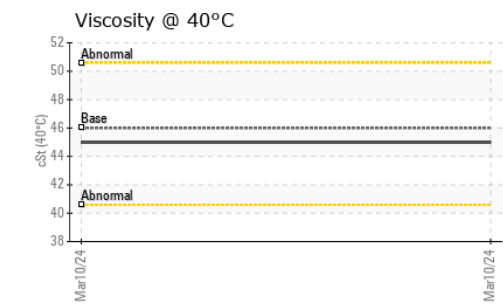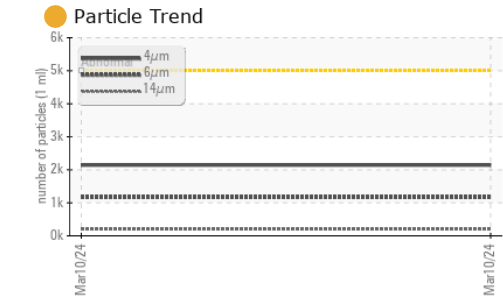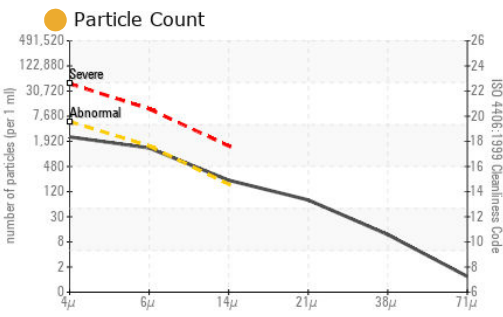

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC06153554 **Received** : 18 Apr 2024
Lab Number : 06153554 **Tested** : 23 Apr 2024
Unique Number : 10983632 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: PRTCOUNT)

GLOBAL OIL NZ
 62B MILTON RD
 OTUMOETAU, ZZ
 NZ 3110
 Contact: SCOTT NICHOLLS
 scott@astrea.co.nz
 T: (642)145-5680
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)