



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FREIGHTLINER 27701**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (40 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0903103</b>	WC0875792	WC0787699
Sample Date		Client Info		<b>04 Apr 2024</b>	20 Dec 2023	27 Jun 2023
Machine Age	hrs	Client Info		<b>257820</b>	237441	6382
Oil Age	hrs	Client Info		<b>60000</b>	0	0
Filter Age	hrs	Client Info		<b>60000</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	Changed
Filter Changed		Client Info		<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	<b>32</b>	24	19
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>2</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>17</b>	10	14
Lead	ppm	ASTM D5185m	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>7</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>8</b>	4	6
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.7	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.3</b>	11.7	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>27.2</b>	22.8	22.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>4</b>	2	2
Boron	ppm	ASTM D5185m	250	<b>118</b>	4	<1
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>76</b>	73	64
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>535</b>	974	1039
Calcium	ppm	ASTM D5185m	3000	<b>1445</b>	1215	1158
Phosphorus	ppm	ASTM D5185m	1150	<b>1037</b>	951	1060
Zinc	ppm	ASTM D5185m	1350	<b>1206</b>	1247	1339
Sulfur	ppm	ASTM D5185m	4250	<b>3664</b>	2787	3684
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>24.0</b>	21.4	19.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.8</b>	7.6	8.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.1</b>	13.2	13.0

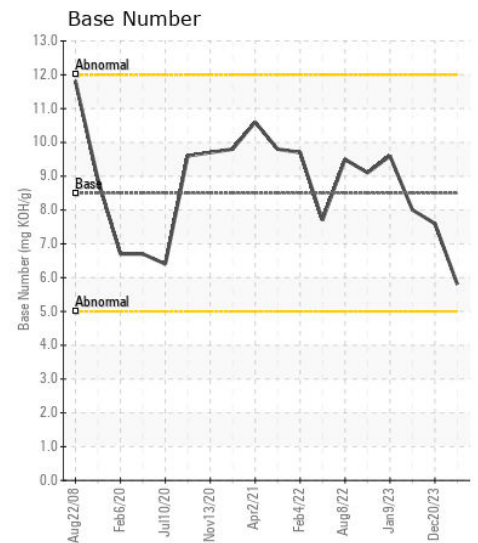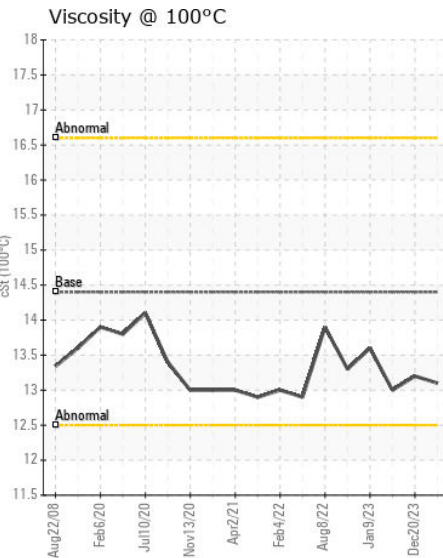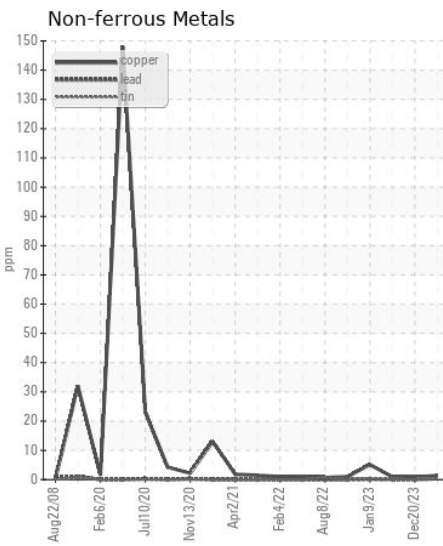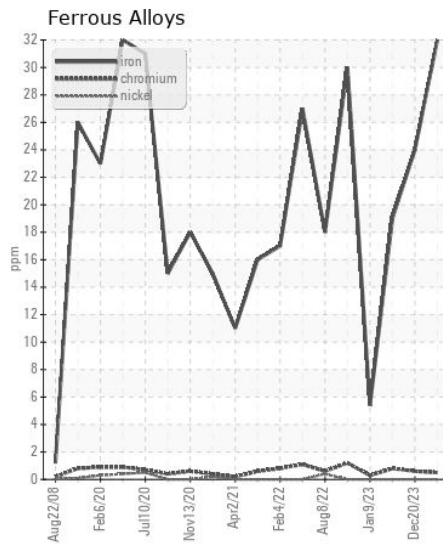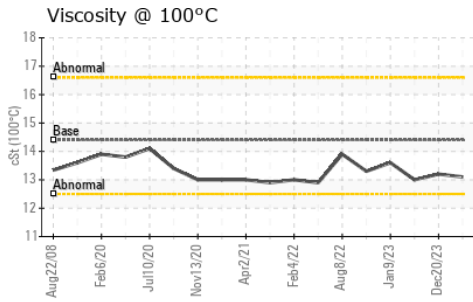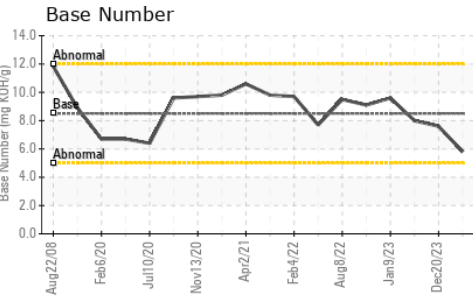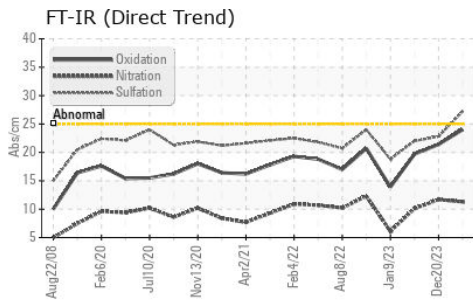

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0903103  
**Lab Number** : 06153723  
**Unique Number** : 10983801  
**Test Package** : FLEET

**Received** : 18 Apr 2024  
**Tested** : 19 Apr 2024  
**Diagnosed** : 19 Apr 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)