



WEAR CHECK

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3098
 Component
Diesel Engine
 Fluid
CHEVRON SUPREME MOTOR OIL 10W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0906901	WC0906938	WC0663222
Sample Date		Client Info		07 Apr 2024	19 Feb 2024	01 Feb 2024
Machine Age	mls	Client Info		431419	415843	408048
Oil Age	mls	Client Info		414819	377543	30744
Filter Age	mls	Client Info		16600	38296	30744
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	9	18	12
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	9	6
Lead	ppm	ASTM D5185m	>40	<1	0	0
Copper	ppm	ASTM D5185m	>330	8	2	3
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	8	7
Potassium	ppm	ASTM D5185m	>20	10	17	12
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.6	10.9	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	25.9	24.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	5	3
Boron	ppm	ASTM D5185m		39	23	24
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		1	2	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		793	753	802
Calcium	ppm	ASTM D5185m		1367	1410	1426
Phosphorus	ppm	ASTM D5185m	990	788	743	771
Zinc	ppm	ASTM D5185m	1100	859	805	890
Sulfur	ppm	ASTM D5185m		3641	2781	3106
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.4	22.1	19.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.0	6.5	4.8	5.2
Visc @ 100°C	cSt	ASTM D445	14.0	11.6	11.8	11.7

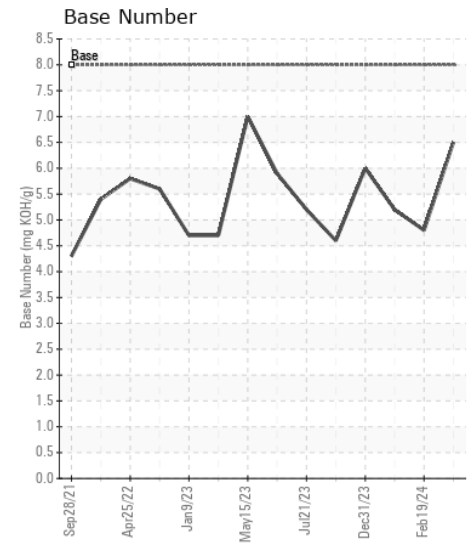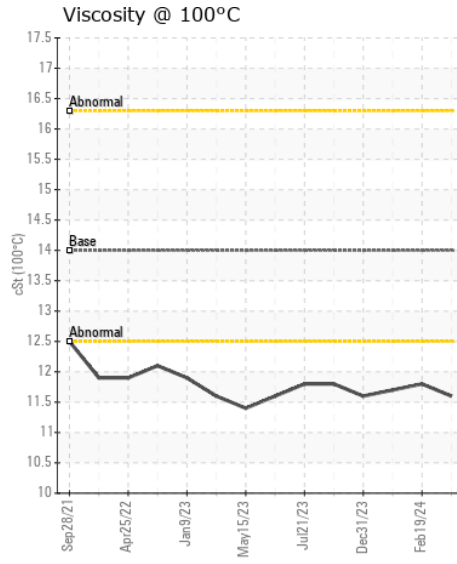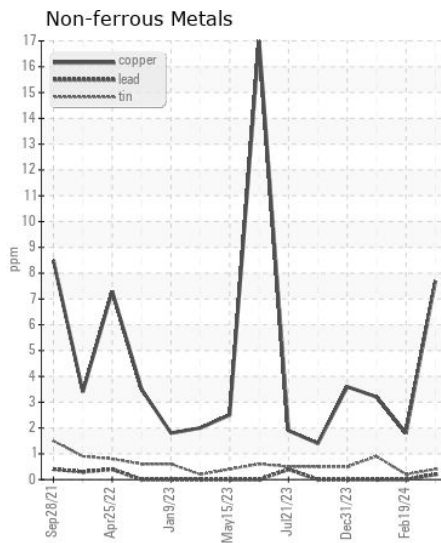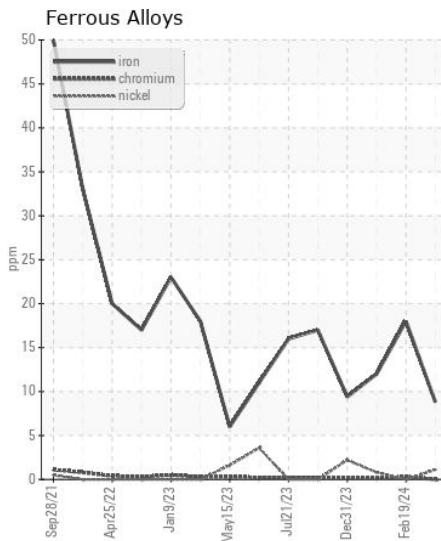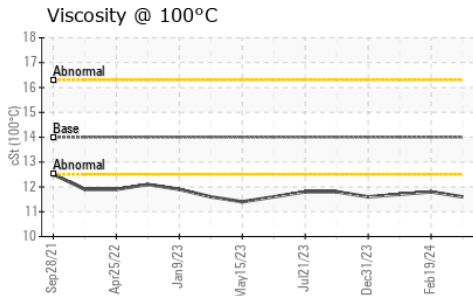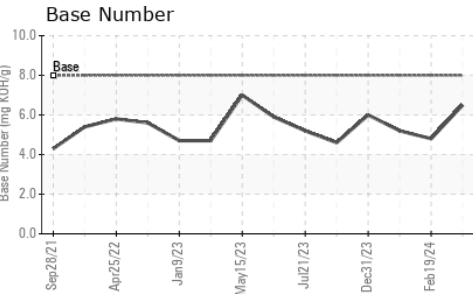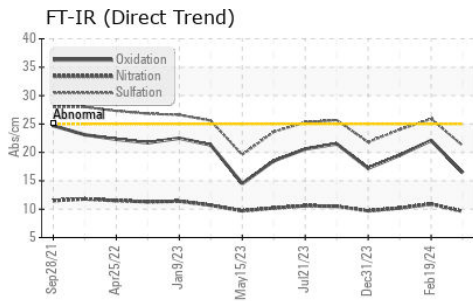

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0906901
Lab Number : 06153750
Unique Number : 10983828
Test Package : FLEET
Received : 18 Apr 2024
Tested : 20 Apr 2024
Diagnosed : 23 Apr 2024 - Sean Felton

LTI/MILKY WAY - SUNNYSIDE
 333 MIDVALE RD
 SUNNYSIDE, WA
 US 98944
 Contact: JERRY CRISP
 jcrisp@ltii.lynden.com
 T: (509)839-5844
 F: (509)839-6556

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)