



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SPM688428]

Machine Id

SENNEBOGEN 835M 835.0.3000

Component

Diesel Engine

Fluid

DIESEL ENGINE OIL SAE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP427238	VCP386784	VCP433710
Sample Date		Client Info		22 Mar 2024	11 Jan 2024	26 Oct 2023
Machine Age	hrs	Client Info		4647	4647	4088
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	11	10	10
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	1	2
Lead	ppm	ASTM D5185m	>40	<1	<1	0
Copper	ppm	ASTM D5185m	>330	<1	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	2	3	4
Potassium	ppm	ASTM D5185m	>20	0	3	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.2	9.0	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	20.0	20.5
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<1	<1	2
Boron	ppm	ASTM D5185m	250	0	<1	0
Barium	ppm	ASTM D5185m	10	0	1	0
Molybdenum	ppm	ASTM D5185m	100	62	59	61
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	450	1040	892	1021
Calcium	ppm	ASTM D5185m	3000	1156	971	1045
Phosphorus	ppm	ASTM D5185m	1150	1049	927	1003
Zinc	ppm	ASTM D5185m	1350	1246	1165	1340
Sulfur	ppm	ASTM D5185m	4250	3492	3011	3123
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.3	17.9	18.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	9.0	8.8	8.2
Visc @ 100°C	cSt	ASTM D445	14.4	12.8	12.8	13.0

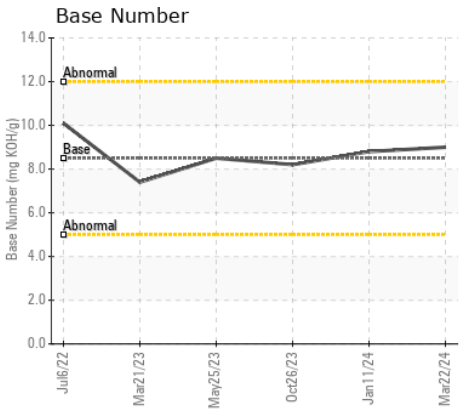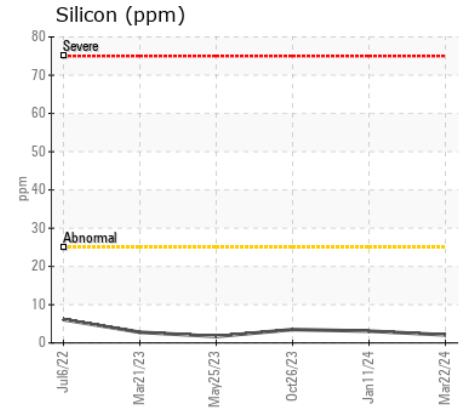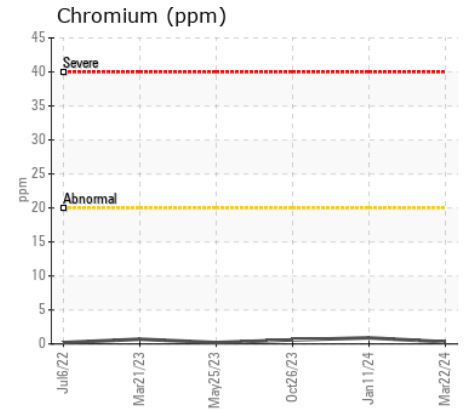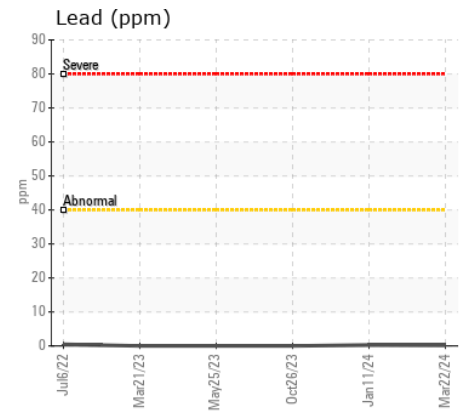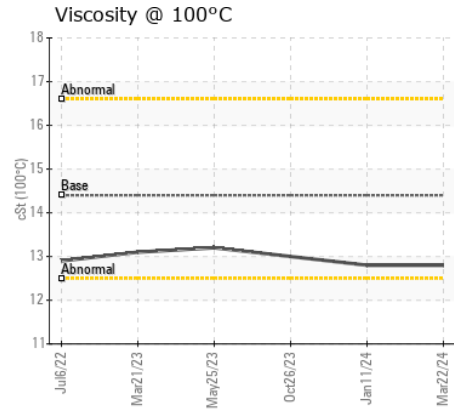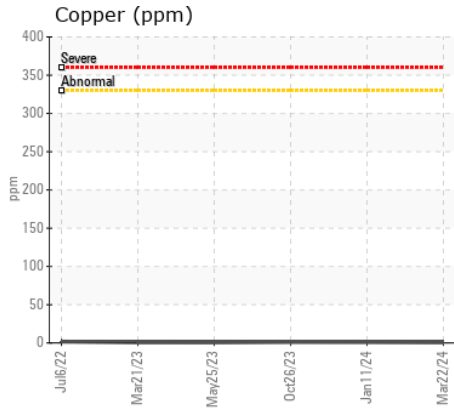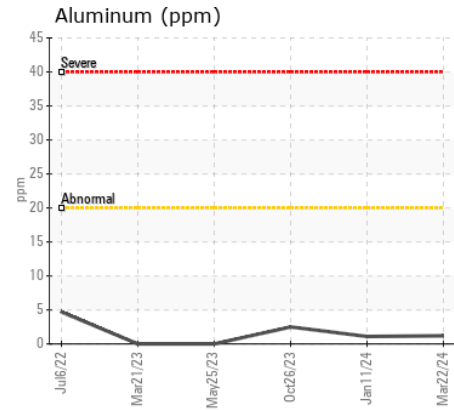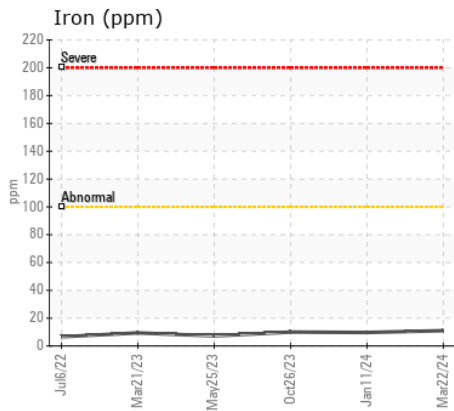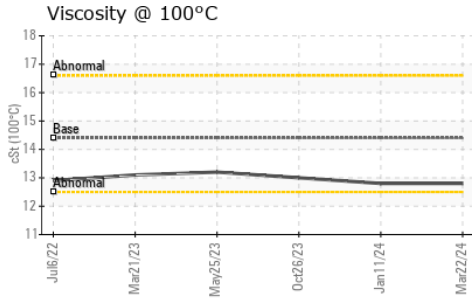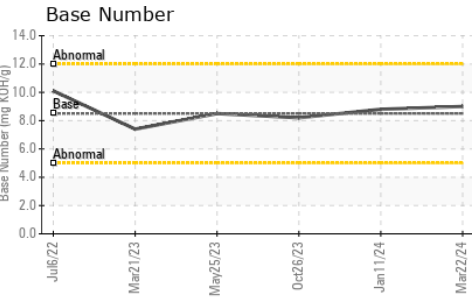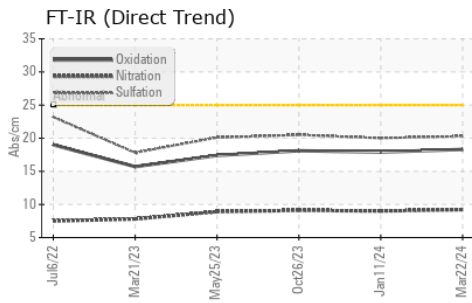

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP427238
Lab Number : 06153884
Unique Number : 10989307
Test Package : MOB 1 (Additional Tests: TBN)

Received : 19 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 22 Apr 2024 - Wes Davis

BELSON STEEL
 1685 N STATE RTE 50
 BOURBONNAIS, IL
 US 60914
 Contact: M. POZAN
 mpozan@belsonsteel.com
 T: (815)932-7416
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)