



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**VQU**  
Machine Id  
**VQU (S/N RG6090L144364)**  
Component  
**Starboard Genset**  
Fluid  
**CHEVRON DELO 710 LS (8 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0060717</b>	MW0060724	MW0060711
Sample Date		Client Info		<b>18 Feb 2024</b>	28 Jan 2024	06 Jan 2024
Machine Age	hrs	Client Info		<b>10242</b>	10017	9736
Oil Age	hrs	Client Info		<b>225</b>	267	280
Filter Age	hrs	Client Info		<b>225</b>	267	280
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	<b>4</b>	5	2
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>12	<b>1</b>	2	2
Lead	ppm	ASTM D5185m	>17	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>70	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>2</b>	4	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	0
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844		<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	7.6	7.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>14.7</b>	15.0	15.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	2	<1
Boron	ppm	ASTM D5185m		<b>38</b>	33	41
Barium	ppm	ASTM D5185m		<b>0</b>	34	0
Molybdenum	ppm	ASTM D5185m		<b>43</b>	42	42
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>12</b>	13	16
Calcium	ppm	ASTM D5185m		<b>3316</b>	2850	3179
Phosphorus	ppm	ASTM D5185m		<b>2</b>	42	2
Zinc	ppm	ASTM D5185m		<b>0</b>	34	0
Sulfur	ppm	ASTM D5185m		<b>2453</b>	2000	2087
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>8.2</b>	8.4	8.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.5	<b>6.2</b>	5.8	5.8
Visc @ 100°C	cSt	ASTM D445	15.5	<b>14.5</b>	14.5	14.4


**FT-IR (Direct Trend)**

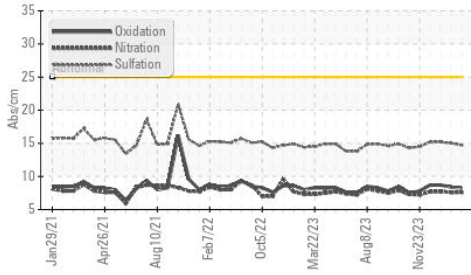


**Base Number**

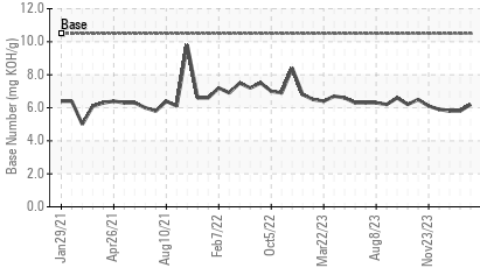


**Viscosity @ 100°C**

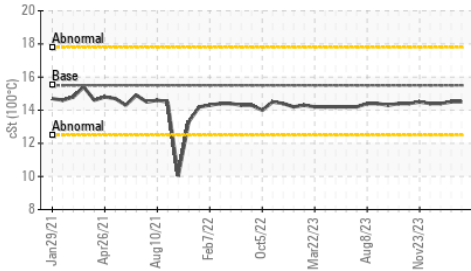


**Ferrous Alloys**

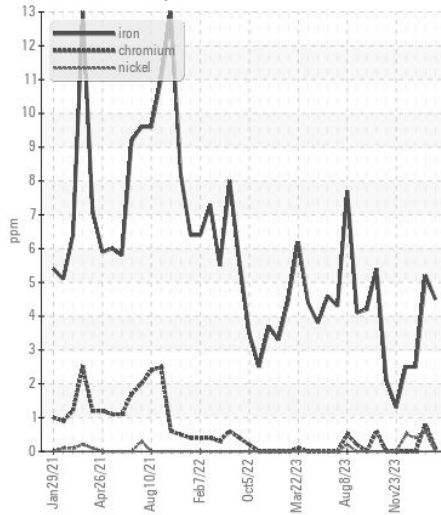


**Non-ferrous Metals**

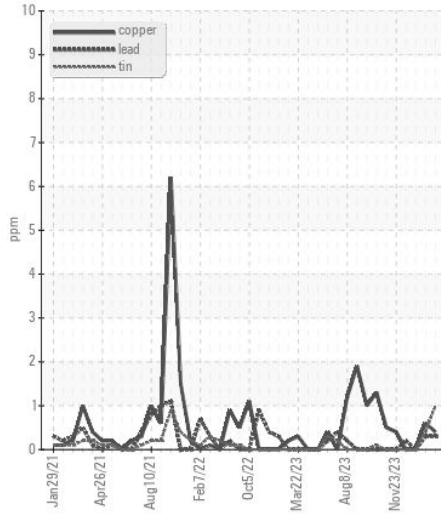

**Viscosity @ 100°C**

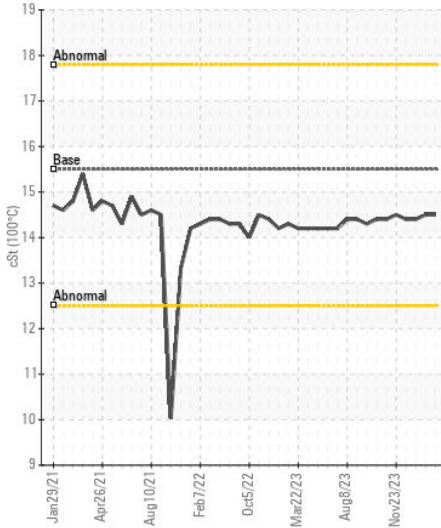

**Base Number**

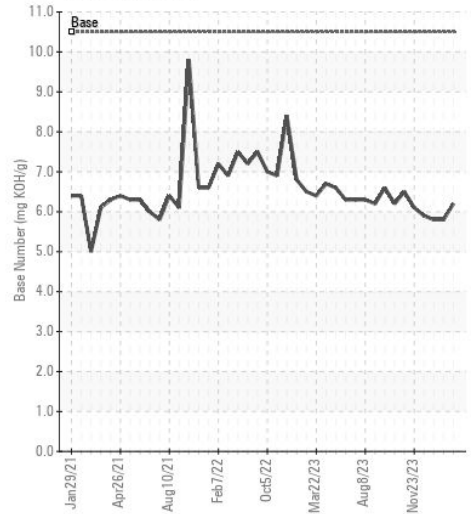

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : MW0060717  
**Lab Number** : 06153929  
**Unique Number** : 10989352  
**Test Package** : MAR 2

**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Wes Davis

**AMERICAN RIVER TRANSPORTATION CO.**  
 P.O. BOX 2889  
 ST. LOUIS, MO  
 US 63111

Contact: GST ENGINEEROM  
 gst\_engineerom@admworld.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (314)481-5278