



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2594**  
 Component  
**Front Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RW0005073</b>	---	---
Sample Date		Client Info		<b>08 Apr 2024</b>	---	---
Machine Age	mls	Client Info		<b>159923</b>	---	---
Oil Age	mls	Client Info		<b>69000</b>	---	---
Filter Age	mls	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>70</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	---	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>100	<b>9</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>21</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	---	---
Water		WC Method	>.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Boron	ppm	ASTM D5185m	400	<b>199</b>	---	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	150	<b>5</b>	---	---
Phosphorus	ppm	ASTM D5185m	1650	<b>1232</b>	---	---
Zinc	ppm	ASTM D5185m	125	<b>2</b>	---	---
Sulfur	ppm	ASTM D5185m	22500	<b>23757</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	2.00	<b>2.09</b>	---	---
Visc @ 40°C	cSt	ASTM D445	109	<b>104</b>	---	---

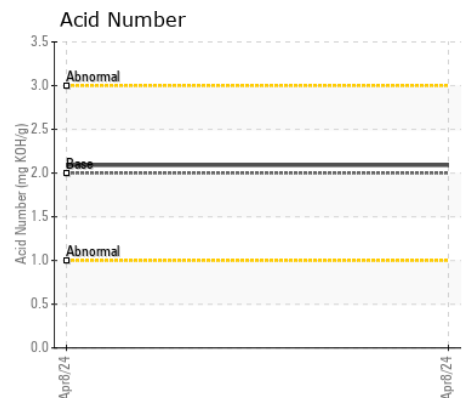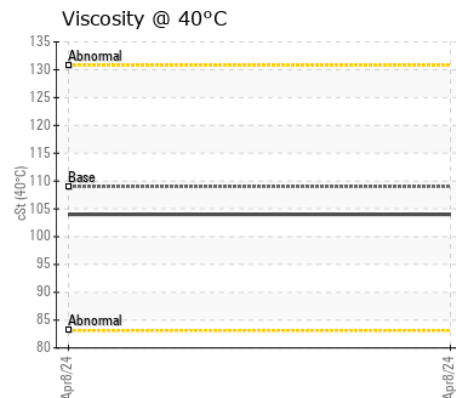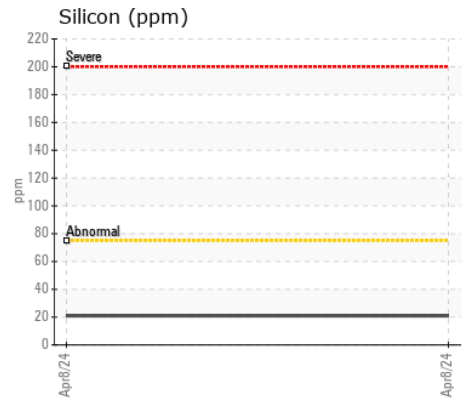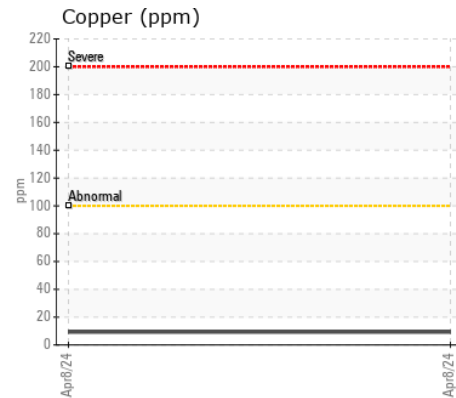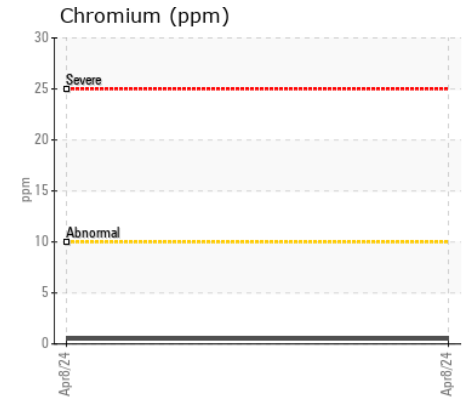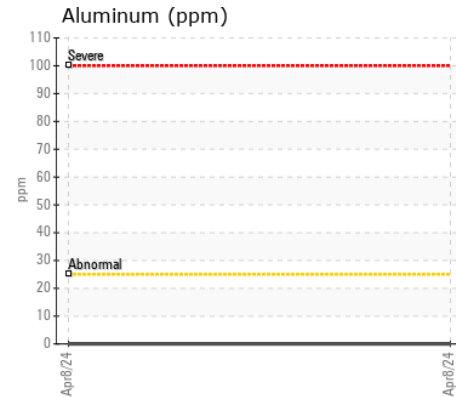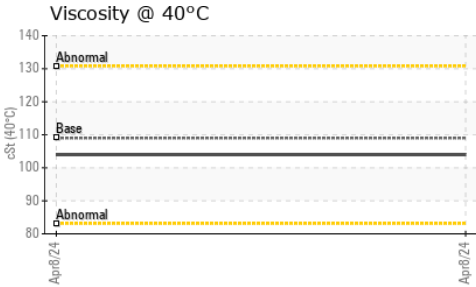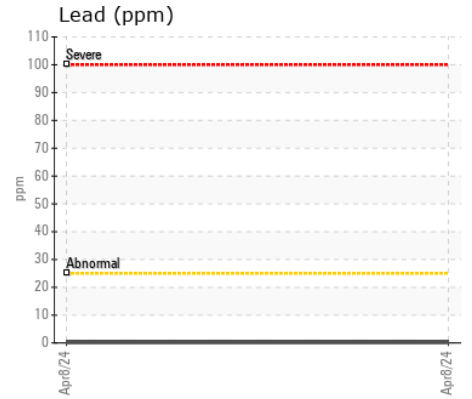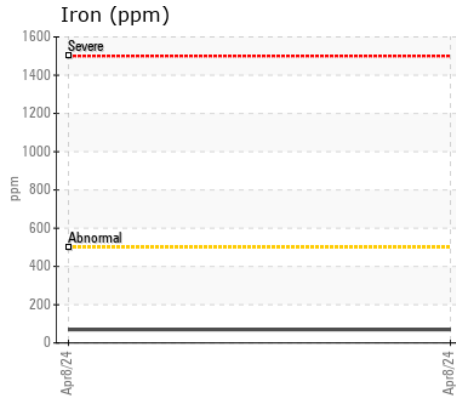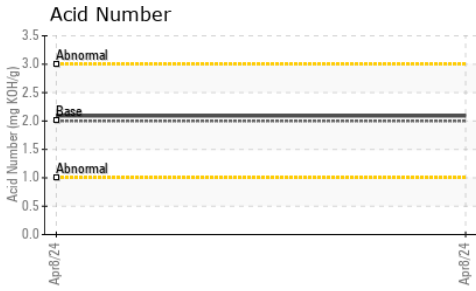

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : RW0005073

**Lab Number** : 06154609

**Unique Number** : 10990032

**Test Package** : MOB 2

**Received** : 19 Apr 2024

**Tested** : 22 Apr 2024

**Diagnosed** : 22 Apr 2024 - Wes Davis

**NEWKIRK ELECTRIC**

1875 ROBERTS ST.

MUSKEGON, MI

US 49442

Contact: ERIC KING

ewking@newkirk-electric.com

T: (231)206-6131

F: (231)724-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)