



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[W8765]**  
 Machine Id  
**JOHN DEERE 824K 1DW824KXPHF679619**  
 Component  
**Transmission (Manual)**  
 Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (30 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W8765 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0197177</b>	JR0183283	---
Sample Date		Client Info		<b>16 Apr 2024</b>	22 Jan 2024	---
Machine Age	hrs	Client Info		<b>13976</b>	13495	---
Oil Age	hrs	Client Info		<b>13976</b>	13495	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>23</b>	17	---
Iron	ppm	ASTM D5185m	>200	<b>29</b>	28	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	3	---
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>225	<b>2</b>	3	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>4</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	0	---
Boron	ppm	ASTM D5185m	6	<b>7</b>	10	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	145	<b>86</b>	88	---
Calcium	ppm	ASTM D5185m	3570	<b>3225</b>	3404	---
Phosphorus	ppm	ASTM D5185m	1290	<b>951</b>	1034	---
Zinc	ppm	ASTM D5185m	1640	<b>1053</b>	1254	---
Sulfur	ppm	ASTM D5185m		<b>3721</b>	4021	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>49.4</b>	49.1	---

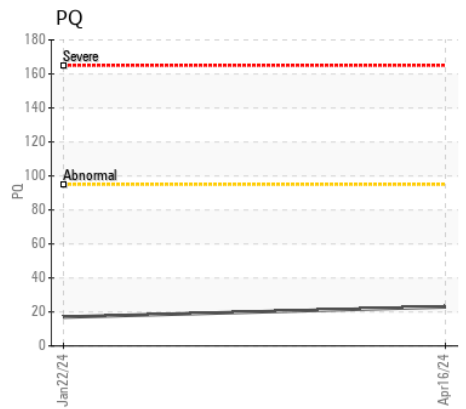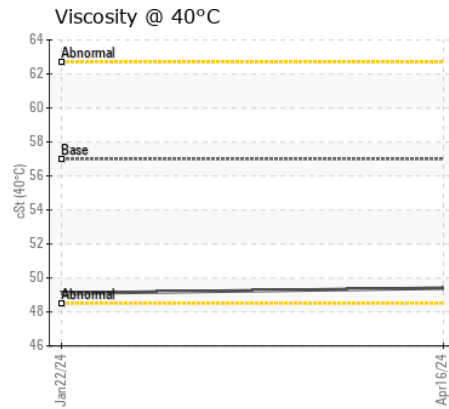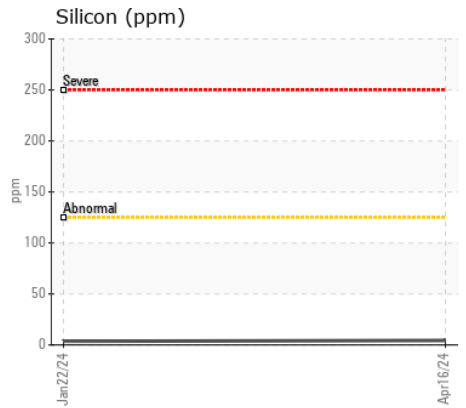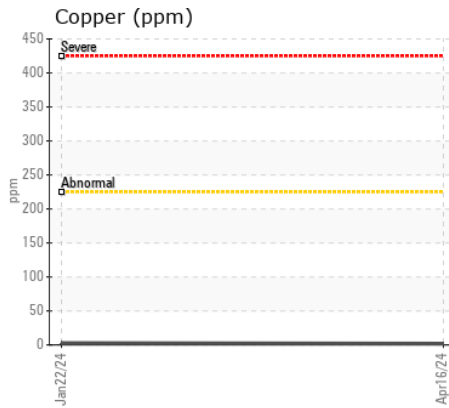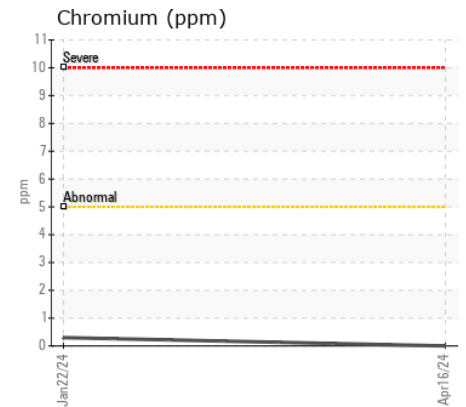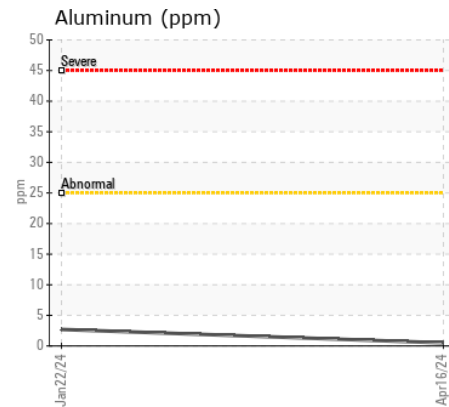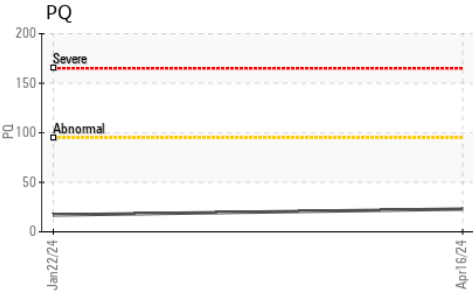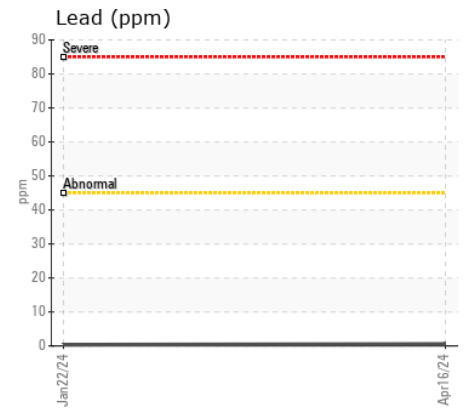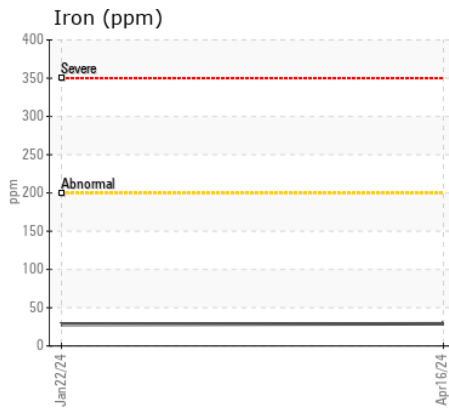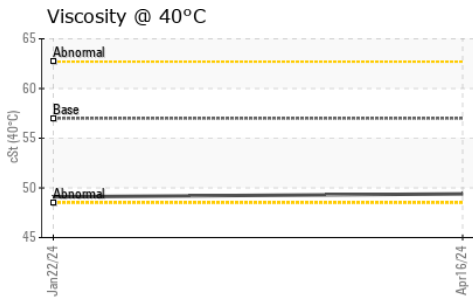

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0197177 **Received** : 19 Apr 2024  
**Lab Number** : 06154677 **Tested** : 22 Apr 2024  
**Unique Number** : 10990100 **Diagnosed** : 23 Apr 2024 - Sean Felton  
**Test Package** : MOBCE ( Additional Tests: PQ )

**JRE - HOPE MILLS/FAYETTEVILLE**  
 5039 HWY 301 SOUTH  
 HOPE MILLS, NC  
 US 28348  
 Contact: FAYETTEVILLE SHOP  
 stephen.mullis@jamesriverequipment.com;canastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: