



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**CHRISTOPHER CONTRACTING [A35176]**  
Machine Id  
**JOHN DEERE 524P 1DW524PAJMLZ12954**  
Component  
**Brake**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (1 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: A35176 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006553</b>	WE0005910	WE0004867
Sample Date		Client Info		<b>17 Apr 2024</b>	26 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		<b>1945</b>	1512	1005
Oil Age	hrs	Client Info		<b>940</b>	507	500
Filter Age	hrs	Client Info		<b>0</b>	507	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	SEVERE	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>34</b>	29	44
Iron	ppm	ASTM D5185m	>350	<b>36</b>	85	75
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	0	5
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>8	<b>2</b>	<1	4
Lead	ppm	ASTM D5185m	>10	<b>4</b>	▲ 52	16
Copper	ppm	ASTM D5185m	>150	<b>3</b>	▲ 463	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	2	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>400	<b>100</b>	6	312
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>4</b>	3	3
Boron	ppm	ASTM D5185m	6	<b>15</b>	0	84
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	4
Molybdenum	ppm	ASTM D5185m	0	<b>17</b>	1	104
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	2
Magnesium	ppm	ASTM D5185m	145	<b>124</b>	85	285
Calcium	ppm	ASTM D5185m	3570	<b>3234</b>	3394	2925
Phosphorus	ppm	ASTM D5185m	1290	<b>938</b>	919	981
Zinc	ppm	ASTM D5185m	1640	<b>994</b>	1082	1121
Sulfur	ppm	ASTM D5185m		<b>3689</b>	3274	3656
Visc @ 40°C	cSt	ASTM D445	57.0	<b>51.6</b>	53.6	50.0

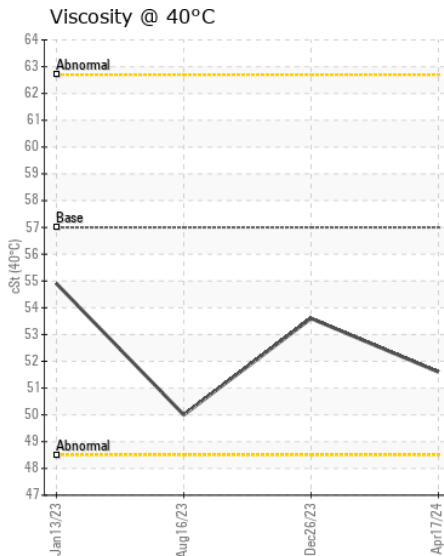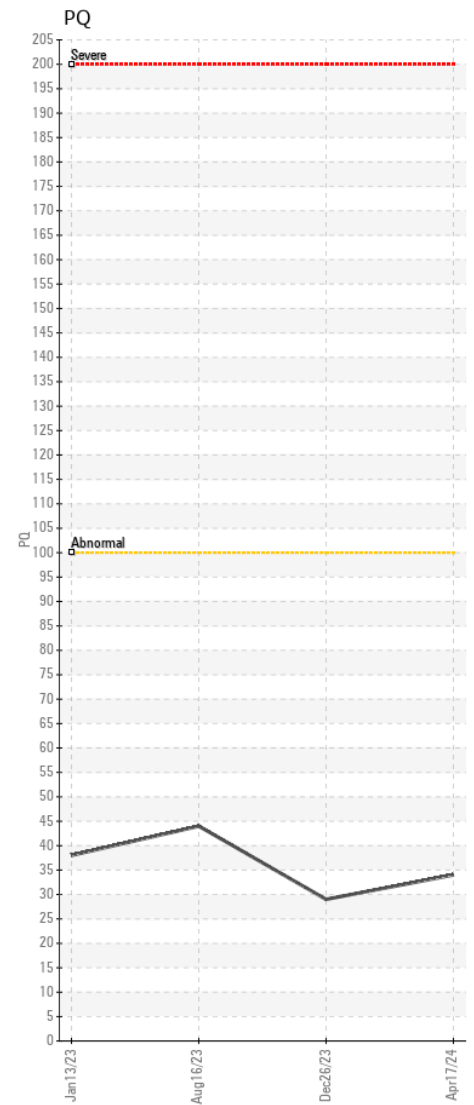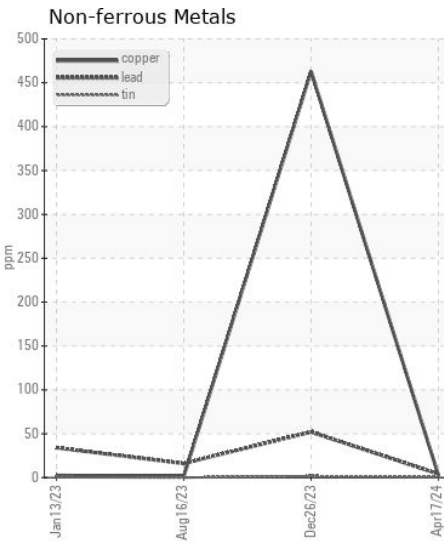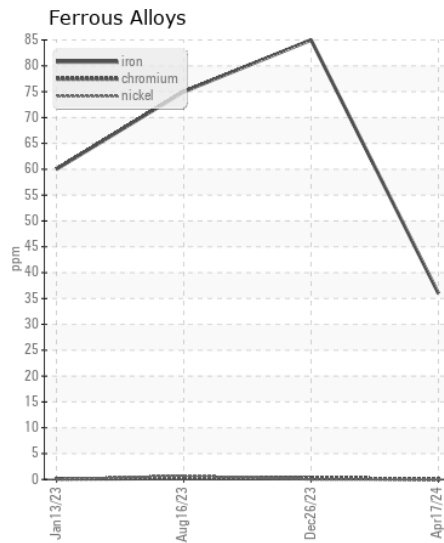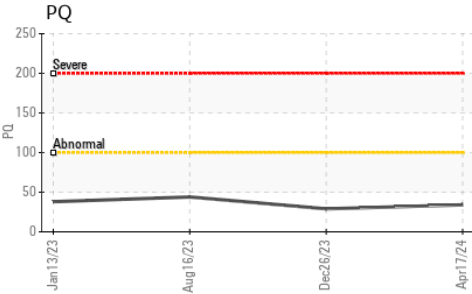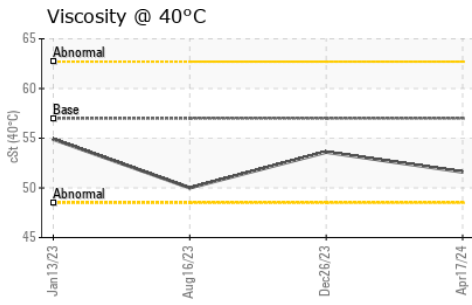

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006553 **Received** : 19 Apr 2024  
**Lab Number** : 06154760 **Tested** : 22 Apr 2024  
**Unique Number** : 10990183 **Diagnosed** : 23 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - HUNTSVILLE**  
 25135 ONE AVIATION WAY SW  
 MADISON, AL  
 US 35756  
 Contact: BOBBY LUCKY  
 warriorparts033@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: