



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SPM688692]

Machine Id

SENNEBOGEN 835ME 835.0.2542

Component

Rear Left Final Drive

Fluid

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP426436	VCP404746	VCP353613
Sample Date		Client Info		01 Apr 2024	04 Apr 2023	06 Jul 2022
Machine Age	hrs	Client Info		9624	7921	6511
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	106	109	81
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		<1	0	1
Aluminum	ppm	ASTM D5185m	>25	1	0	1
Lead	ppm	ASTM D5185m	>25	0	0	<1
Copper	ppm	ASTM D5185m	>50	39	16	9
Tin	ppm	ASTM D5185m	>10	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	20	16	8
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	<1	0
Boron	ppm	ASTM D5185m	400	9	9	13
Barium	ppm	ASTM D5185m	200	2	0	0
Molybdenum	ppm	ASTM D5185m	12	2	4	4
Manganese	ppm	ASTM D5185m		3	2	1
Magnesium	ppm	ASTM D5185m	12	26	42	39
Calcium	ppm	ASTM D5185m	150	2163	2270	2180
Phosphorus	ppm	ASTM D5185m	1650	841	943	912
Zinc	ppm	ASTM D5185m	125	981	1158	1122
Sulfur	ppm	ASTM D5185m	22500	6742	5848	5605
Visc @ 40°C	cSt	ASTM D445	143	196	122	111

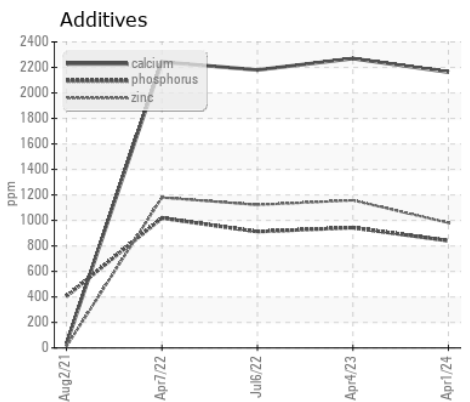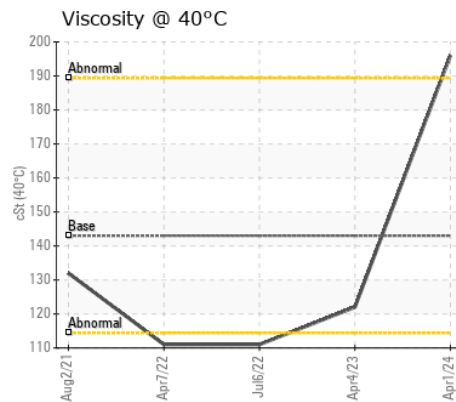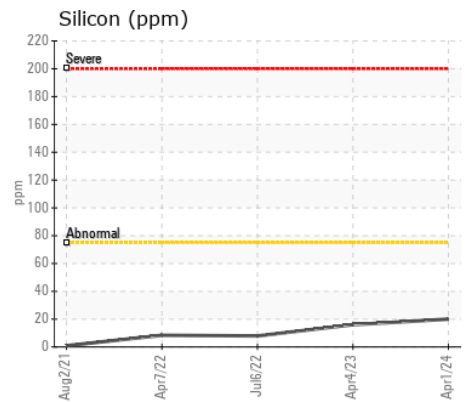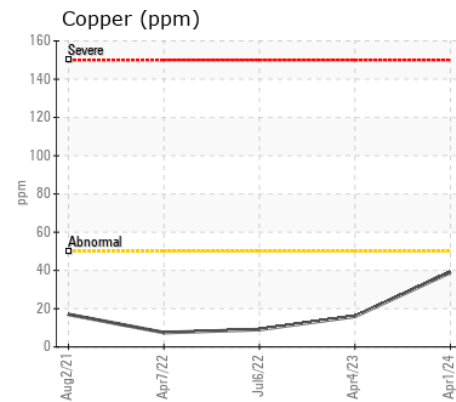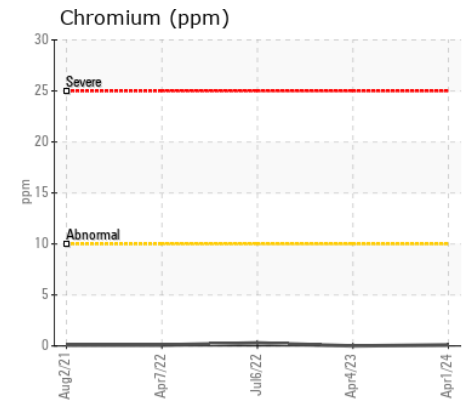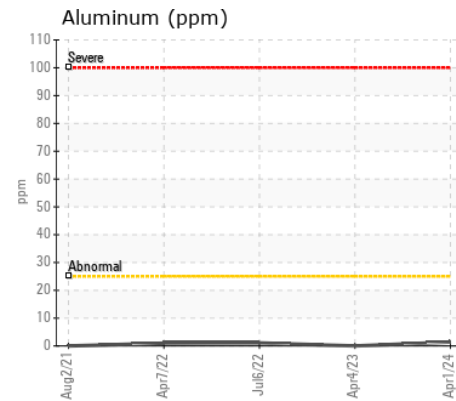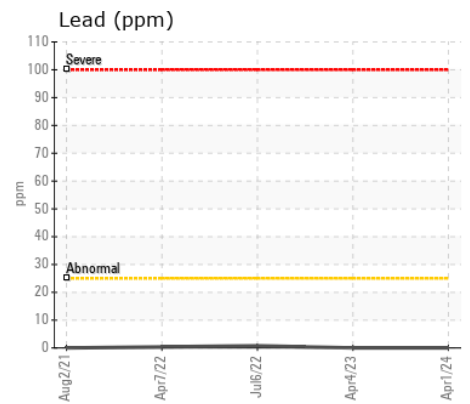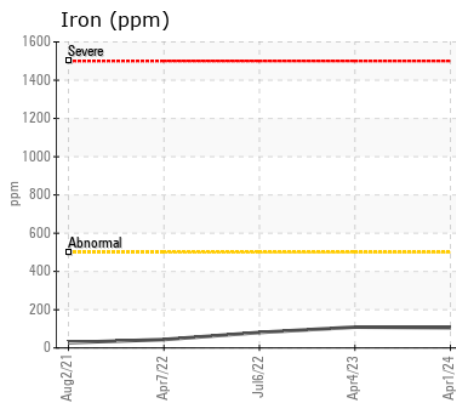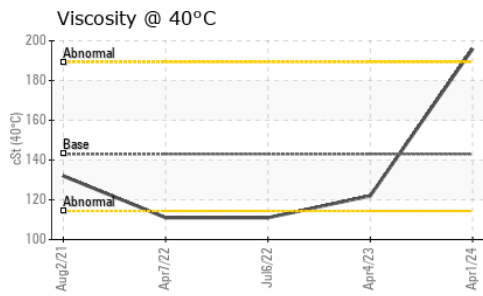

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP426436 **Received** : 19 Apr 2024
Lab Number : 06154863 **Tested** : 22 Apr 2024
Unique Number : 10990286 **Diagnosed** : 23 Apr 2024 - Don Baldrige
Test Package : MOB 1

SIMS METAL MANAGEMENT
 2500 S. PAULINA
 CHICAGO, IL
 US 60608
 Contact: RYAN WISE
 ryan.wise@simsmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: