



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[SPM688848]**  
 Machine Id  
**VOLVO EC480EL 315144**  
 Component  
**Right Final Drive**  
 Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP443594</b>	VCP420676	---
Sample Date		Client Info		<b>02 Apr 2024</b>	18 Jul 2023	---
Machine Age	hrs	Client Info		<b>1019</b>	436	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Changed	---
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	ATTENTION	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>3360	<b>108</b>	3	---
Chromium	ppm	ASTM D5185m	>35	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>8	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	>15	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>185	<b>1</b>	1	---
Lead	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>80	<b>40</b>	0	---
Tin	ppm	ASTM D5185m	>8	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>1100	<b>21</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185m	400	<b>11</b>	195	---
Barium	ppm	ASTM D5185m	200	<b>&lt;1</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>2</b>	0	---
Manganese	ppm	ASTM D5185m		<b>3</b>	0	---
Magnesium	ppm	ASTM D5185m	12	<b>25</b>	0	---
Calcium	ppm	ASTM D5185m	150	<b>2159</b>	2	---
Phosphorus	ppm	ASTM D5185m	1650	<b>858</b>	972	---
Zinc	ppm	ASTM D5185m	125	<b>984</b>	0	---
Sulfur	ppm	ASTM D5185m	22500	<b>7154</b>	25056	---
Visc @ 40°C	cSt	ASTM D445	143	<b>196</b>	147	---

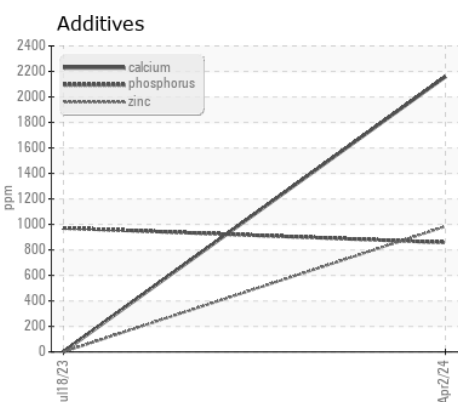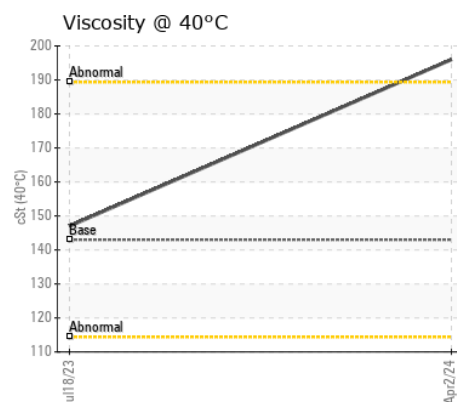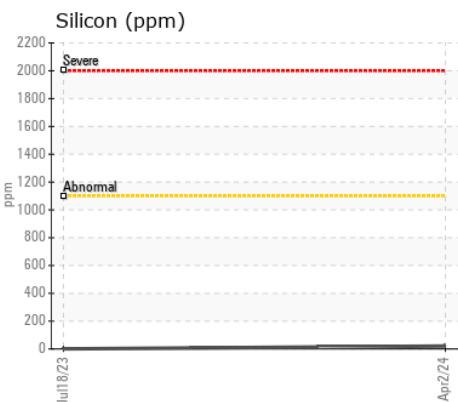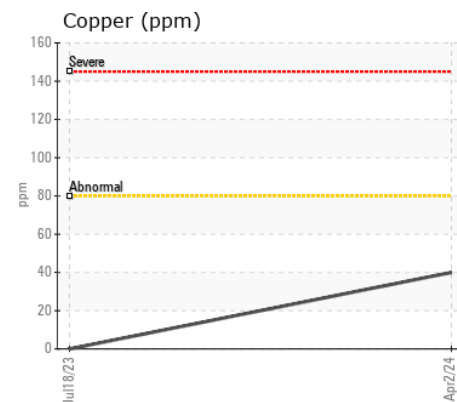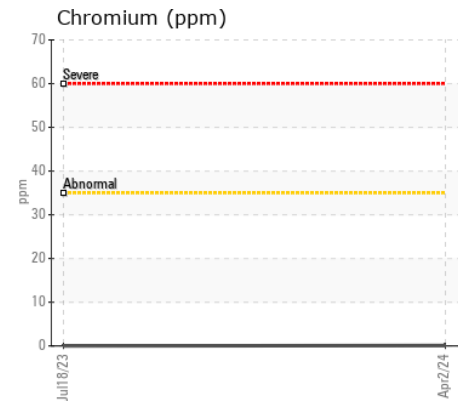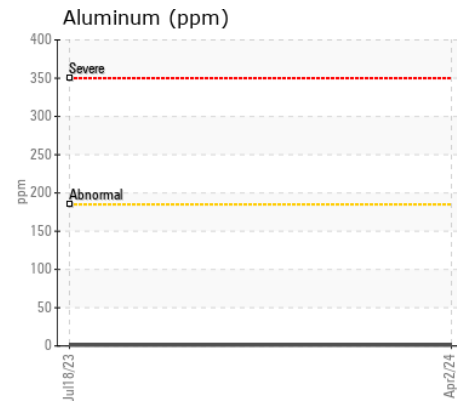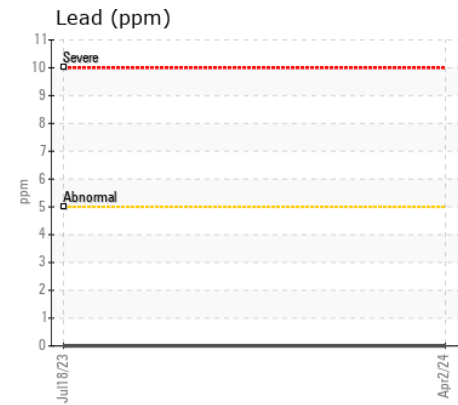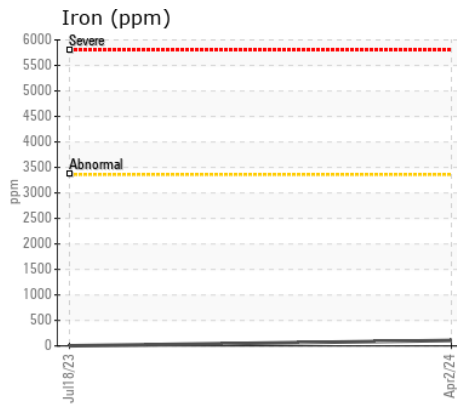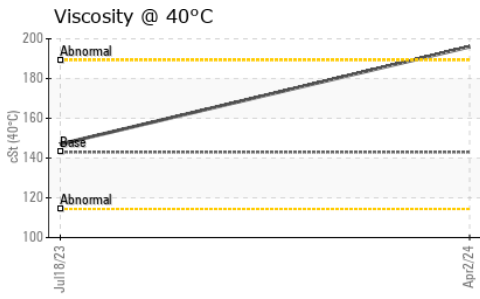

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP443594 **Received** : 19 Apr 2024  
**Lab Number** : 06154865 **Tested** : 22 Apr 2024  
**Unique Number** : 10990288 **Diagnosed** : 23 Apr 2024 - Don Baldrige  
**Test Package** : MOB 1

**SIMS METAL MANAGEMENT**  
 2500 S. PAULINA  
 CHICAGO, IL  
 US 60608  
 Contact: RYAN WISE  
 ryan.wise@simsmm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: