



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[SPM700166 RENTALS]**

Machine Id  
**VOLVO L70H 624047**

Component  
**Left Final Drive**

Fluid  
**VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP425256	---	---
Sample Date		Client Info		03 Apr 2024	---	---
Machine Age	hrs	Client Info		2822	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1000	46	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	1	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>30	10	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	16	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		11	---	---
Boron	ppm	ASTM D5185m		144	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		6	---	---
Magnesium	ppm	ASTM D5185m		7	---	---
Calcium	ppm	ASTM D5185m		4246	---	---
Phosphorus	ppm	ASTM D5185m		1419	---	---
Zinc	ppm	ASTM D5185m		1699	---	---
Sulfur	ppm	ASTM D5185m		5009	---	---
Visc @ 40°C	cSt	ASTM D445	55	42.0	---	---

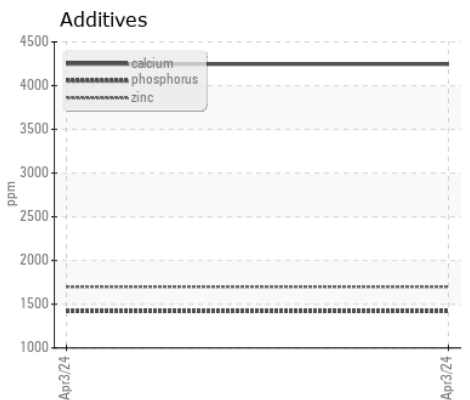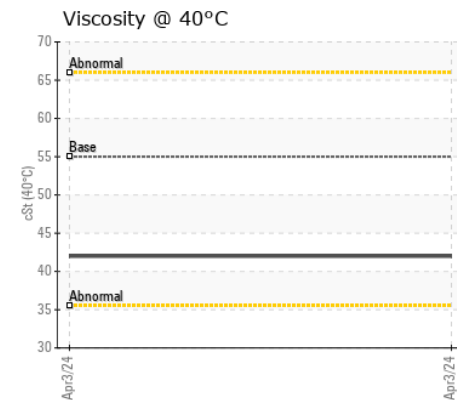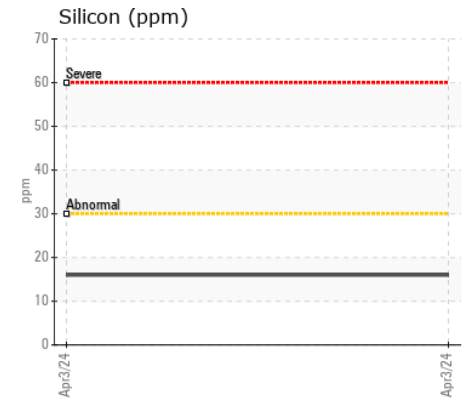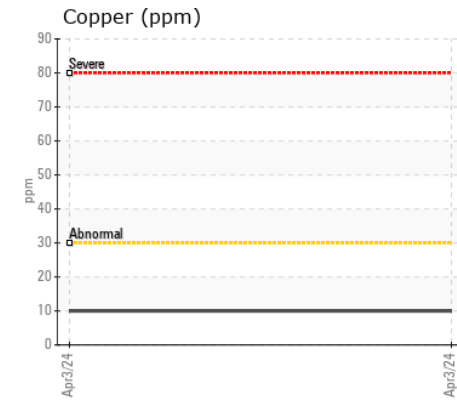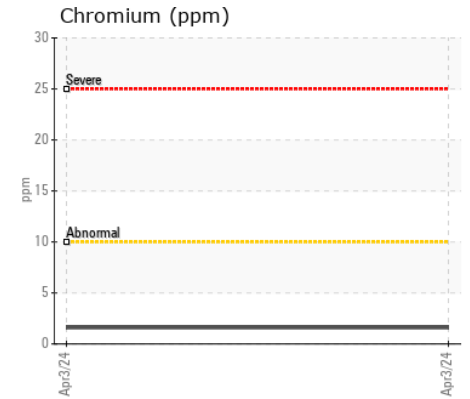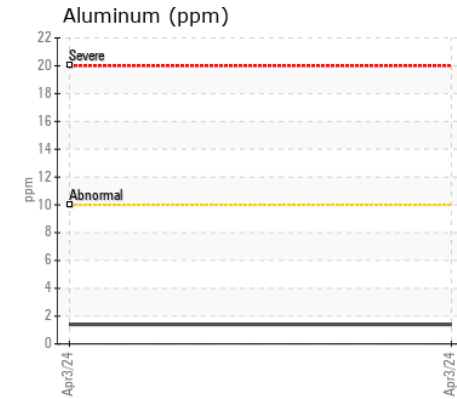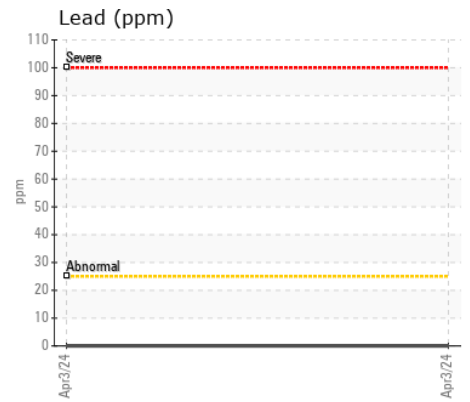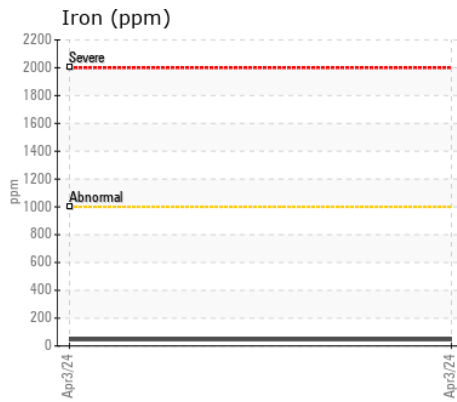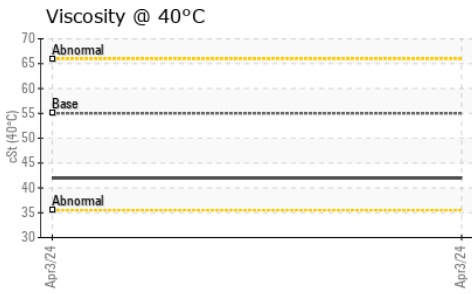

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : VCP425256  
 Lab Number : 06154877  
 Unique Number : 10990300  
 Test Package : MOB 1

Received : 19 Apr 2024  
 Tested : 22 Apr 2024  
 Diagnosed : 22 Apr 2024 - Wes Davis

**ALTA EQUIPMENT CO - ORLAND PARK**  
 5000 INDUSTRIAL HWY  
 GARY, IN  
 US 46406  
 Contact: DAVE ENG  
 DAVE.ENG@ALTG.COM  
 T: (312)350-2560  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)