



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[SPM687839 US STEEL]**

Machine Id  
**VOLVO A60H 340125**

Component  
**Bogie/Center Axle**

Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP436405</b>	VCP366813	---
Sample Date		Client Info		<b>12 Apr 2024</b>	27 Aug 2022	---
Machine Age	hrs	Client Info		<b>8696</b>	6235	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changed</b>	Changed	---
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>235</b>	69	---
Chromium	ppm	ASTM D5185m	>10	<b>6</b>	1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>5</b>	3	---
Boron	ppm	ASTM D5185m	400	<b>252</b>	266	---
Barium	ppm	ASTM D5185m	200	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>7</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>11</b>	2	---
Magnesium	ppm	ASTM D5185m	12	<b>0</b>	<1	---
Calcium	ppm	ASTM D5185m	150	<b>61</b>	17	---
Phosphorus	ppm	ASTM D5185m	1650	<b>2335</b>	2132	---
Zinc	ppm	ASTM D5185m	125	<b>25</b>	8	---
Sulfur	ppm	ASTM D5185m	22500	<b>31000</b>	24340	---
Visc @ 40°C	cSt	ASTM D445	143	<b>47.2</b>	47.6	---

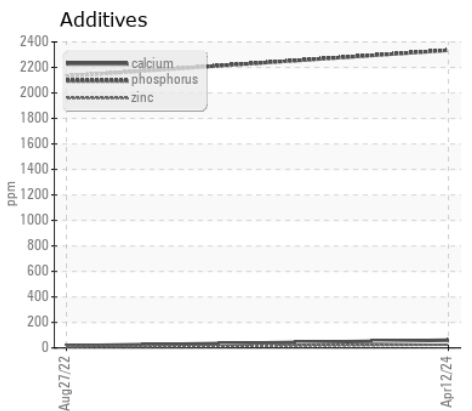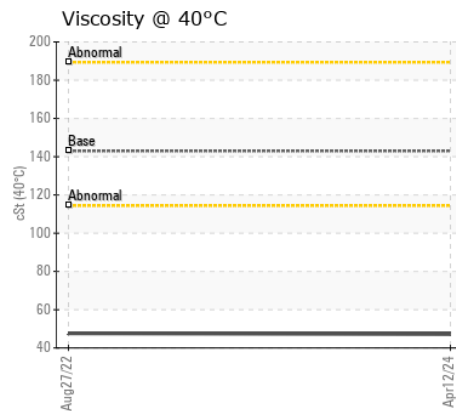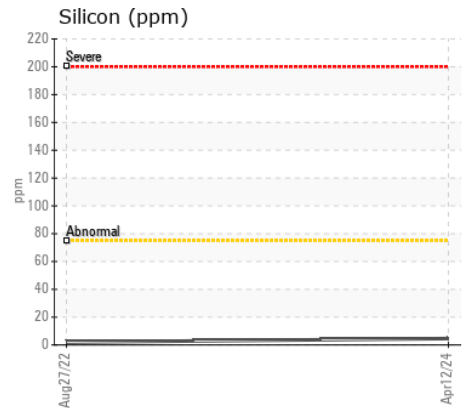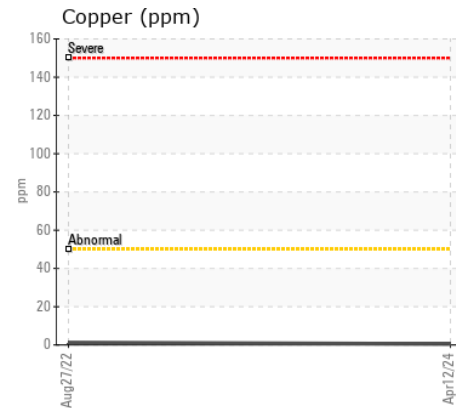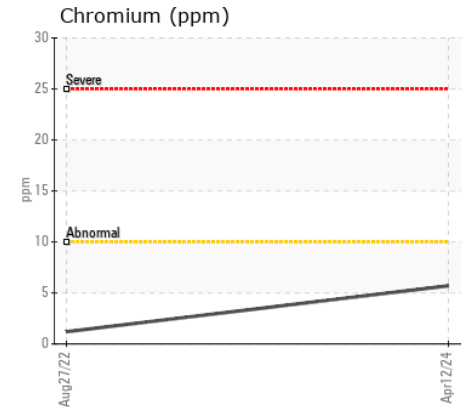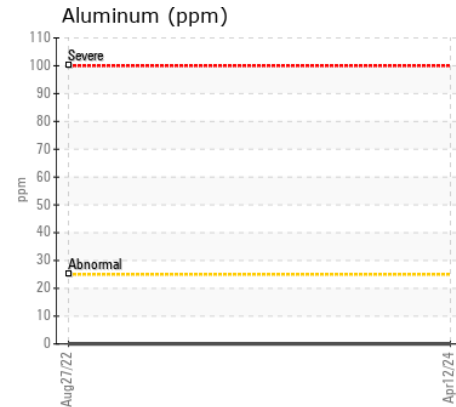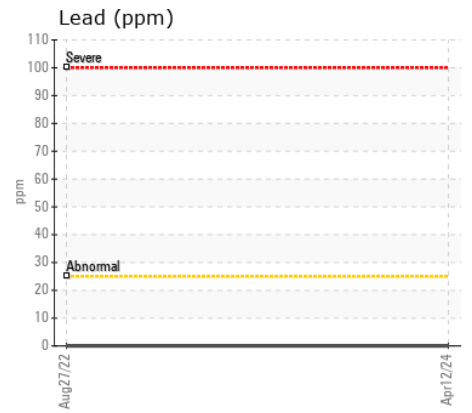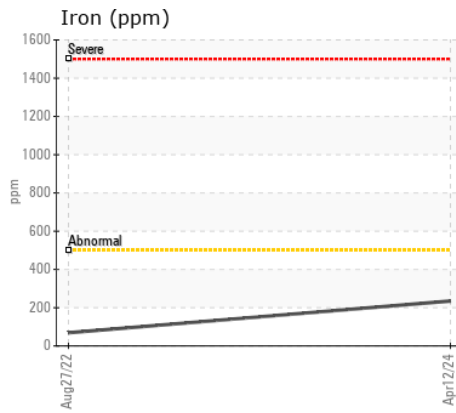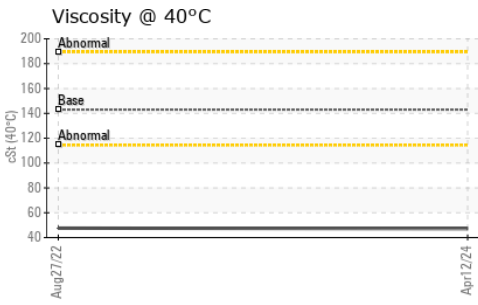

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP436405  
**Lab Number** : 06154886  
**Unique Number** : 10990309  
**Test Package** : MOB 1

**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 24 Apr 2024 - Sean Felton

**ALTA EQUIPMENT CO - ORLAND PARK**  
 5000 INDUSTRIAL HWY  
 GARY, IN  
 US 46406  
 Contact: DAVE ENG  
 DAVE.ENG@ALTG.COM  
 T: (312)350-2560  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)