



VOLVO

OIL ANALYSIS REPORT

| | |
|-----------------|-----------------|
| WEAR | ABNORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Area
[5127 ASH]
 Machine Id
VOLVO A60H 350269
 Component
Wet Disc Brake
 Fluid
VOLVO SUPER WET BRAKE TRANSAXLE OIL WB102 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | VCP413067 | --- | --- |
| Sample Date | | Client Info | | 04 Apr 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 4000 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

The copper level is abnormal. The iron level is abnormal.

| | | | | | | |
|--------------|--------|-------------|------|-------|-----|-----|
| Iron | ppm | ASTM D5185m | >20 | ▲ 54 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 1 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 1 | --- | --- |
| Lead | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >75 | ▲ 100 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION













Elemental level of silicon (Si) above normal indicating ingress of seal material.

| | | | | | | |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | ▲ 23 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|----|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 12 | --- | --- |
| Boron | ppm | ASTM D5185m | | 137 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 5 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 3946 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1341 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1585 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 4827 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | 55 | 41.9 | --- | --- |

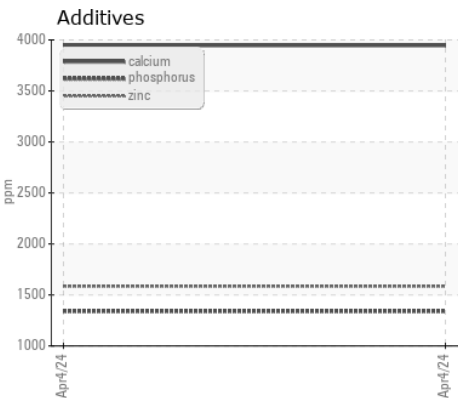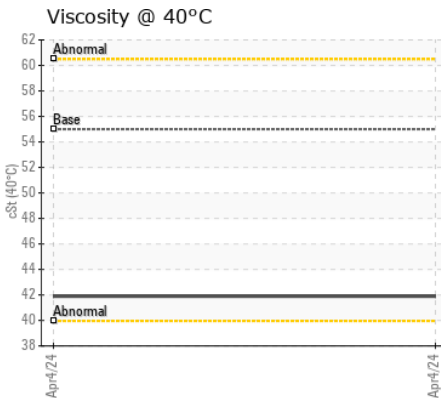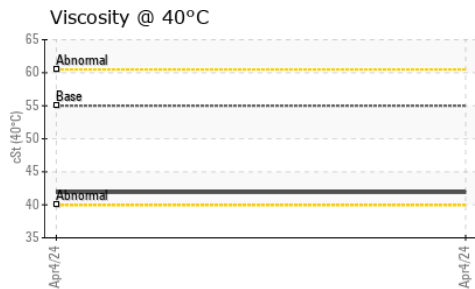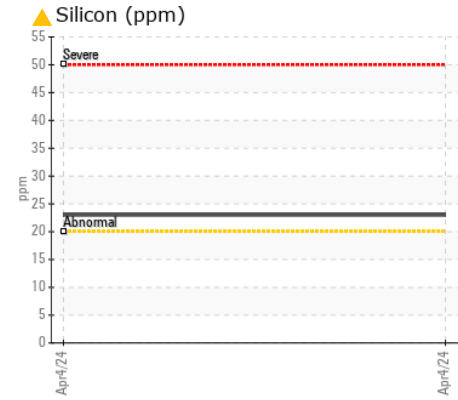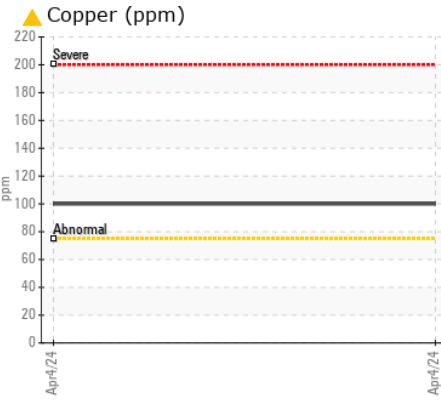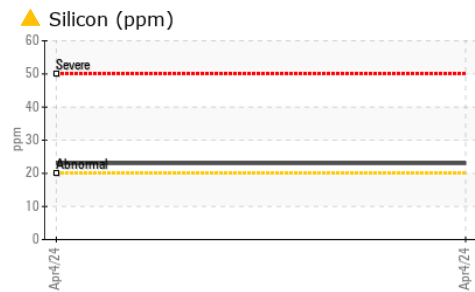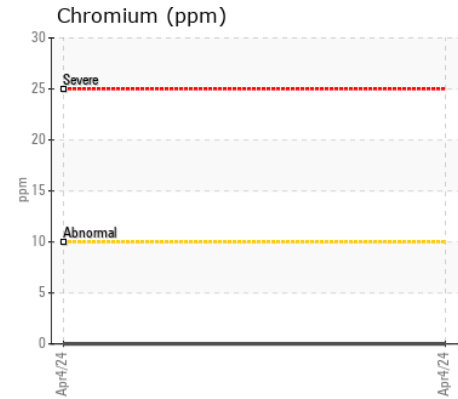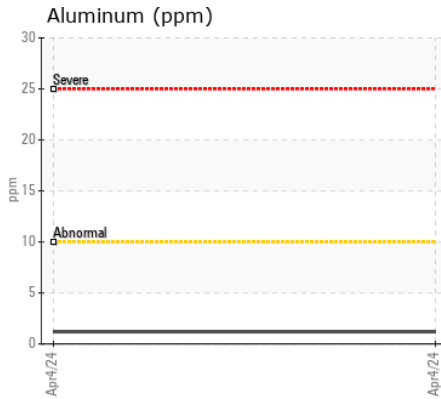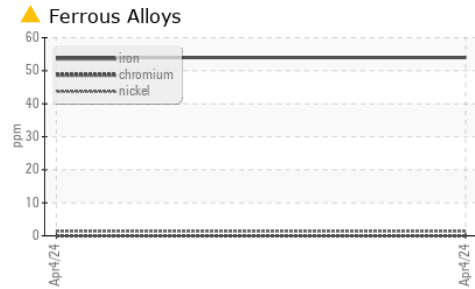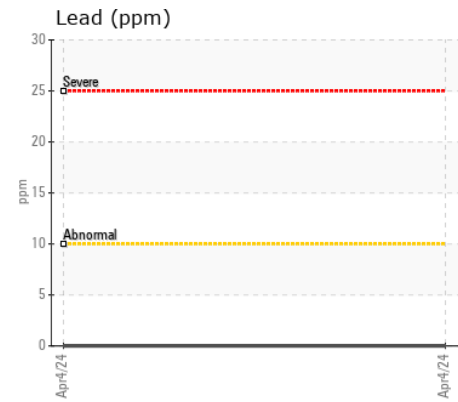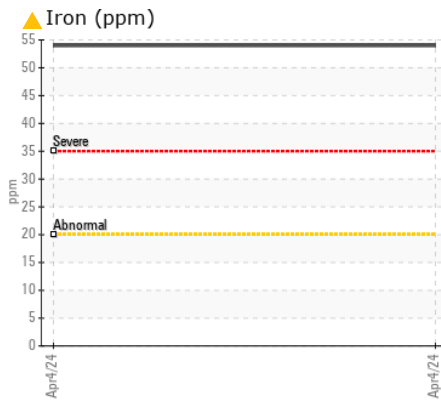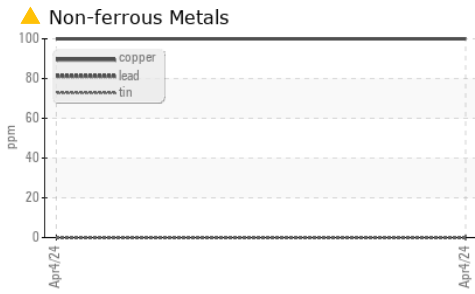

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP413067
Lab Number : 06154894
Unique Number : 10990317
Test Package : MOB 1

Received : 19 Apr 2024
Tested : 22 Apr 2024
Diagnosed : 24 Apr 2024 - Sean Felton

403 - ASCENDUM MACHINERY INC - FARGO
 3739 38TH ST SW, SUITE E
 FARGO, ND
 US 58104
 Contact: JESSE SCHEELE
 jesse.scheele@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (701)356-4072