



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[SPM700133]

Machine Id

SENNEBOGEN 825ME 825.0.3415

Component

Rear Right Final Drive

Fluid

GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP413906	VCP415072	VCP418526
Sample Date		Client Info		12 Apr 2024	25 Aug 2023	08 May 2023
Machine Age	hrs	Client Info		8667	7037	6085
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	111	18	29
Chromium	ppm	ASTM D5185m	>10	0	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	1	1	<1
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	40	4	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	20	14	18
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<1	4	2
Boron	ppm	ASTM D5185m	400	10	20	18
Barium	ppm	ASTM D5185m	200	1	<1	0
Molybdenum	ppm	ASTM D5185m	12	2	<1	1
Manganese	ppm	ASTM D5185m		3	2	3
Magnesium	ppm	ASTM D5185m	12	25	31	20
Calcium	ppm	ASTM D5185m	150	2219	2396	2351
Phosphorus	ppm	ASTM D5185m	1650	847	853	865
Zinc	ppm	ASTM D5185m	125	999	985	1016
Sulfur	ppm	ASTM D5185m	22500	6750	10791	9262
Visc @ 40°C	cSt	ASTM D445	143	196	174	171

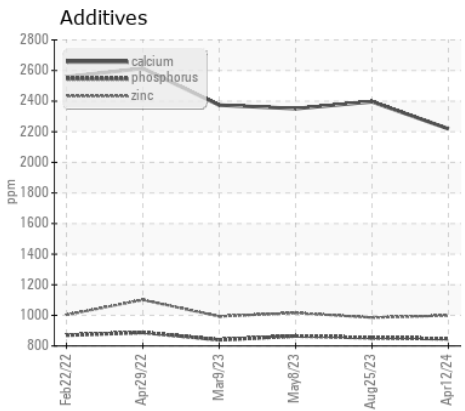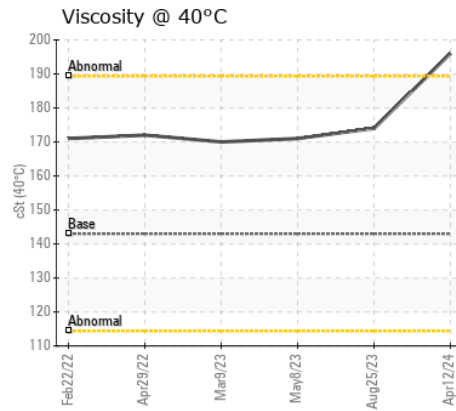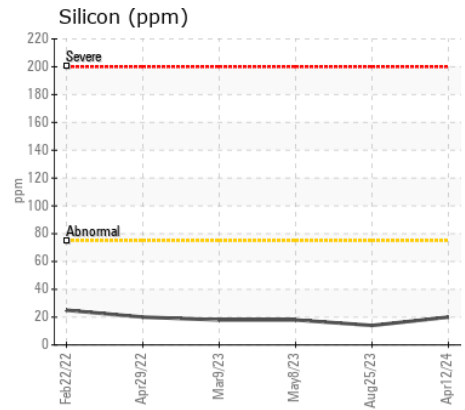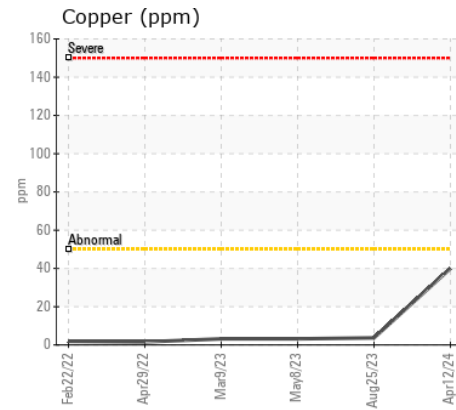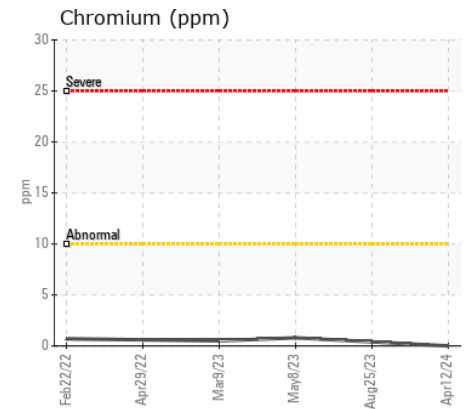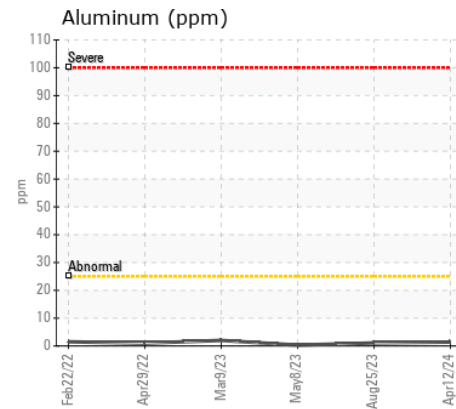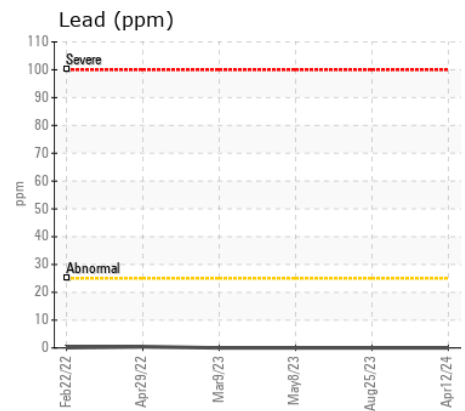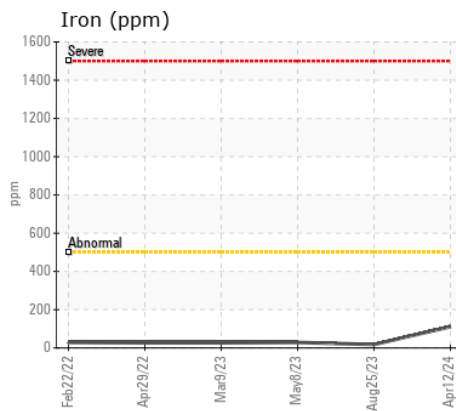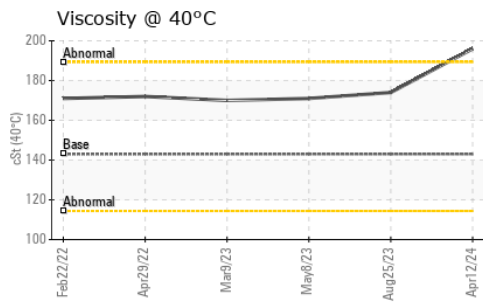

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP413906

Lab Number : 06154900

Unique Number : 10990323

Test Package : MOB 1

Received : 19 Apr 2024

Tested : 22 Apr 2024

Diagnosed : 24 Apr 2024 - Sean Felton

ALL AMERICAN RECYCLING

11900 S COTTAGE GROVE AVE

CHICAGO, IL

US 60628

Contact: TOM BOCHENEK

ferrous@aarecylcles.com

T: (815)735-9892

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)