



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(YA141269)

Machine Id

3514C

Component

Natural Gas Engine

Fluid

PETRO CANADA DURON GEO LD 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0109714	GFL0092683	GFL0072423
Sample Date		Client Info		17 Apr 2024	04 Jan 2024	08 Jun 2023
Machine Age	hrs	Client Info		0	45115	45115
Oil Age	hrs	Client Info		0	609	54115
Filter Age	hrs	Client Info		0	609	54115
Oil Changed		Client Info		N/A	Changed	Not Changd
Filter Changed		Client Info		N/A	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	17	13	48
Chromium	ppm	ASTM D5185m	>4	1	1	4
Nickel	ppm	ASTM D5185m	>2	<1	1	1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>9	3	2	8
Lead	ppm	ASTM D5185m	>30	<1	<1	4
Copper	ppm	ASTM D5185m	>35	36	33	33
Tin	ppm	ASTM D5185m	>4	<1	1	2
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>+100	5	5	9
Potassium	ppm	ASTM D5185m	>20	3	3	4
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	10.1	8.2	12.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	19.1	26.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	2	15
Boron	ppm	ASTM D5185m	50	3	7	9
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	50	67	60	66
Manganese	ppm	ASTM D5185m	0	<1	<1	2
Magnesium	ppm	ASTM D5185m	560	858	849	788
Calcium	ppm	ASTM D5185m	1510	1276	1231	1879
Phosphorus	ppm	ASTM D5185m	780	997	864	891
Zinc	ppm	ASTM D5185m	870	1196	1158	1282
Sulfur	ppm	ASTM D5185m	2040	3187	3136	3304
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	14.9	22.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	5.2	7.1	4.0
Visc @ 100°C	cSt	ASTM D445	15.1	14.1	14.0	14.7


FT-IR (Direct Trend)

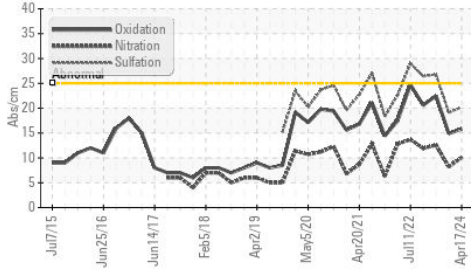


Base Number

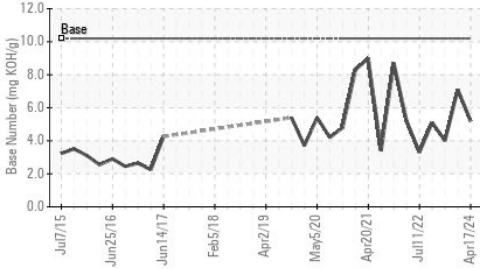


Viscosity @ 100°C

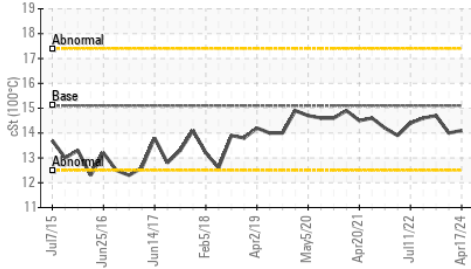


Ferrous Alloys

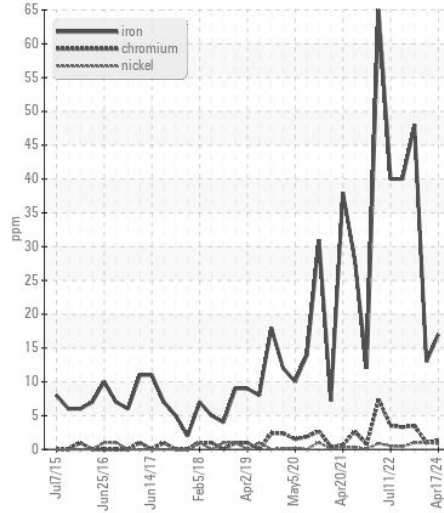


Non-ferrous Metals

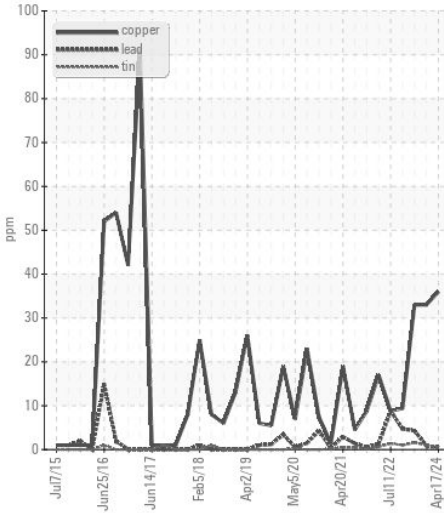

Viscosity @ 100°C

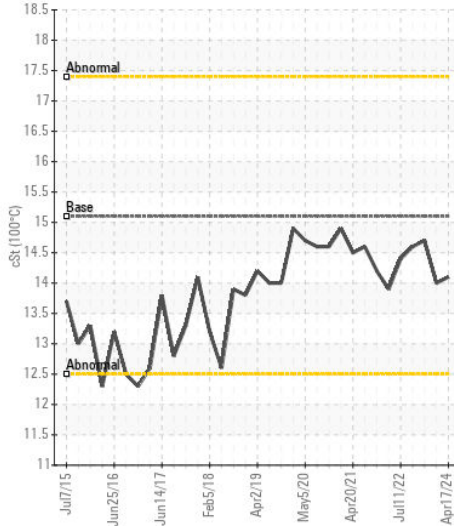

Base Number

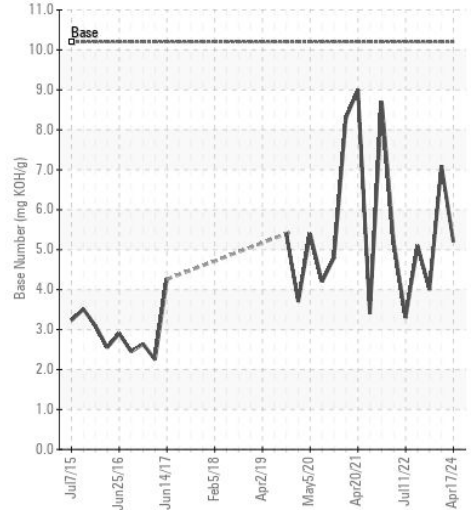

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109714 **Received** : 19 Apr 2024
Lab Number : 06155067 **Tested** : 24 Apr 2024
Unique Number : 10990490 **Diagnosed** : 24 Apr 2024 - Jonathan Hester
Test Package : FLEET

GFL Environmental - 005 - Wilson/Tri-East(CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)