

## Machine Id **5593** Component **Diesel Engine** Fluid **DIESEL ENGINE OIL SAE 40 (--- GAL)**

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.	Sample Number		Client Info		WC0883244	WC0883311	WC0796031
	Sample Date		Client Info		16 Apr 2024	28 Dec 2023	06 Jul 2023
	Machine Age	mls	Client Info		66978	58194	42950
	Oil Age	mls	Client Info		0	0	10000
	Filter Age	mls	Client Info		0	0	0
	Oil Changed		Client Info		Changed	Changed	Changed
	Filter Changed		Client Info		Changed	Changed	Changed
	Sample Status				NORMAL	NORMAL	NORMAL
WEAR Metal levels are typical for a new component breaking in.	Iron	ppm	ASTM D5185m		16	6	8
	Chromium	ppm	ASTM D5185m		<1	<1	<1
	Nickel	ppm	ASTM D5185m	>4	<1	0	0
	Titanium	ppm	ASTM D5185m		<1	0	<1
	Silver	ppm	ASTM D5185m		0	0	<1
	Aluminum	ppm	ASTM D5185m		11	5	6
	Lead	ppm	ASTM D5185m		<1	0	0
	Copper	ppm	ASTM D5185m		2	2	2
	Tin	ppm	ASTM D5185m	>15	<1	<1	<1
	Vanadium	ppm	ASTM D5185m		0	0	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	6	3	3
CONTRIMINATION	Potassium	ppm	ASTM D5185m		10	2	8
There is no indication of any contamination in the oil.	Fuel	ppm	WC Method		<1.0	<1.0	<1.0
	Water		WC Method		NEG	NEG	NEG
	Glycol		WC Method	20.2	NEG	NEG	NEG
	Soot %	%	*ASTM D7844	~3	0.2	0.2	0.2
	Nitration	Abs/cm	*ASTM D7624	>20	7.0	6.7	6.8
	Sulfation	Abs/.1mm	*ASTM D7415		20.2	18.7	18.5
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
	Odor	scalar	*Visual	NORML	NORML	NORML	NORML
	Emulsified Water		*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>216	<1	1	0
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron	ppm	ASTM D5185m	250	289	4	7
	Barium	ppm	ASTM D5185m	10	0	0	<1
	Molybdenum	ppm	ASTM D5185m	100	83	75	63
	Manganese	ppm	ASTM D5185m		<1	<1	<1
	Magnesium	ppm	ASTM D5185m	450	564	962	918
	Calcium	ppm	ASTM D5185m	3000	1343	1073	1139
	Phosphorus	ppm	ASTM D5185m	1150	1113	1084	1010
	Zinc	ppm	ASTM D5185m	1350	1238	1214	1189
	Sulfur	ppm	ASTM D5185m	4250	3713	3315	3312
	Oxidation	Abs/.1mm	*ASTM D7414	>25	14.8	14.4	14.4
	D NI I (DN)	L/OLL/	LOTIL DOGO	0.5		07	0 7

Base Number (BN) mg KOH/g ASTM D2896 8.5

ASTM D445 14.4

Visc @ 100°C cSt

9.7


12.6

9.7

12.8

8.3

12.5

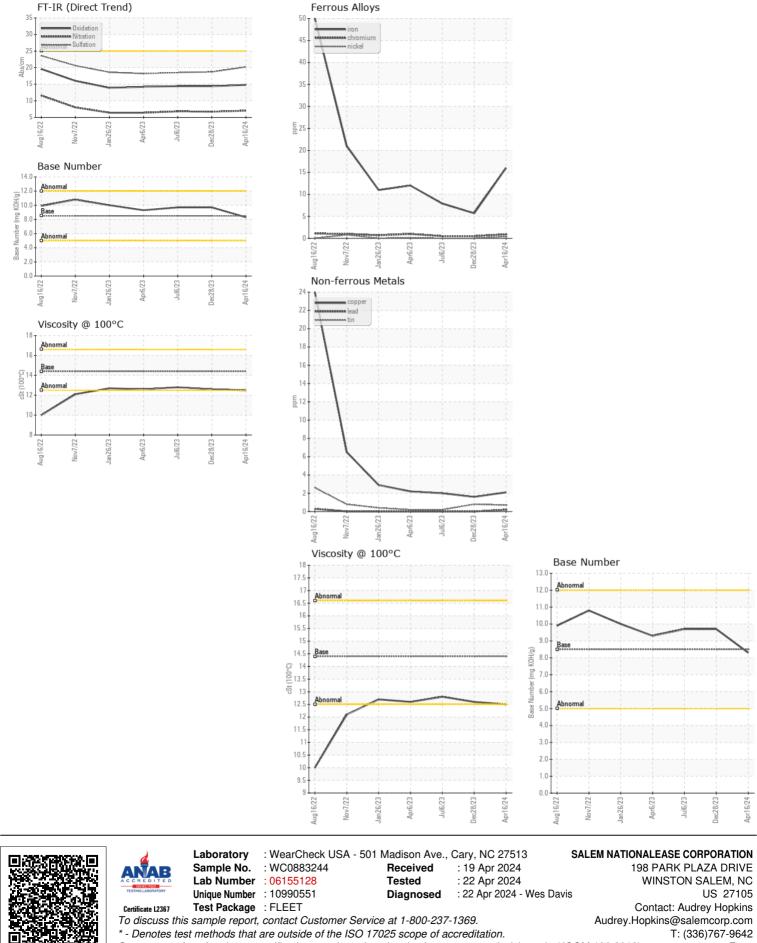

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Audrey Hopkins - SALWIN Page 2 of 2

F: x: