



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TL-6
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KFS0003994	KFS0003970	---
Sample Date		Client Info		15 Apr 2024	14 Jul 2023	---
Machine Age	hrs	Client Info		1537	1148	---
Oil Age	hrs	Client Info		500	0	---
Filter Age	hrs	Client Info		500	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	29	25	---
Chromium	ppm	ASTM D5185m	>20	<1	0	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	5	---
Lead	ppm	ASTM D5185m	>40	0	0	---
Copper	ppm	ASTM D5185m	>330	39	8	---
Tin	ppm	ASTM D5185m	>15	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	14	---
Potassium	ppm	ASTM D5185m	>20	4	10	---
Fuel		WC Method	>5	<1.0	<1.0	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	8.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.9	18.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	4	---
Boron	ppm	ASTM D5185m		<1	4	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		64	62	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		890	878	---
Calcium	ppm	ASTM D5185m		1083	1333	---
Phosphorus	ppm	ASTM D5185m		997	979	---
Zinc	ppm	ASTM D5185m		1178	1217	---
Sulfur	ppm	ASTM D5185m		2949	3583	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.8	14.9	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	8.69	10.13	---
Visc @ 100°C	cSt	ASTM D445	15.6	13.4	12.7	---

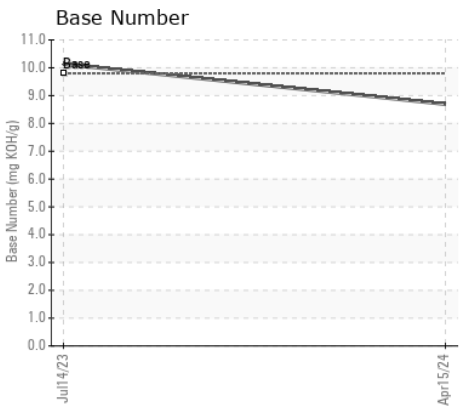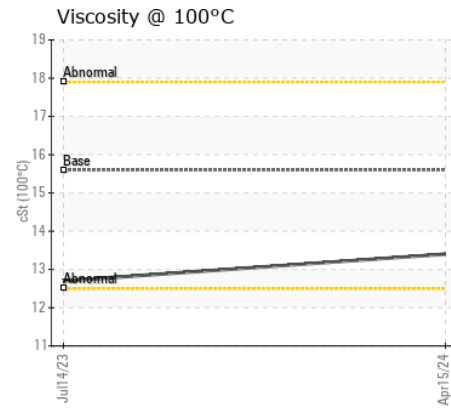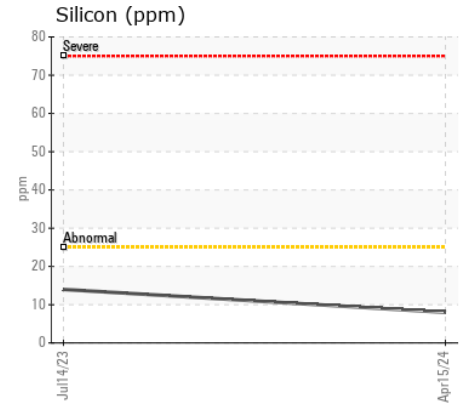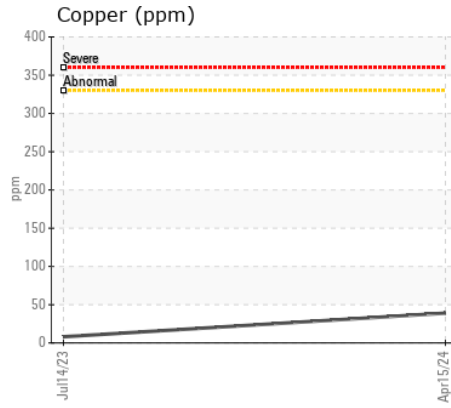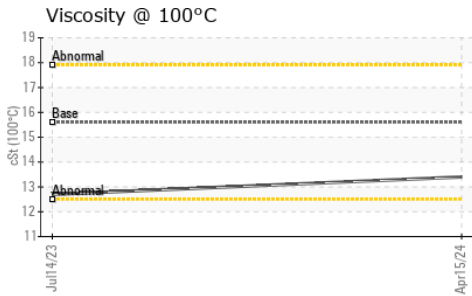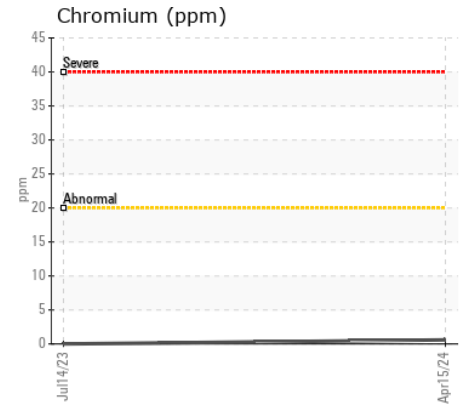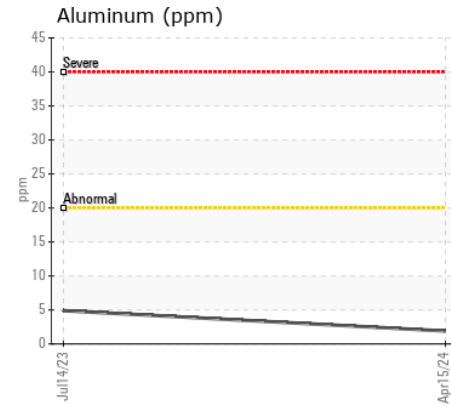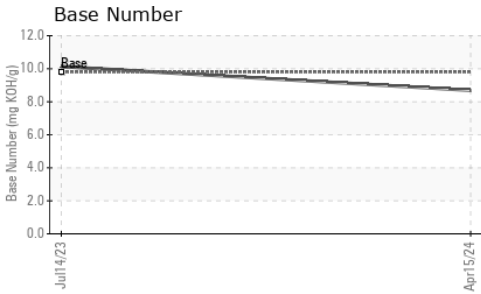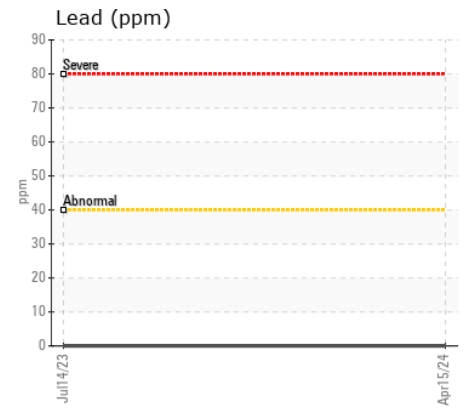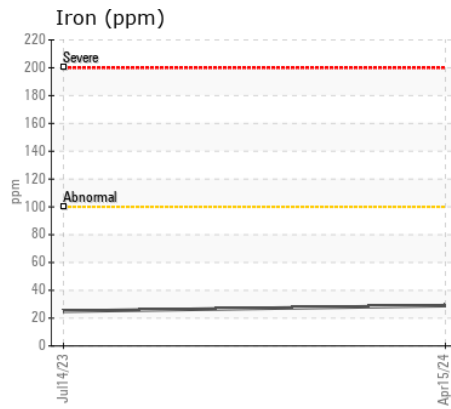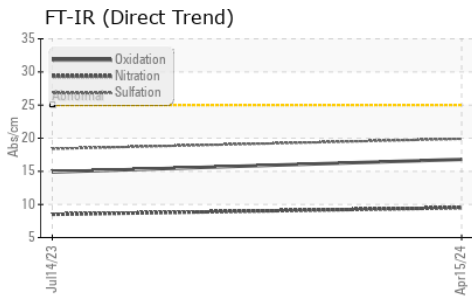

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KFS0003994 **Received** : 19 Apr 2024
Lab Number : 06155263 **Tested** : 22 Apr 2024
Unique Number : 10990686 **Diagnosed** : 22 Apr 2024 - Wes Davis
Test Package : MOB 2

HARNES LLLC
 855 N JAMES CAMPBELL BLVD
 COLUMBIA, TN
 US 38401
 Contact: BEN HARNES
 ben@slectharness.com
 T: (615)733-4480
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)