

Area  
**KEMP QUARRIES / RIVER VALLEY ARKOMA**  
Machine Id  
**WL152**  
Component  
**Front Differential**  
Fluid  
**PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0086966</b>	PCA0086343	---
Sample Date		Client Info		<b>15 Apr 2024</b>	13 Jun 2023	---
Machine Age	hrs	Client Info		<b>31696</b>	31129	---
Oil Age	hrs	Client Info		<b>51</b>	31129	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Chngd</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	<b>18</b>	129	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	3	---
Lead	ppm	ASTM D5185m	>25	<b>2</b>	14	---
Copper	ppm	ASTM D5185m	>100	<b>19</b>	▲ 152	---
Tin	ppm	ASTM D5185m	>10	<b>1</b>	▲ 12	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>10</b>	17	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	1	---
Boron	ppm	ASTM D5185m	2	<b>0</b>	3	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	---
Magnesium	ppm	ASTM D5185m	9	<b>17</b>	19	---
Calcium	ppm	ASTM D5185m	3114	<b>3332</b>	3321	---
Phosphorus	ppm	ASTM D5185m	1099	<b>836</b>	1082	---
Zinc	ppm	ASTM D5185m	1245	<b>1000</b>	1273	---
Sulfur	ppm	ASTM D5185m	7086	<b>4358</b>	8317	---
Visc @ 40°C	cSt	ASTM D445	213.9	<b>181</b>	● 92.4	---

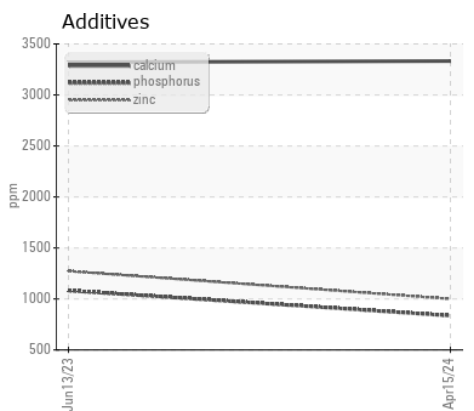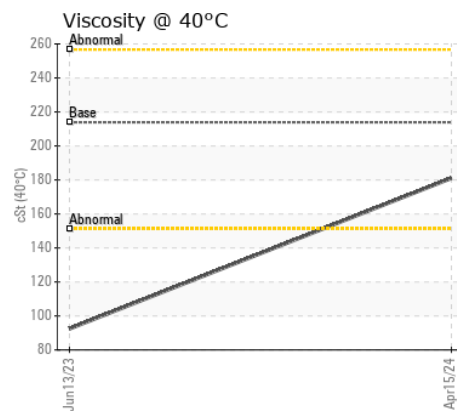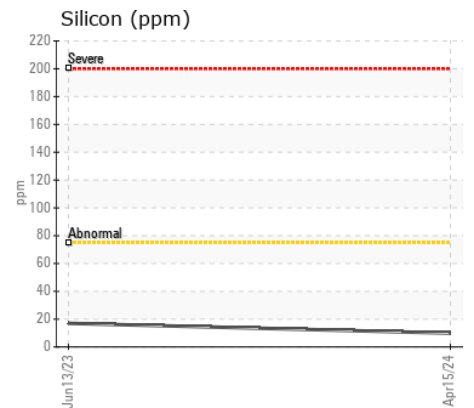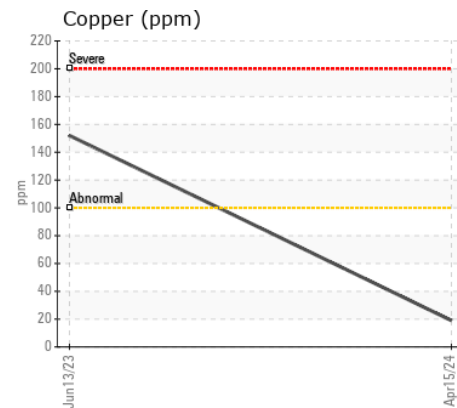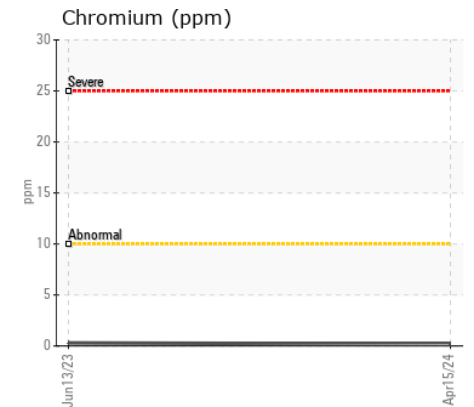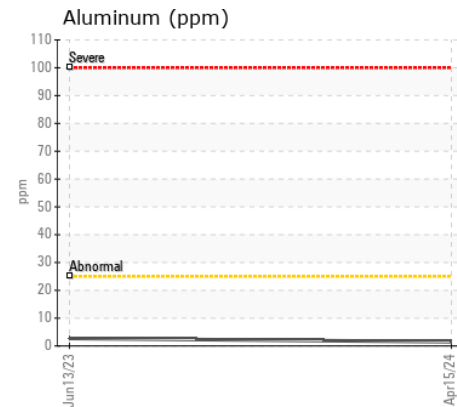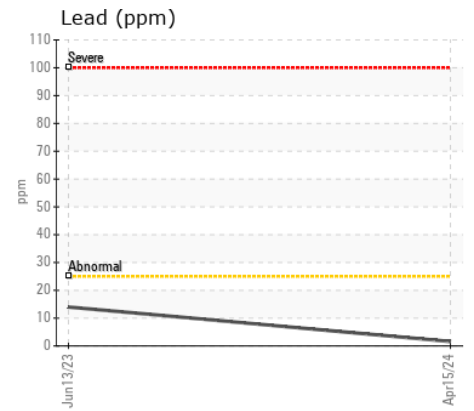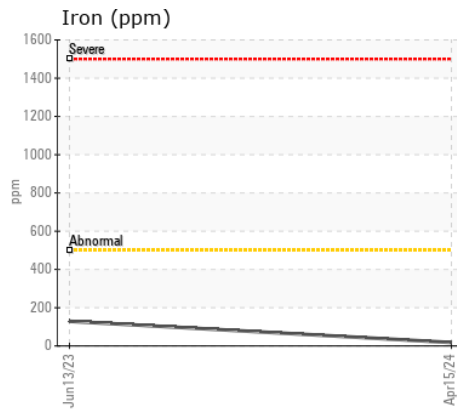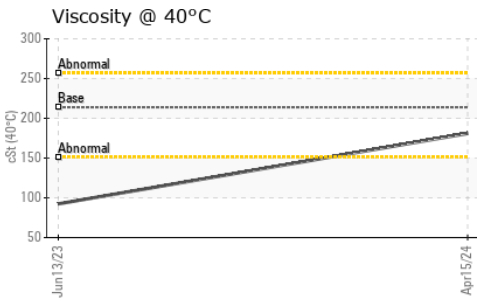

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086966  
**Lab Number** : 06155367  
**Unique Number** : 10990790  
**Test Package** : MOB 1

**Received** : 19 Apr 2024  
**Tested** : 23 Apr 2024  
**Diagnosed** : 23 Apr 2024 - Wes Davis

**Kemp Quarries - River Valley - Arkoma**  
 12971 HWY 9a  
 Shawnee, OK  
 US 74804

Contact: arkomashop@kempquarries.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: