



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
KEMP QUARRIES / RIVER VALLEY OZARK

Machine Id
WL091

Component
Rear Right Final Drive

Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0086931	PCA0086187	PCA0034853
Sample Date		Client Info		16 Apr 2024	13 Jan 2023	23 Jan 2021
Machine Age	hrs	Client Info		25576	24686	23316
Oil Age	hrs	Client Info		184746	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	None	N/A
Sample Status				NORMAL	ABNORMAL	SEVERE

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	96	▲ 1285	▲ 2554
Chromium	ppm	ASTM D5185m	>10	<1	2	4
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	4	4
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	8	9
Lead	ppm	ASTM D5185m	>25	1	1	2
Copper	ppm	ASTM D5185m	>50	4	22	8
Tin	ppm	ASTM D5185m	>10	<1	2	2
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	LIGHT	NONE	▲ MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	16	69	72
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	4	4
Boron	ppm	ASTM D5185m		50	17	117
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		4	2	4
Manganese	ppm	ASTM D5185m		<1	10	18
Magnesium	ppm	ASTM D5185m		64	30	57
Calcium	ppm	ASTM D5185m		2822	3179	542
Phosphorus	ppm	ASTM D5185m		942	914	1028
Zinc	ppm	ASTM D5185m		1049	1178	265
Sulfur	ppm	ASTM D5185m		7548	7248	23944
Visc @ 40°C	cSt	ASTM D445	195	173	183	138

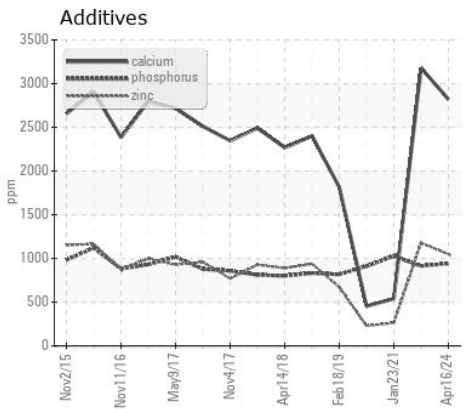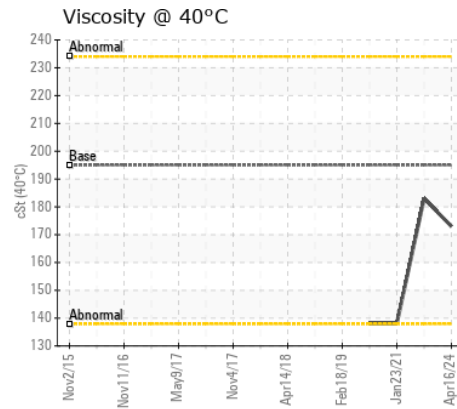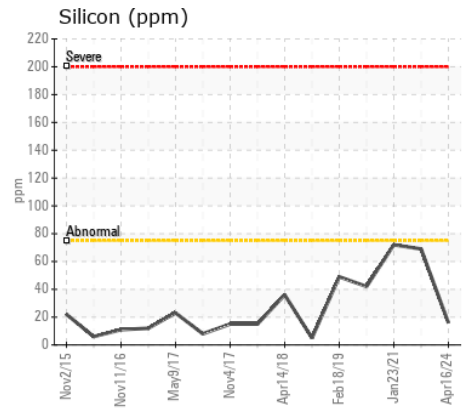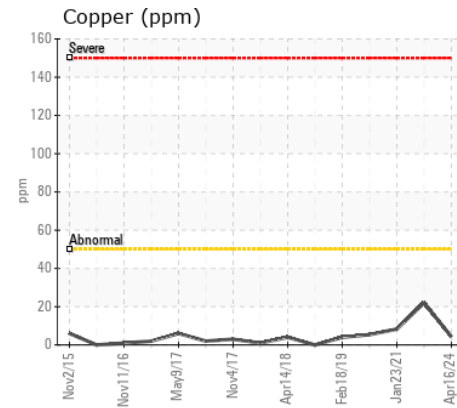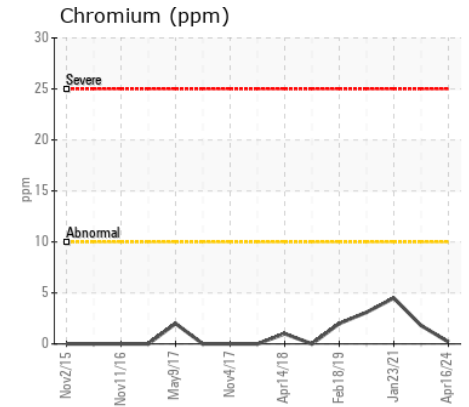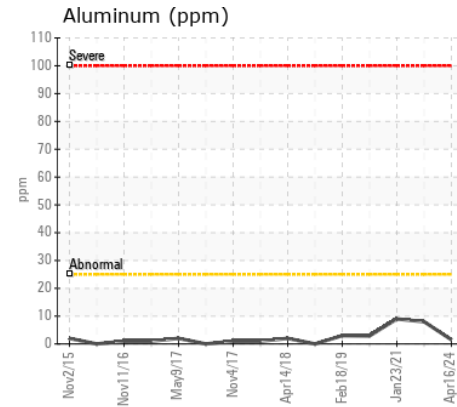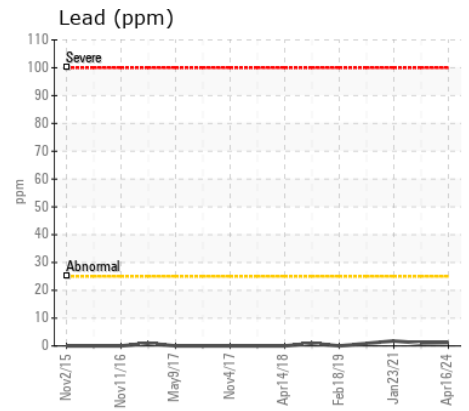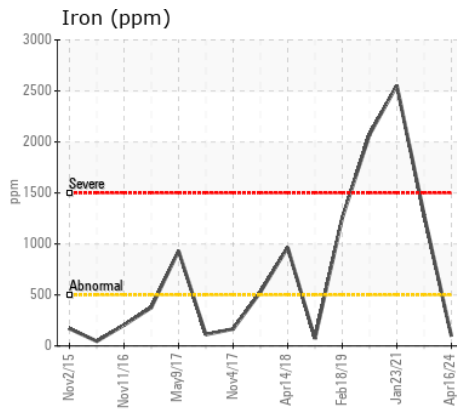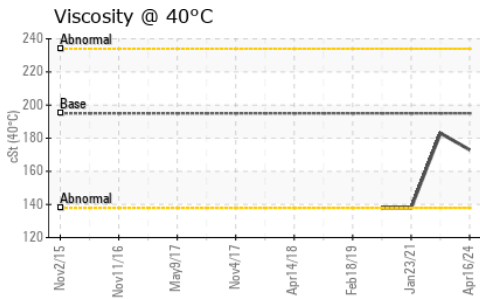

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086931
Lab Number : 06155370
Unique Number : 10990793
Test Package : MOB 1

Received : 19 Apr 2024
Tested : 24 Apr 2024
Diagnosed : 24 Apr 2024 - Jonathan Hester

Kemp Quarries - River Valley - Ozark
 9446 N Hwy 309
 Ozark, AR
 US 72949
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ozark@rivervalleyquarries.com

T:
F: