



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**KEMP QUARRIES / RIVER VALLEY ARKOMA**  
Machine Id  
**WL108**  
Component  
**Front Left Final Drive**  
Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0086972</b>	PCA0084372	PCA0084177
Sample Date		Client Info		<b>15 Apr 2024</b>	30 Jan 2024	29 Oct 2023
Machine Age	hrs	Client Info		<b>48071</b>	47663	47123
Oil Age	hrs	Client Info		<b>47123</b>	47123	45035
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	<b>20</b>	22	42
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>75	<b>&lt;1</b>	2	2
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>8	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	<b>12</b>	11	19
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	0	2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>0</b>	5	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>10</b>	9	18
Calcium	ppm	ASTM D5185m		<b>3524</b>	3418	3247
Phosphorus	ppm	ASTM D5185m		<b>918</b>	839	1052
Zinc	ppm	ASTM D5185m		<b>1103</b>	1050	1254
Sulfur	ppm	ASTM D5185m		<b>4925</b>	4570	4570
Visc @ 40°C	cSt	ASTM D445	195	<b>196</b>	194	179

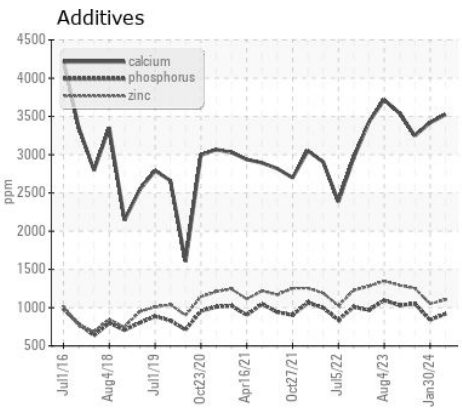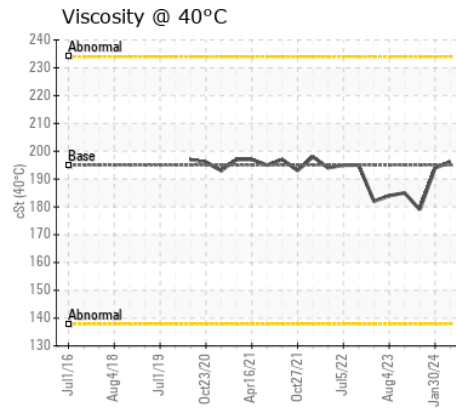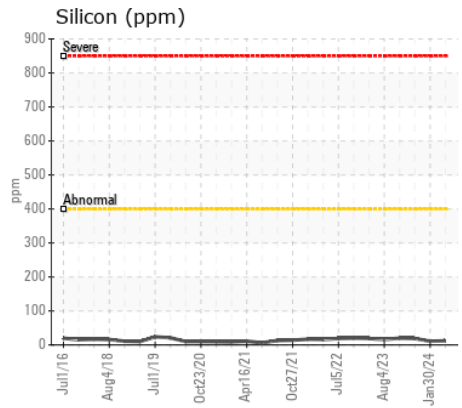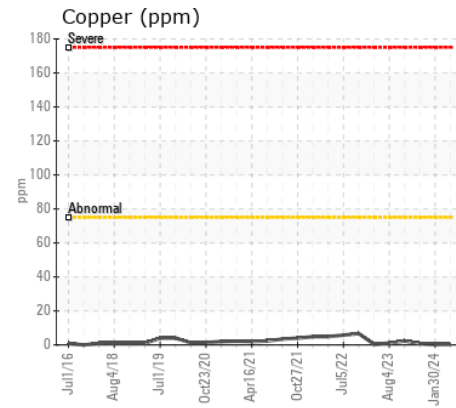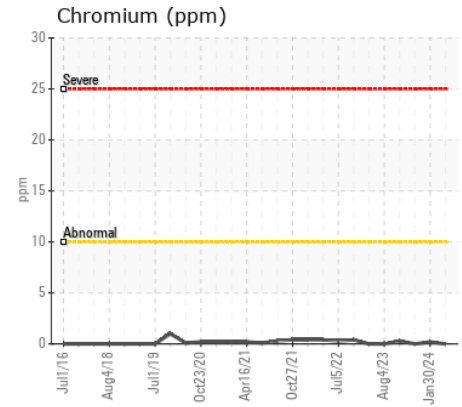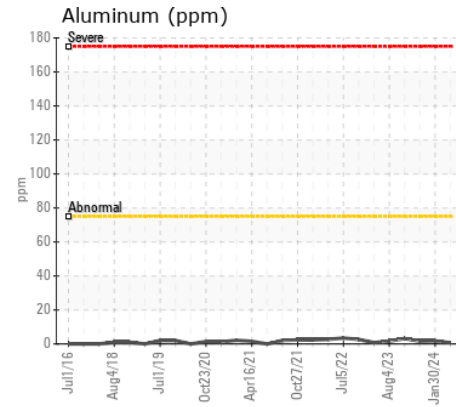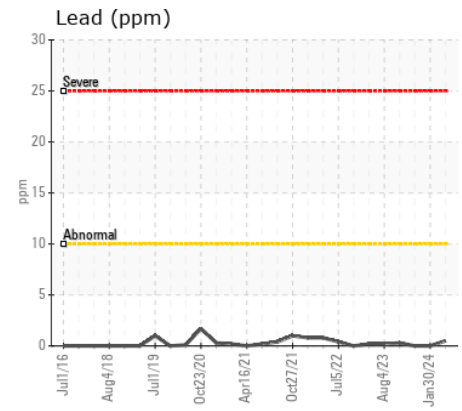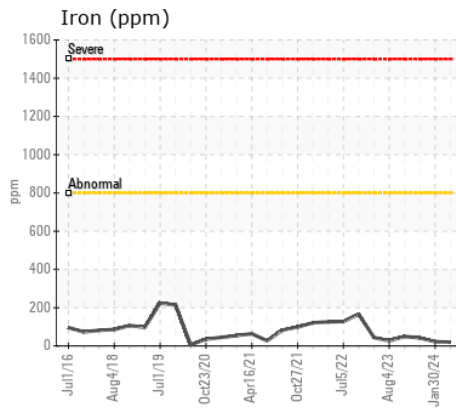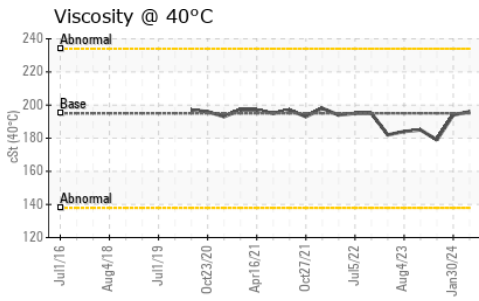

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0086972  
**Lab Number** : 06155378  
**Unique Number** : 10990801  
**Test Package** : MOB 1

**Received** : 19 Apr 2024  
**Tested** : 22 Apr 2024  
**Diagnosed** : 22 Apr 2024 - Wes Davis

**Kemp Quarries - River Valley - Arkoma**  
 12971 HWY 9a  
 Shawnee, OK  
 US 74804

Contact: arkomashop@kempquarries.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: