



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**13648**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0924517</b>	WC0846594	WC0846394
Sample Date		Client Info		<b>15 Apr 2024</b>	01 Dec 2023	31 Aug 2023
Machine Age	mls	Client Info		<b>52385</b>	45419	39202
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	ATTENTION	NORMAL

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	<b>16</b>	21	17
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>9</b>	9	7
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	6	2
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.9</b>	9.4	6.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	19.9	19.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	2	2
Boron	ppm	ASTM D5185m	250	<b>324</b>	71	308
Barium	ppm	ASTM D5185m	10	<b>2</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>76</b>	10	81
Manganese	ppm	ASTM D5185m		<b>1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>420</b>	632	374
Calcium	ppm	ASTM D5185m	3000	<b>1395</b>	1211	1327
Phosphorus	ppm	ASTM D5185m	1150	<b>982</b>	720	962
Zinc	ppm	ASTM D5185m	1350	<b>1201</b>	842	1185
Sulfur	ppm	ASTM D5185m	4250	<b>3471</b>	2918	3549
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	15.9	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.5</b>	5.5	5.7
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.8</b>	12.0	12.7

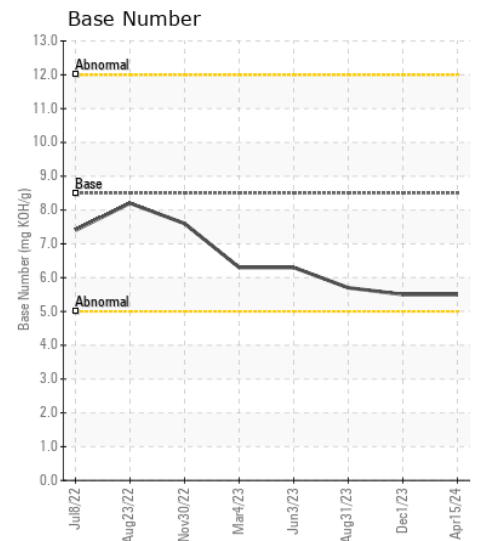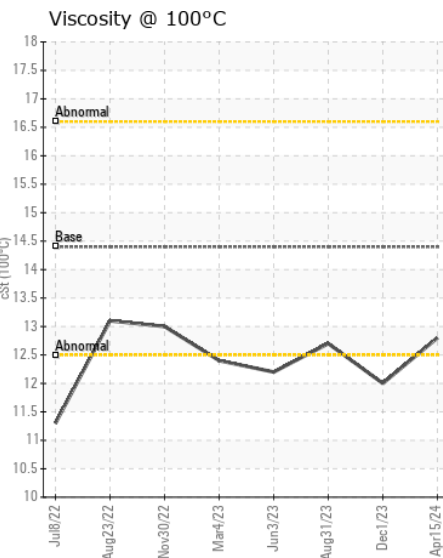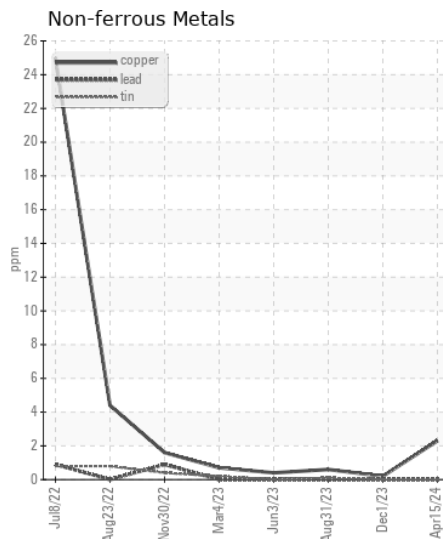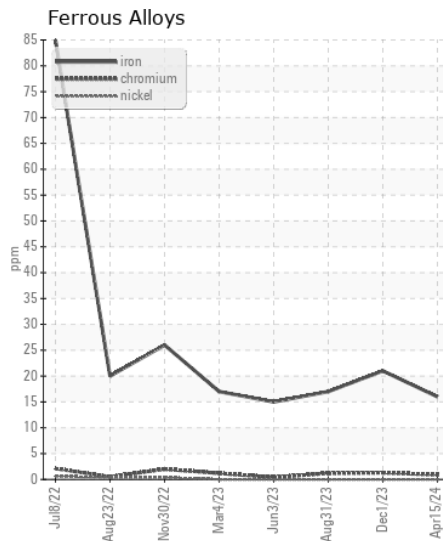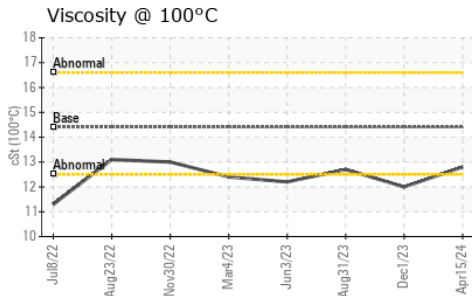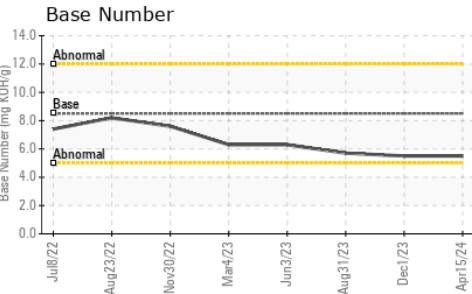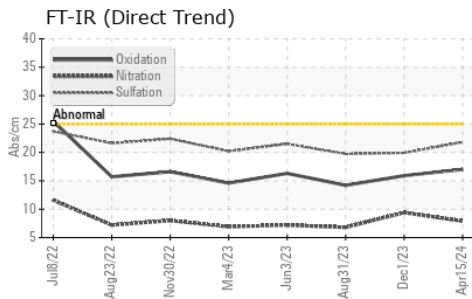

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0924517 **Received** : 22 Apr 2024  
**Lab Number** : 06155605 **Tested** : 23 Apr 2024  
**Unique Number** : 10991028 **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**SULLIVAN EASTERN INC**  
 2860 C SLATER RD  
 MORRISVILLE, NC  
 US 27560

Contact: SCOTT SULLIVAN  
 ssullivan@sullivaneastern.com

T: (919)484-8993

F: (919)484-2136