



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FORD 619 (S/N 1FAHPZMK6GG132189)

Component
Gasoline Engine

Fluid
PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0117712	PCA0117691	PCA0112893
Sample Date		Client Info		04 Apr 2024	12 Feb 2024	16 Nov 2023
Machine Age	mls	Client Info		64025	65594	59926
Oil Age	mls	Client Info		1431	5668	1415
Filter Age	mls	Client Info		1431	5668	1415
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	4	4	4
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>40	1	2	3
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>155	7	6	5
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	20	22	17
Potassium	ppm	ASTM D5185m	>20	<1	1	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.4	8.4	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.9	19.9	17.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	13	5	7
Boron	ppm	ASTM D5185m	183	77	38	61
Barium	ppm	ASTM D5185m	0	2	0	0
Molybdenum	ppm	ASTM D5185m	36	66	66	63
Manganese	ppm	ASTM D5185m	0	2	<1	<1
Magnesium	ppm	ASTM D5185m	417	614	607	519
Calcium	ppm	ASTM D5185m	1318	1237	1199	1116
Phosphorus	ppm	ASTM D5185m	773	748	763	716
Zinc	ppm	ASTM D5185m	845	863	913	824
Sulfur	ppm	ASTM D5185m	2690	3008	2640	2685
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	16.2	12.8
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	5.5	4.4	5.4
Visc @ 100°C	cSt	ASTM D445	8.42	9.2	9.1	8.6

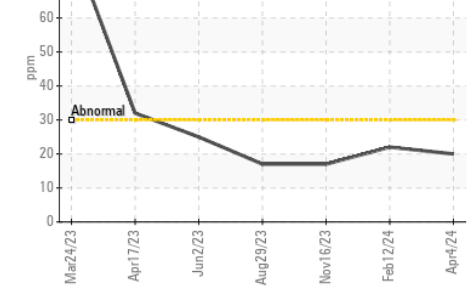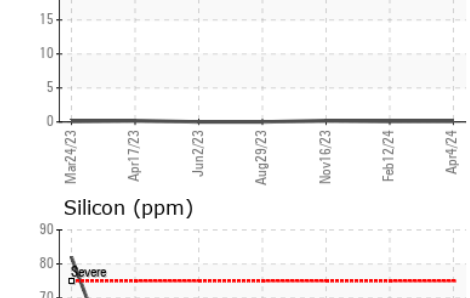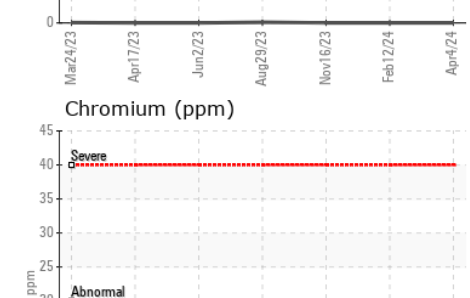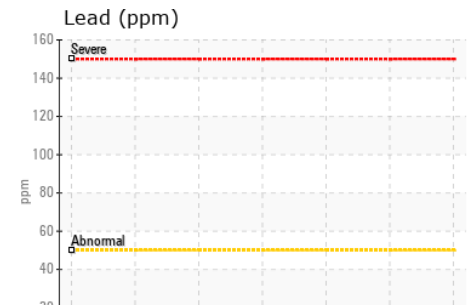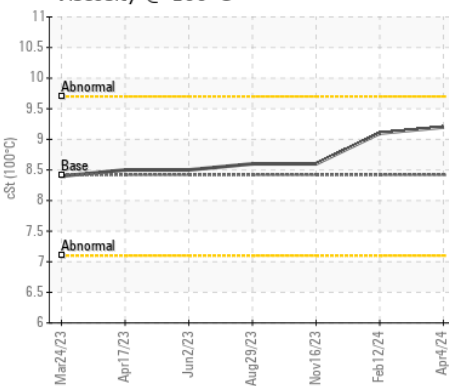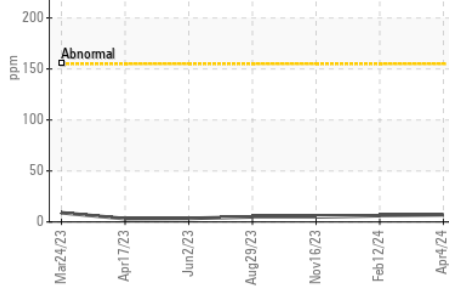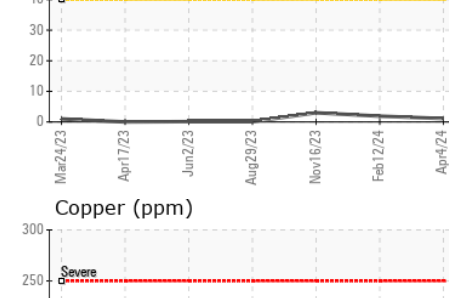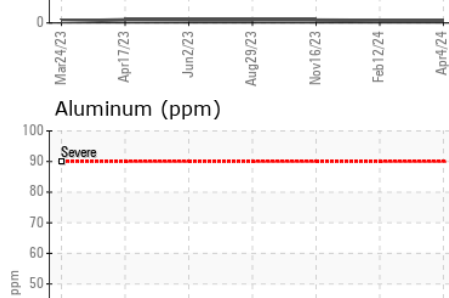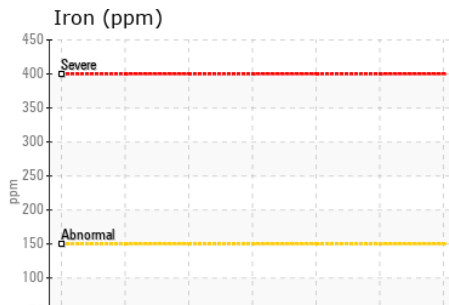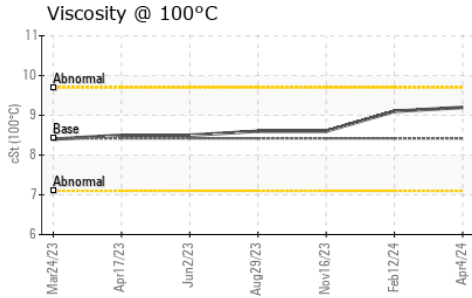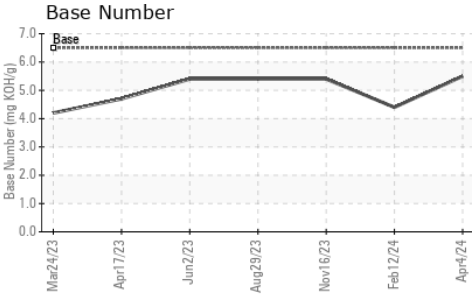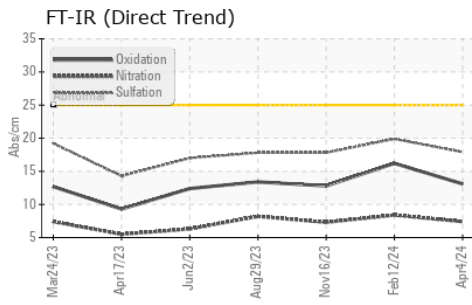

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0117712 **Received** : 22 Apr 2024
Lab Number : 06155613 **Tested** : 23 Apr 2024
Unique Number : 10991036 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: TBN)

VILLAGE OF NORTH RIVERSIDE
 2345 S DESPLAINES
 NORTH RIVERSIDE, IL
 US 60546
 Contact: Service Manager
 vznrdpw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: