

Machine Id  
**FORD 300 (S/N 1FM5K8D82GGC36046)**  
Component  
**Gasoline Engine**  
Fluid  
**PETRO CANADA SUPREME 5W20 MOTOR OIL (6 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0117719</b>	---	---
Sample Date		Client Info		<b>08 Apr 2024</b>	---	---
Machine Age	mls	Client Info		<b>52042</b>	---	---
Oil Age	mls	Client Info		<b>3680</b>	---	---
Filter Age	mls	Client Info		<b>3680</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>7</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>1</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>155	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>17</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844		<b>0</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	<b>14</b>	---	---
Boron	ppm	ASTM D5185m	183	<b>87</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m	36	<b>66</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	417	<b>591</b>	---	---
Calcium	ppm	ASTM D5185m	1318	<b>1199</b>	---	---
Phosphorus	ppm	ASTM D5185m	773	<b>762</b>	---	---
Zinc	ppm	ASTM D5185m	845	<b>844</b>	---	---
Sulfur	ppm	ASTM D5185m	2690	<b>3215</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.7</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	6.5	<b>4.1</b>	---	---
Visc @ 100°C	cSt	ASTM D445	8.42	<b>8.5</b>	---	---

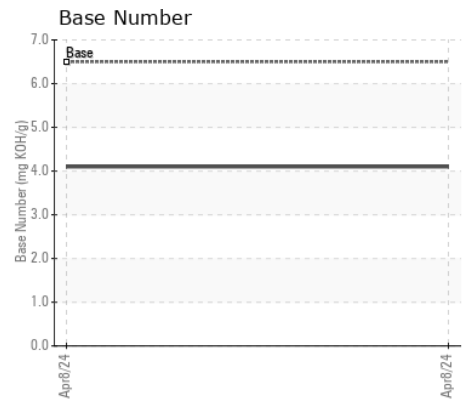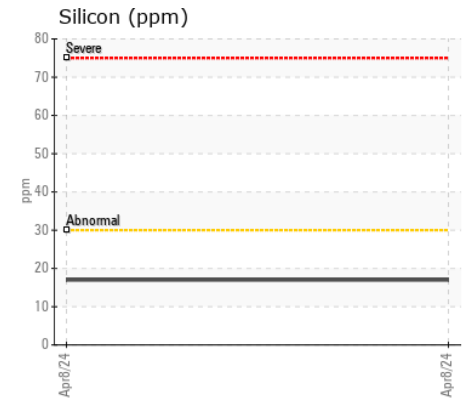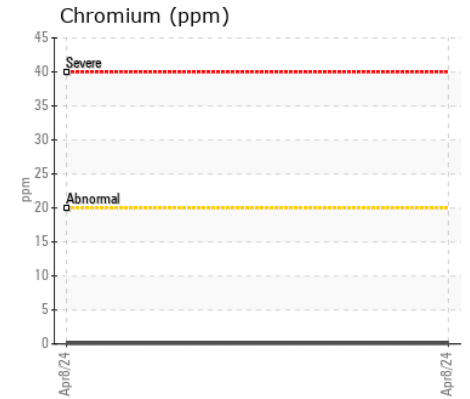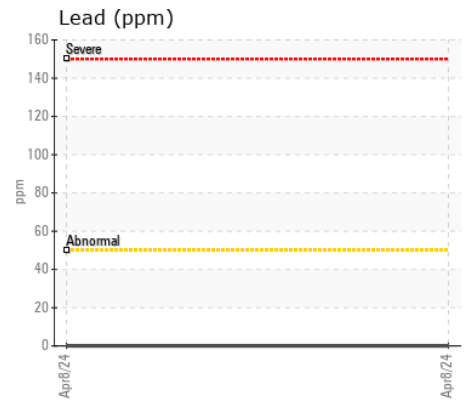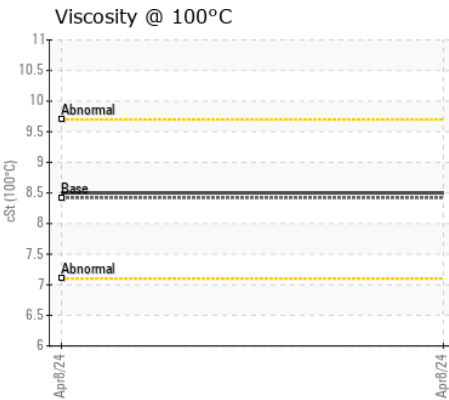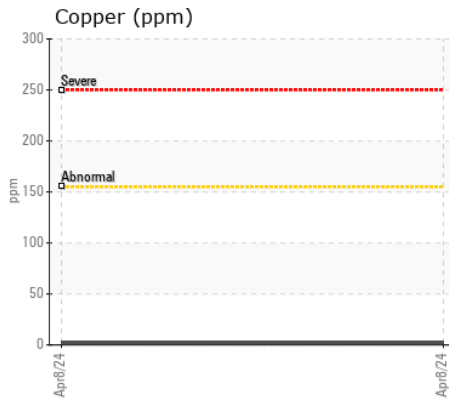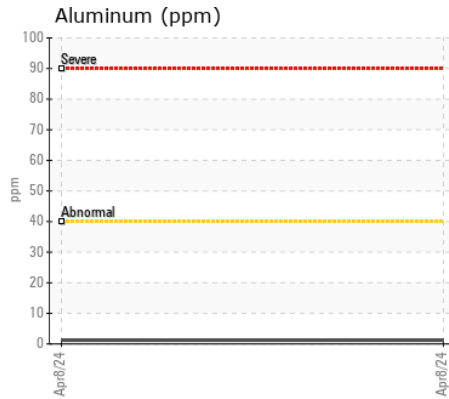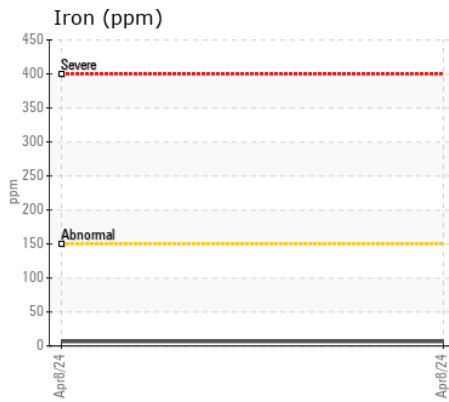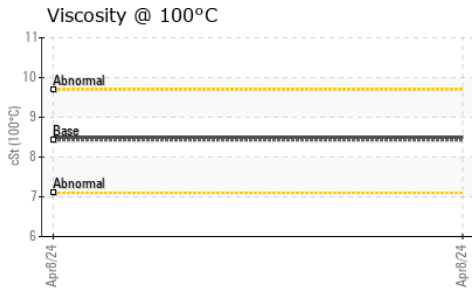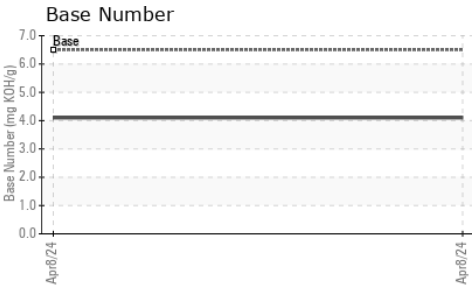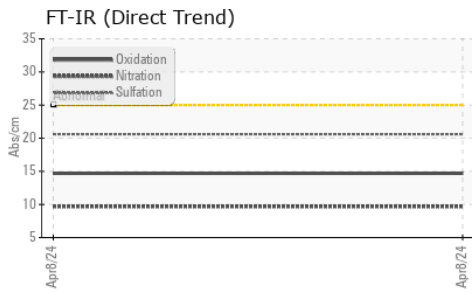

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117719 **Received** : 22 Apr 2024  
**Lab Number** : 06155614 **Tested** : 23 Apr 2024  
**Unique Number** : 10991037 **Diagnosed** : 23 Apr 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**VILLAGE OF NORTH RIVERSIDE**  
 2345 S DESPLAINES  
 NORTH RIVERSIDE, IL  
 US 60546  
 Contact: Service Manager  
 vznrpdw@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: