



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

(YA134204)

Machine Id

2672

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (32 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0109662	GFL0092732	GFL0092713
Sample Date		Client Info		21 Apr 2024	13 Dec 2023	03 Nov 2023
Machine Age	hrs	Client Info		0	17969	17969
Oil Age	hrs	Client Info		0	177	252
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Changed
Filter Changed		Client Info		N/A	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>165	12	2	15
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	<1	5
Lead	ppm	ASTM D5185m	>150	2	0	6
Copper	ppm	ASTM D5185m	>90	4	<1	1
Tin	ppm	ASTM D5185m	>5	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	6	4	6
Potassium	ppm	ASTM D5185m	>20	3	<1	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>7.5	0.3	0.1	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.1	7.3	8.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	18.9	20.6
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		8	1	2
Boron	ppm	ASTM D5185m	0	27	8	12
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	60	63	58	63
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	815	914	999
Calcium	ppm	ASTM D5185m	1070	1334	1073	1167
Phosphorus	ppm	ASTM D5185m	1150	1014	987	1088
Zinc	ppm	ASTM D5185m	1270	1187	1252	1369
Sulfur	ppm	ASTM D5185m	2060	3359	3015	3288
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	15.1	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.6	8.1	7.6
Visc @ 100°C	cSt	ASTM D445	15.4	13.7	13.5	14.0

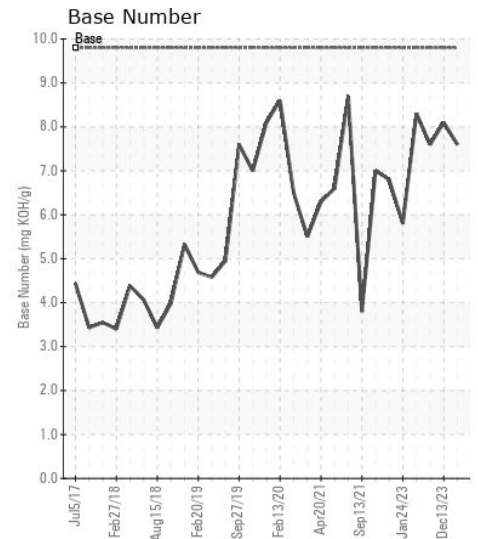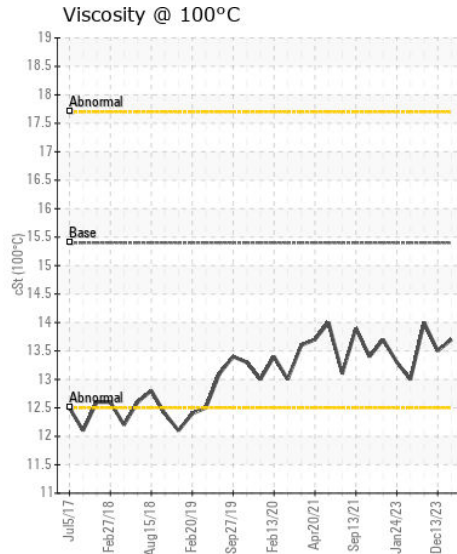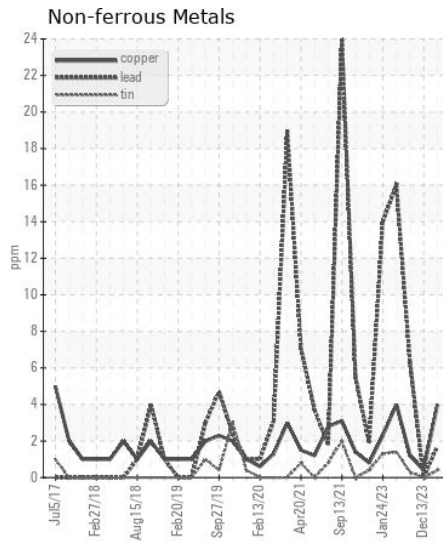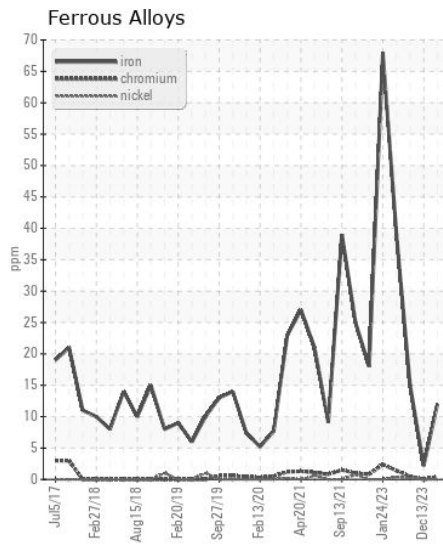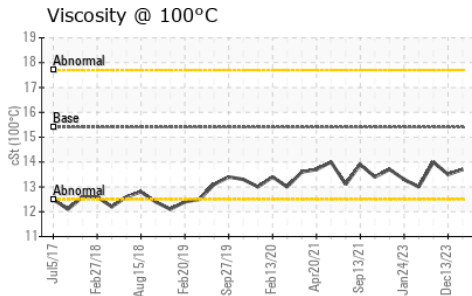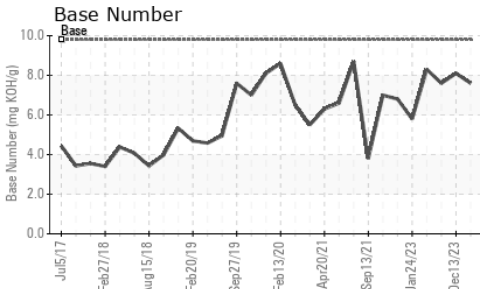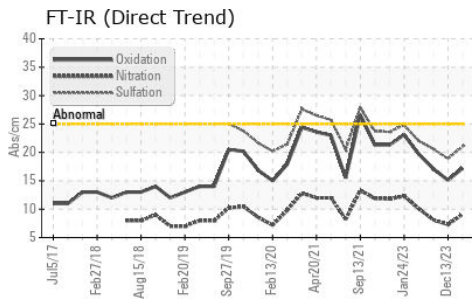

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0109662
Lab Number : 06155628
Unique Number : 10991051
Test Package : FLEET

Received : 22 Apr 2024
Tested : 23 Apr 2024
Diagnosed : 23 Apr 2024 - Wes Davis

GFL Environmental - 005 - Wilson/Tri-East(CNG)
 2810 Contentnea Road S
 Wilson, NC
 US 27893-8501
 Contact: SPENCER LIGGON
 spencer.liggon@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)