



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 2025R 1LV2025RCJJ104080
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (3 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189744	JR0135448	JR0093440
Sample Date		Client Info		17 Apr 2024	17 Jan 2023	08 Dec 2021
Machine Age	hrs	Client Info		470	303	265
Oil Age	hrs	Client Info		0	38	0
Filter Age	hrs	Client Info		0	38	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	6	4	6
Chromium	ppm	ASTM D5185m	>11	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>31	4	3	3
Lead	ppm	ASTM D5185m	>26	0	0	<1
Copper	ppm	ASTM D5185m	>26	4	1	1
Tin	ppm	ASTM D5185m	>4	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	9	9	10
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.1	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.3	6.6	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.1	19.3	20.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	1	2
Boron	ppm	ASTM D5185m		303	284	306
Barium	ppm	ASTM D5185m		2	<1	0
Molybdenum	ppm	ASTM D5185m		254	241	248
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		831	771	796
Calcium	ppm	ASTM D5185m		1474	1418	1321
Phosphorus	ppm	ASTM D5185m		916	833	862
Zinc	ppm	ASTM D5185m		1099	1044	1054
Sulfur	ppm	ASTM D5185m		3406	3466	2984
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.3	14.3	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.0	9.6	10.4
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	13.6	13.8


FT-IR (Direct Trend)

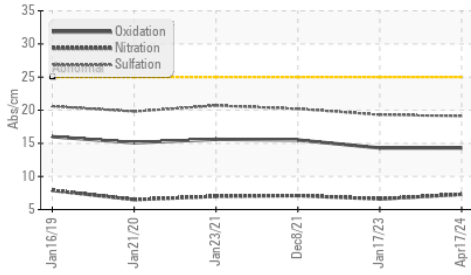


Ferrous Alloys

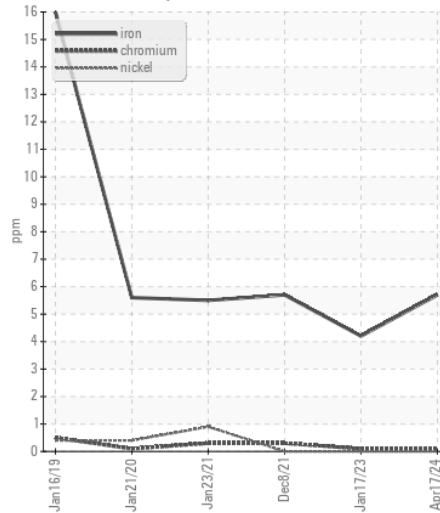


Base Number

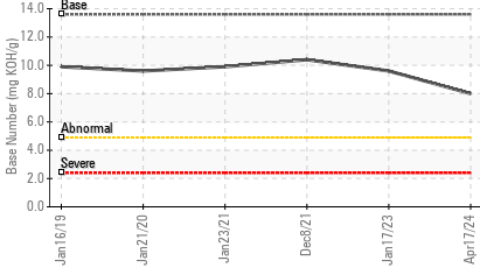


Non-ferrous Metals

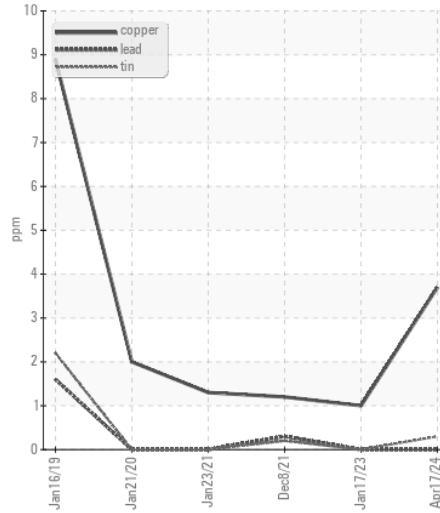


Viscosity @ 100°C

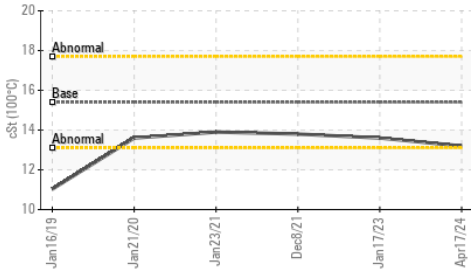

Viscosity @ 100°C

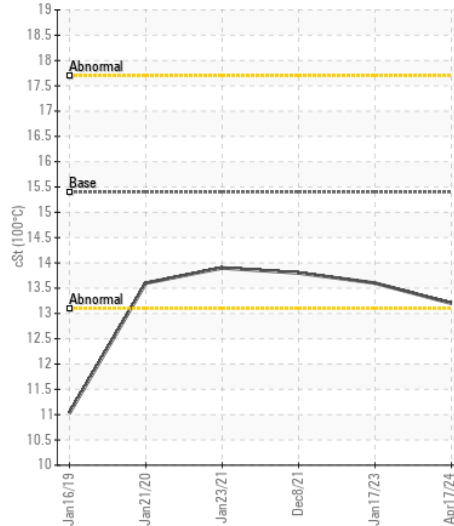

Base Number

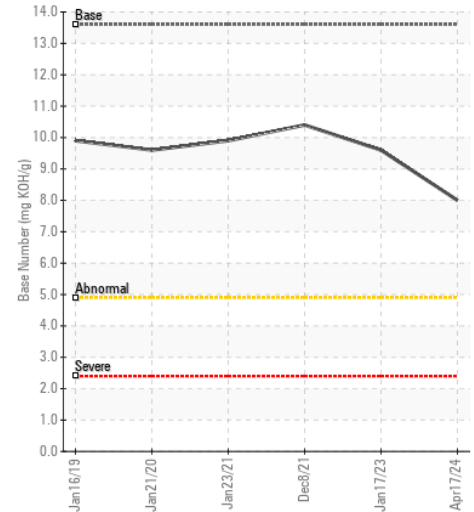

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189744 **Received** : 22 Apr 2024
Lab Number : 06155654 **Tested** : 23 Apr 2024
Unique Number : 10991077 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - LA CROSSE
 38431 HWY 58
 LA CROSSE, VA
 US 23950-1807
 Contact: HUNTER GREEN
 hgreen@jamesriverequipment.com
 T: (434)447-4325
 F: (434)447-1329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)