



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 370E 1DW370ETAHF680855
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0006944	WE0004366	---
Sample Date		Client Info		16 Apr 2024	05 Jul 2023	---
Machine Age	hrs	Client Info		6000	4986	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Chngd	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	14	16	---
Iron	ppm	ASTM D5185m	>71	6	9	---
Chromium	ppm	ASTM D5185m	>11	3	3	---
Nickel	ppm	ASTM D5185m	>6	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>11	2	1	---
Lead	ppm	ASTM D5185m	>13	0	<1	---
Copper	ppm	ASTM D5185m	>21	1	3	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>24	2	3	---
Potassium	ppm	ASTM D5185m	>20	0	1	---
Water		WC Method	>0.075	NEG	NEG	---
Particles >4µm		ASTM D7647	>80000	---	69922	---
Particles >6µm		ASTM D7647	>5000	---	▲ 19798	---
Particles >14µm		ASTM D7647	>640	---	▲ 1440	---
Particles >21µm		ASTM D7647	>160	---	● 317	---
Particles >38µm		ASTM D7647	>40	---	4	---
Particles >71µm		ASTM D7647	>10	---	0	---
Oil Cleanliness		ISO 4406 (c)	>23/19/16	---	▲ 23/21/18	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	▲ MODER	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<1	<1	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	<1	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		<1	0	---
Calcium	ppm	ASTM D5185m	87	81	86	---
Phosphorus	ppm	ASTM D5185m	727	495	558	---
Zinc	ppm	ASTM D5185m	900	648	780	---
Sulfur	ppm	ASTM D5185m	1500	1531	1651	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.57	0.70	---
Visc @ 40°C	cSt	ASTM D445	65	60.0	60.3	---

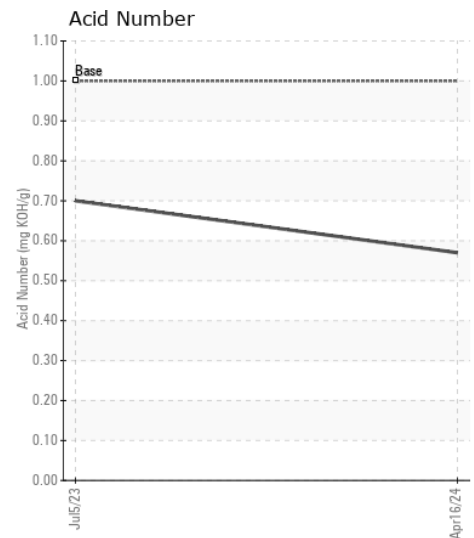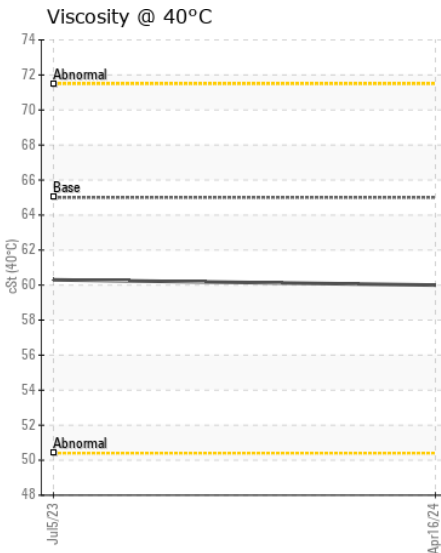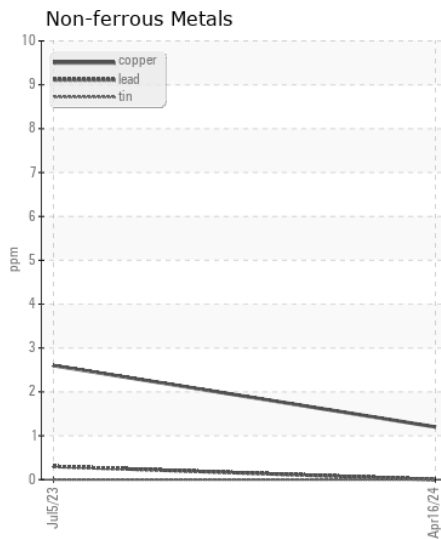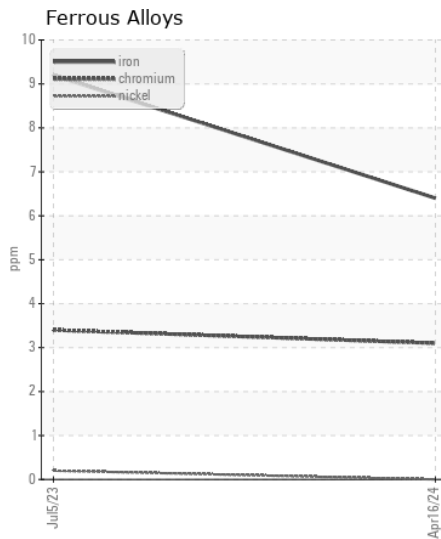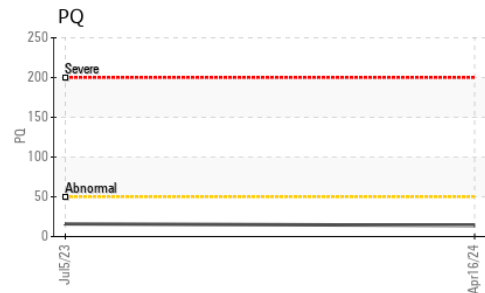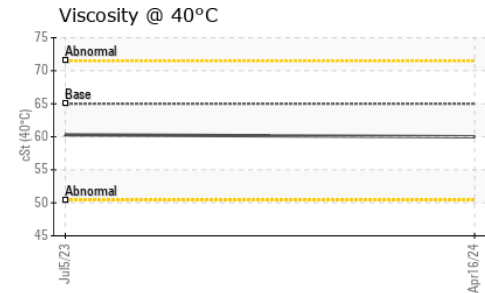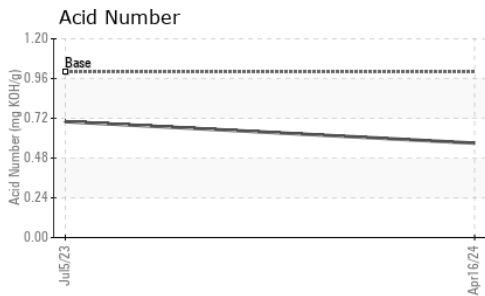

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0006944 **Received** : 22 Apr 2024
Lab Number : 06155808 **Tested** : 24 Apr 2024
Unique Number : 10991231 **Diagnosed** : 24 Apr 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: CRAIG ANDOE
 serve01@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)