



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 844L 1DW844LXCNL713519
 Component
Transmission (Manual)
 Fluid
JOHN DEERE HY-GARD HYD/TRANS LOW VIS (29 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0208960	JR0202208	JR0183206
Sample Date		Client Info		18 Apr 2024	17 Feb 2024	07 Dec 2023
Machine Age	hrs	Client Info		6015	5589	5038
Oil Age	hrs	Client Info		4478	4603	4481
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	17	15	17
Iron	ppm	ASTM D5185m	>200	58	52	49
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>7	0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	1	<1
Lead	ppm	ASTM D5185m	>45	0	<1	0
Copper	ppm	ASTM D5185m	>225	15	10	10
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	28	26	26
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	6	6
Boron	ppm	ASTM D5185m		0	<1	0
Barium	ppm	ASTM D5185m		2	0	<1
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		2	<1	<1
Magnesium	ppm	ASTM D5185m		89	71	91
Calcium	ppm	ASTM D5185m		3202	2957	3008
Phosphorus	ppm	ASTM D5185m		1022	972	859
Zinc	ppm	ASTM D5185m		1052	1103	1082
Sulfur	ppm	ASTM D5185m		3815	3316	3650
Visc @ 40°C	cSt	ASTM D445	32	46.8	46.5	46.4

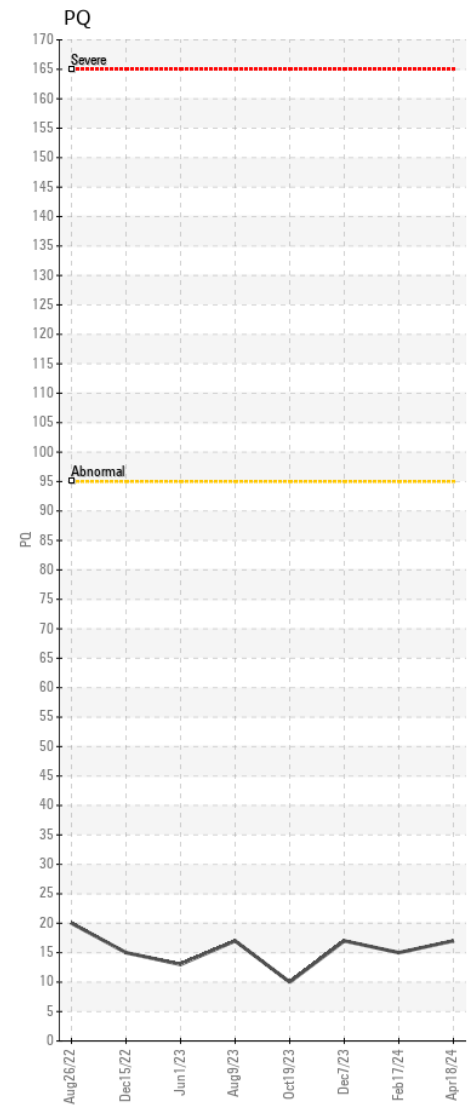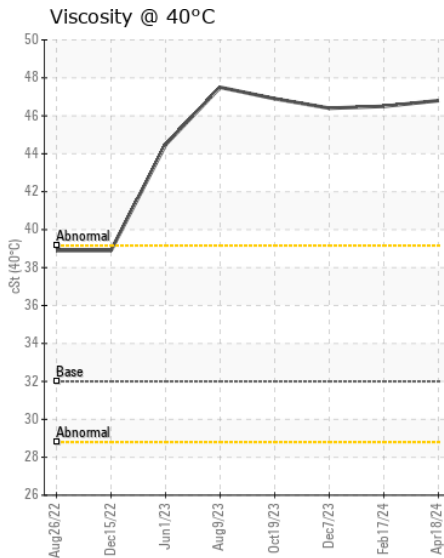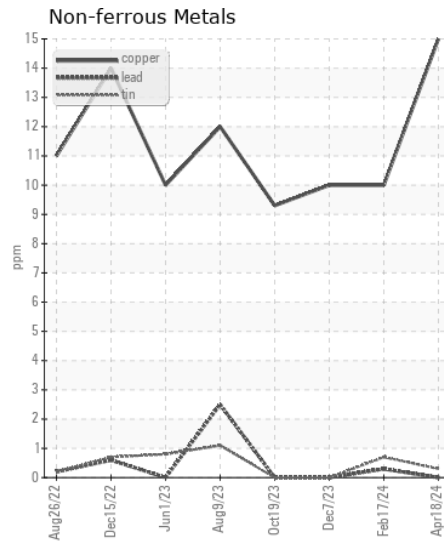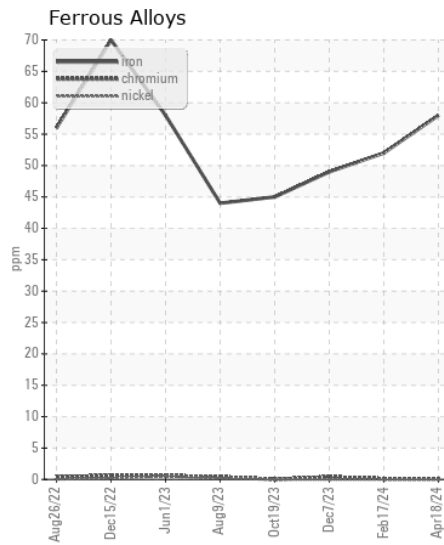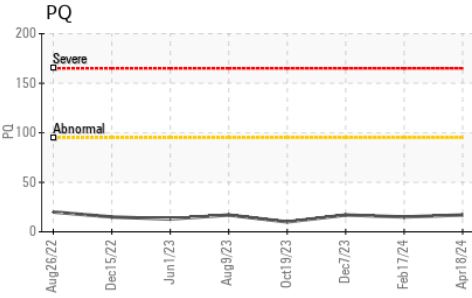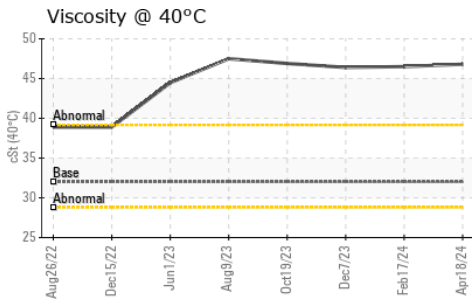

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0208960 **Received** : 22 Apr 2024
Lab Number : 06156217 **Tested** : 23 Apr 2024
Unique Number : 10991640 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WAKE STONE CORP
 6811 HWY 64 EAST
 KNIGHTDALE, NC
 US 27545

Contact: PAUL SPRUILL
 paulspruill@wakestonecorp.com

T:
 F: