



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**JOHN DEERE 700L 1T0700LXTPF440911**  
 Component  
**Left Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WE0006939</b>	---	---
Sample Date		Client Info		<b>15 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>463</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>ATTENTION</b>	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>91</b>	---	---
Iron	ppm	ASTM D5185m	>750	<b>177</b>	---	---
Chromium	ppm	ASTM D5185m	>9	<b>2</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>15	<b>3</b>	---	---
Copper	ppm	ASTM D5185m	>40	<b>2</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>33</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.075	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>MODER</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	---	---

## FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>51	<b>5</b>	---	---
Boron	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Barium	ppm	ASTM D5185m		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>108</b>	---	---
Calcium	ppm	ASTM D5185m		<b>3712</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>1075</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1258</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>4041</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>52.4</b>	---	---

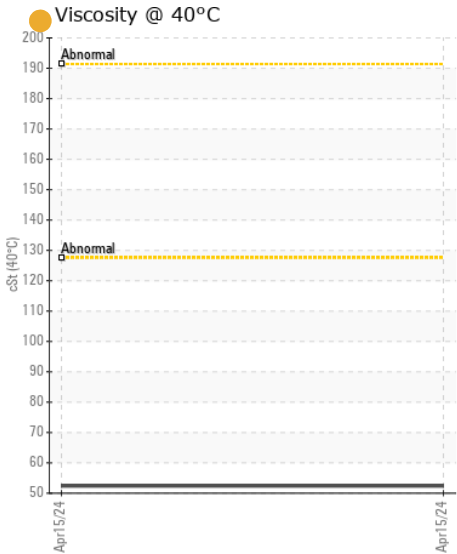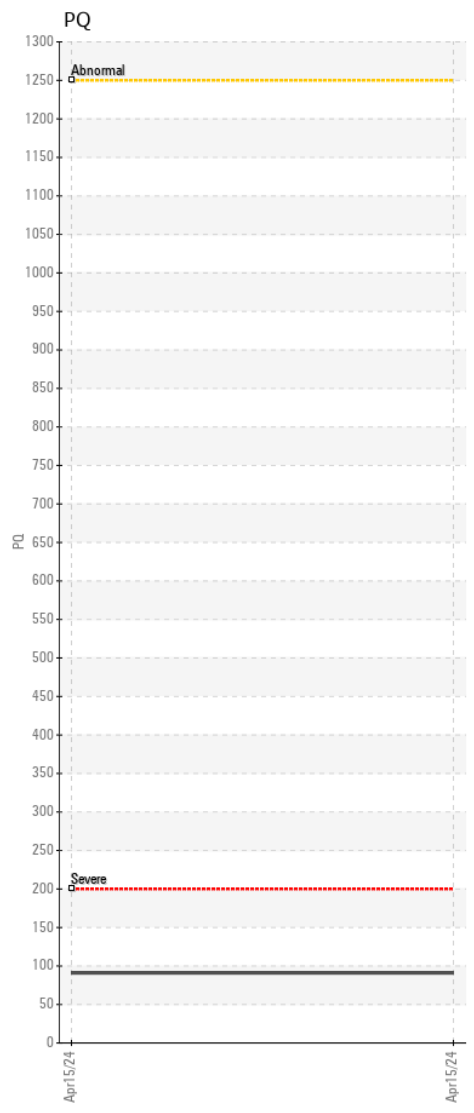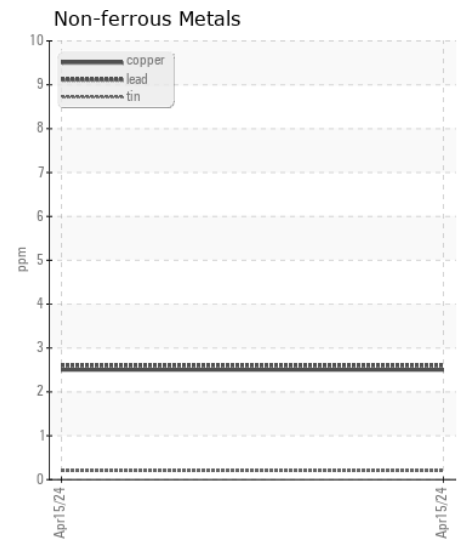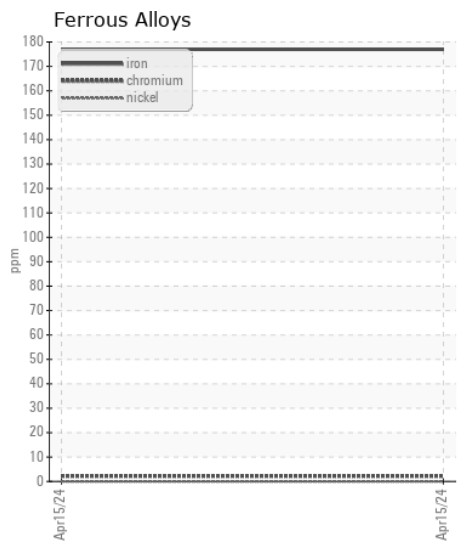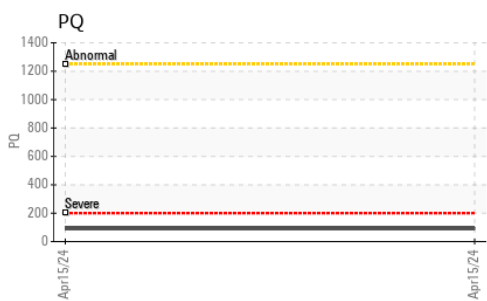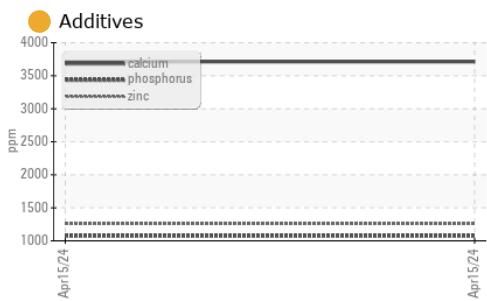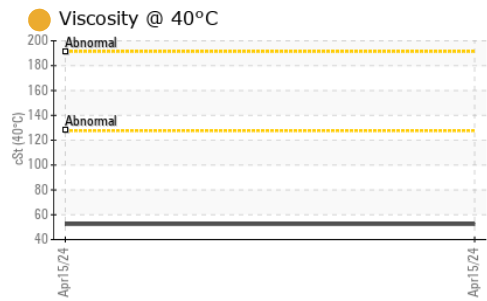

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WE0006939 **Received** : 22 Apr 2024  
**Lab Number** : 06156225 **Tested** : 23 Apr 2024  
**Unique Number** : 10991648 **Diagnosed** : 24 Apr 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT**  
 P.O. BOX 412  
 NORTHPORT, AL  
 US 35476  
 Contact: PAMELA CLARK  
 pamela@warriortractor.com  
 T: (205)339-0300  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)