



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 250G 1FF250GXKMF611692

Component
Swing Drive Gear Case

Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212397	JR0186195	---
Sample Date		Client Info		19 Apr 2024	11 Oct 2023	---
Machine Age	hrs	Client Info		1464	1053	---
Oil Age	hrs	Client Info		411	1053	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		12	379	---
Iron	ppm	ASTM D5185m	>200	<1	▲ 290	---
Chromium	ppm	ASTM D5185m	>10	<1	8	---
Nickel	ppm	ASTM D5185m	>10	0	1	---
Titanium	ppm	ASTM D5185m		0	1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m		0	3	---
Lead	ppm	ASTM D5185m		0	<1	---
Copper	ppm	ASTM D5185m		2	1	---
Tin	ppm	ASTM D5185m		0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		2	▲ 77	---
Potassium	ppm	ASTM D5185m	>20	0	5	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	0	---
Boron	ppm	ASTM D5185m		0	49	---
Barium	ppm	ASTM D5185m		1	4	---
Molybdenum	ppm	ASTM D5185m		<1	1	---
Manganese	ppm	ASTM D5185m		1	10	---
Magnesium	ppm	ASTM D5185m		3	2	---
Calcium	ppm	ASTM D5185m		10	38	---
Phosphorus	ppm	ASTM D5185m		319	485	---
Zinc	ppm	ASTM D5185m		1	38	---
Sulfur	ppm	ASTM D5185m		21053	15745	---
Visc @ 40°C	cSt	ASTM D445		142	184	---

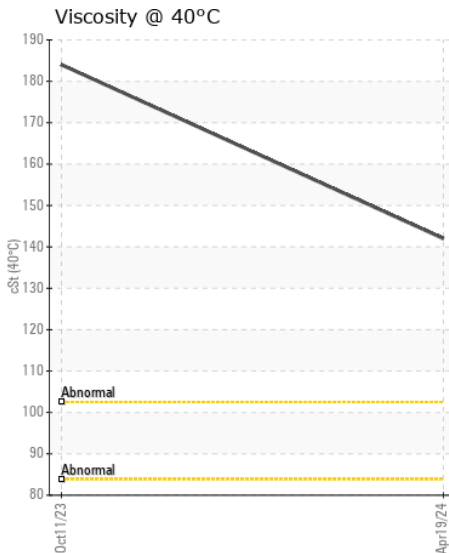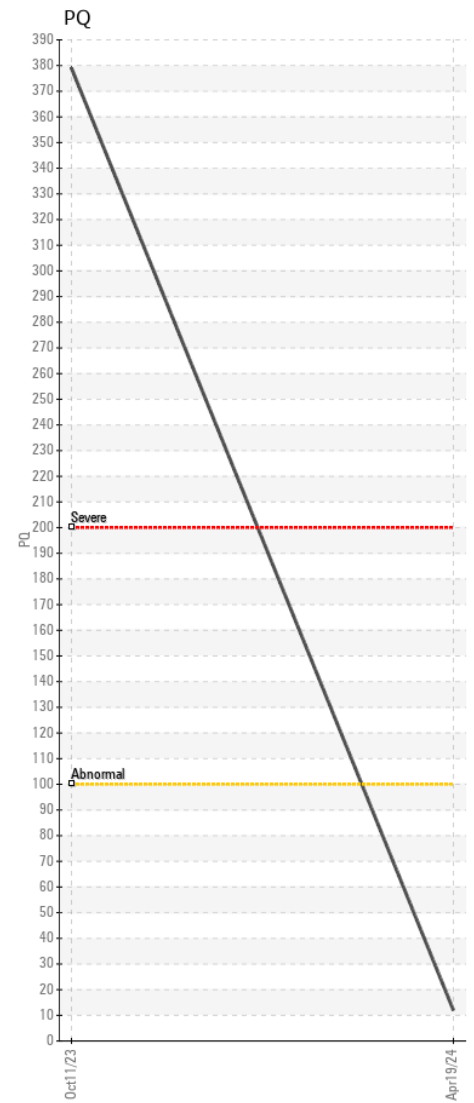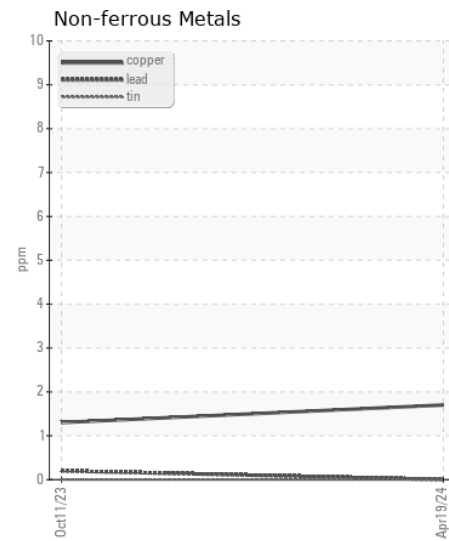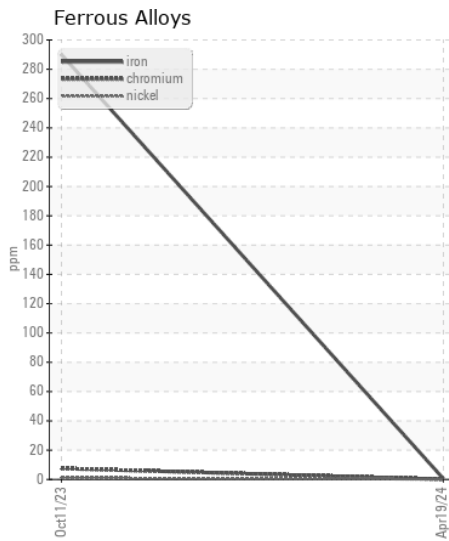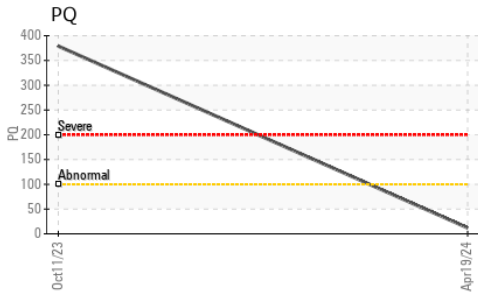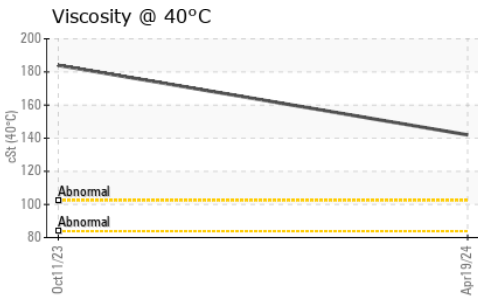

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212397 **Received** : 22 Apr 2024
Lab Number : 06156230 **Tested** : 23 Apr 2024
Unique Number : 10991653 **Diagnosed** : 24 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529

Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260
 F: (919)779-5432