



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 644L 1DW644LZJLL706347
 Component
Front Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0208971	JR0200667	JR0186589
Sample Date		Client Info		19 Apr 2024	09 Feb 2024	06 Nov 2023
Machine Age	hrs	Client Info		7471	6993	6521
Oil Age	hrs	Client Info		6054	6526	6521
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		9	12	6
Iron	ppm	ASTM D5185m	>500	47	22	10
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	1	<1
Lead	ppm	ASTM D5185m	>25	23	19	14
Copper	ppm	ASTM D5185m	>100	16	10	5
Tin	ppm	ASTM D5185m	>10	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	19	5	4
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	1
Boron	ppm	ASTM D5185m	6	29	29	29
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	23	23	22
Manganese	ppm	ASTM D5185m		2	0	0
Magnesium	ppm	ASTM D5185m	145	164	156	152
Calcium	ppm	ASTM D5185m	3570	3310	3249	3051
Phosphorus	ppm	ASTM D5185m	1290	1042	968	884
Zinc	ppm	ASTM D5185m	1640	1191	1282	1137
Sulfur	ppm	ASTM D5185m		3949	3438	3334
Visc @ 40°C	cSt	ASTM D445	57.0	54.3	54.8	56.5

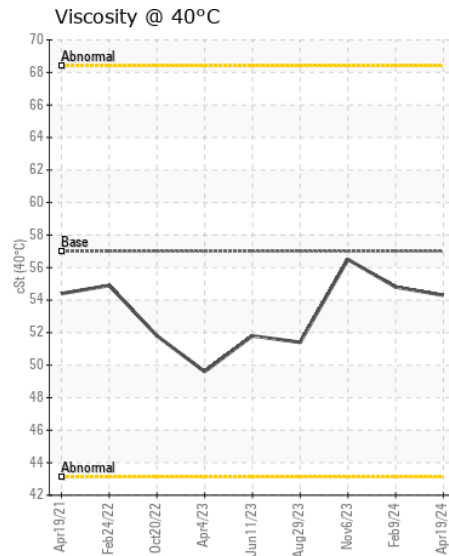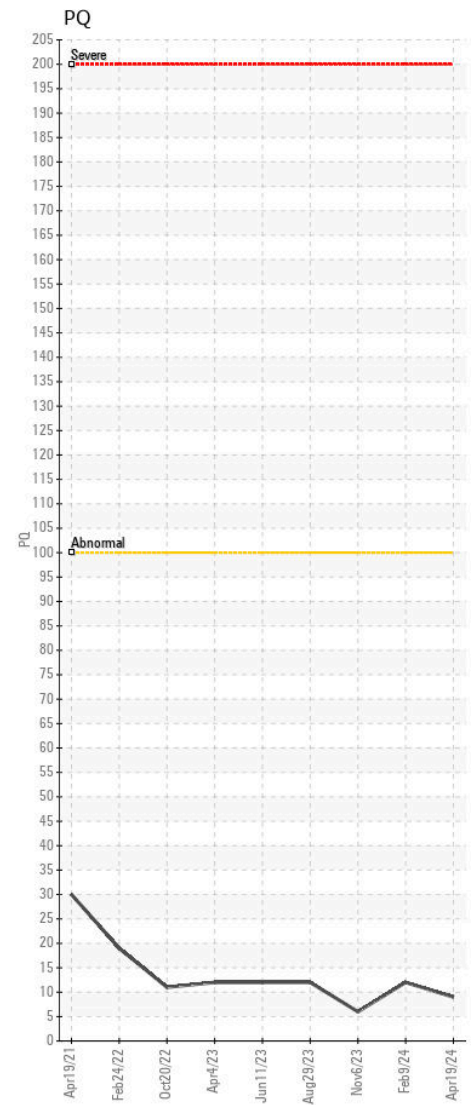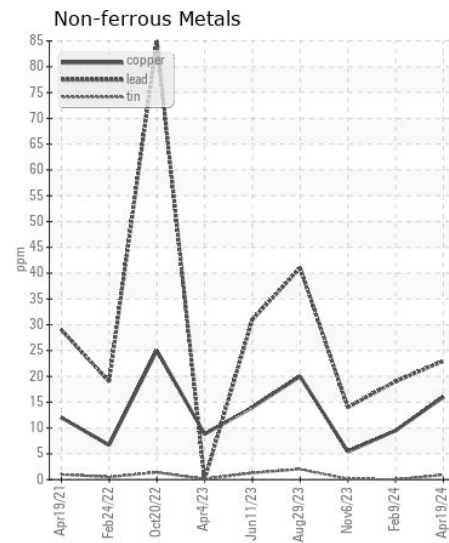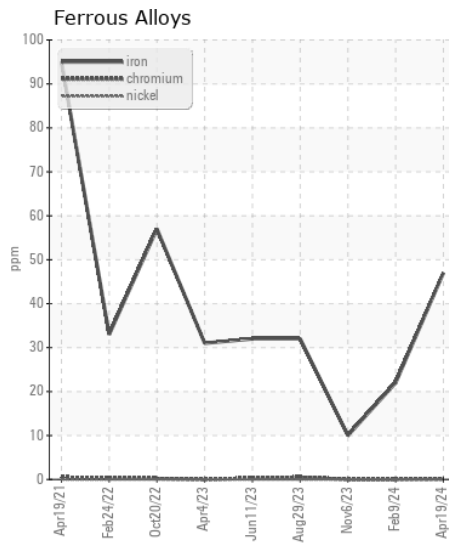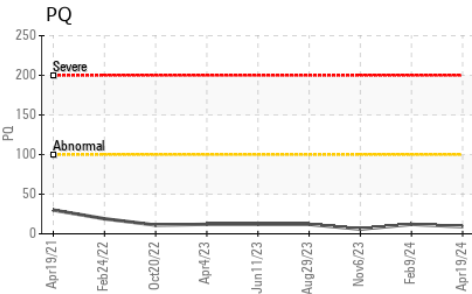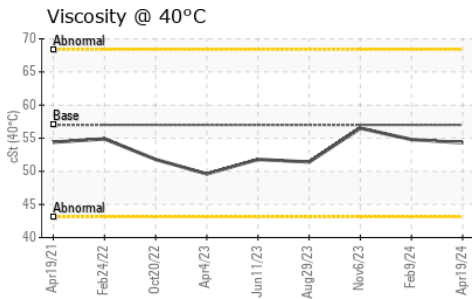

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0208971 **Received** : 22 Apr 2024
Lab Number : 06156240 **Tested** : 23 Apr 2024
Unique Number : 10991663 **Diagnosed** : 23 Apr 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - GREENVILLE
 3604 HIGHWAY 264 E
 GREENVILLE, NC
 US 27834-5800

Contact: GREENVILLE SHOP
 christopher.martin@jamesriverequipment.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)