



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 3 - Norton
Machine Id
HASKO LINE 3 LUG CHAIN (S/N BV413180)
Component
Speed Reducer
Fluid
CHEVRON DELO GEAR ESI OIL 80W90 (3 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0045211	LEC0040087	LEC0038279
Sample Date		Client Info		09 Apr 2024	11 Jul 2023	03 Apr 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		60	39	54
Iron	ppm	ASTM D5185m	>150	55	57	67
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	0	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>50	2	0	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	1	3	1
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	0
Boron	ppm	ASTM D5185m	15	16	17	18
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	0	3	3	3
Manganese	ppm	ASTM D5185m		2	<1	1
Magnesium	ppm	ASTM D5185m	0	3	2	0
Calcium	ppm	ASTM D5185m	5	62	67	113
Phosphorus	ppm	ASTM D5185m	600	482	517	500
Zinc	ppm	ASTM D5185m	0	41	44	31
Sulfur	ppm	ASTM D5185m	22000	11248	12129	12615
Visc @ 40°C	cSt	ASTM D445	140	185	184	182

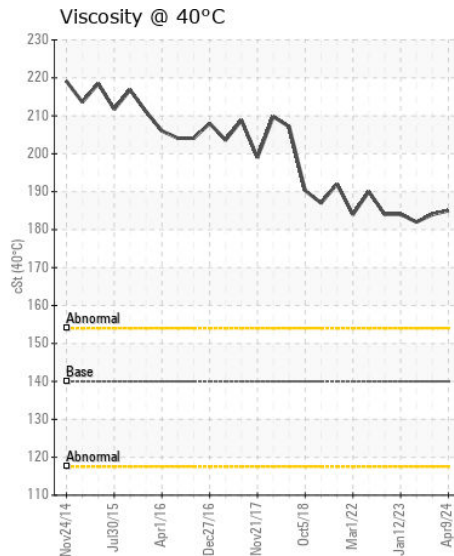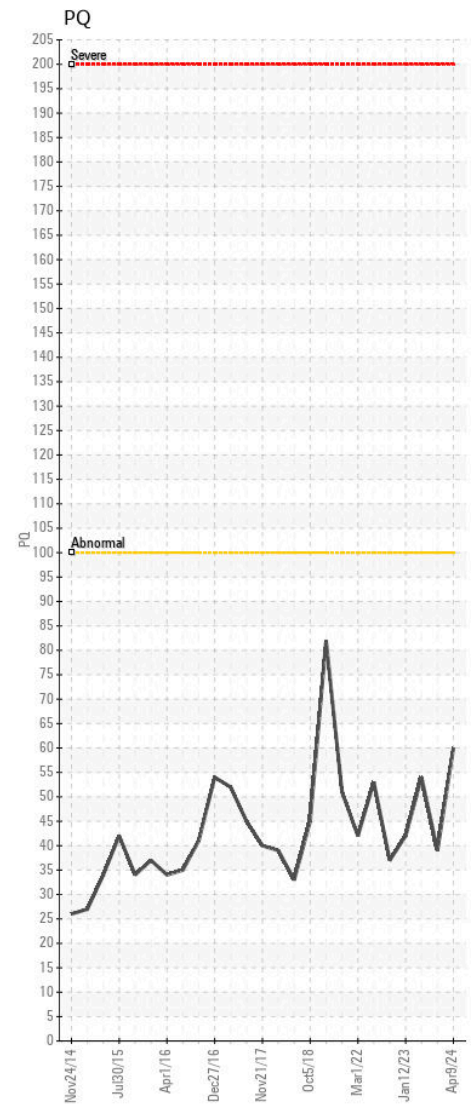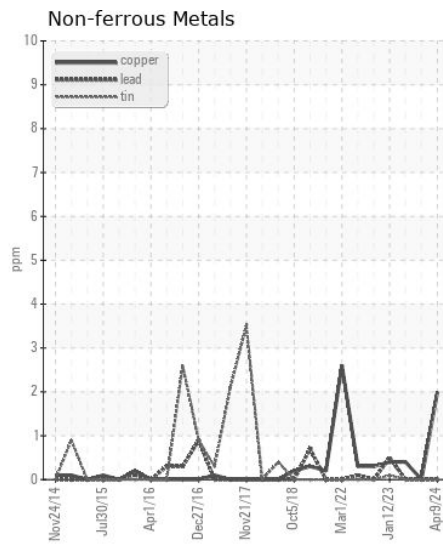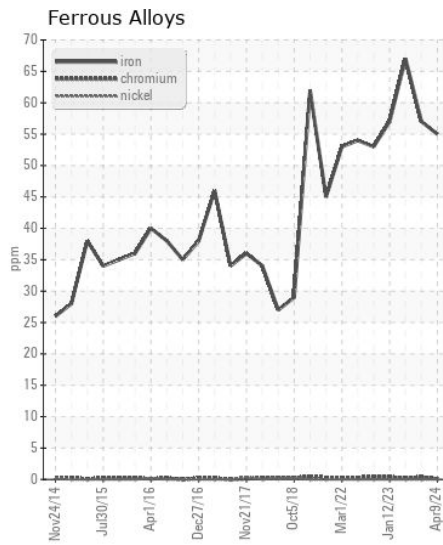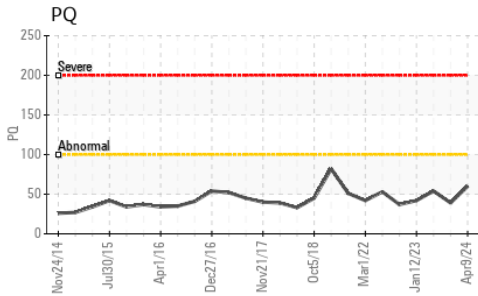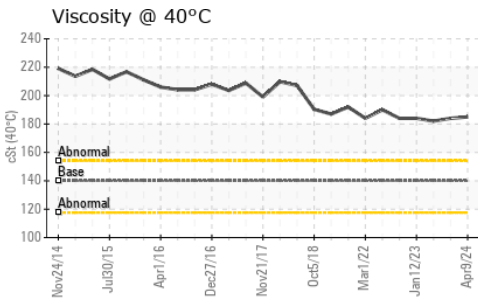

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0045211 **Received** : 22 Apr 2024
Lab Number : **06156252** **Tested** : 23 Apr 2024
Unique Number : 10991675 **Diagnosed** : 24 Apr 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

ARMSTRONG WOOD PRODUCTS
 PO BOX 160
 BEVERLY, WV
 US 26253
 Contact: JAMES THOMPSON
 James.Thompson@AHFProducts.com
 T: (304)338-7614
 F: (304)338-4105

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)